



IEC 61784-1

Edition 5.0 2019-04

INTERNATIONAL STANDARD



**Industrial communication networks – Profiles –
Part 1: Fieldbus profiles**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.100.20; 35.240.50

ISBN 978-2-8322-6724-0

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	15
INTRODUCTION.....	17
1 Scope.....	18
2 Normative references	19
3 Terms, definitions, abbreviated terms, symbols, and conventions	23
3.1 Terms and definitions.....	23
3.2 Abbreviations and symbols	24
3.2.1 IEC 61158 abbreviations and symbols	24
3.2.2 Other abbreviations and symbols.....	24
3.3 Conventions.....	24
3.3.1 Conventions common to all layers	24
3.3.2 Physical layer	26
3.3.3 Data-link layer	26
3.3.4 Application layer.....	27
4 Conformance to communication profiles	27
5 Communication Profile Family 1 (FOUNDATION™ fieldbus)	28
5.1 General overview	28
5.2 Profile 1/1 (FOUNDATION™ H1)	29
5.2.1 Physical layer	29
5.2.2 Data-link layer	45
5.2.3 Application layer.....	115
5.3 Profile 1/2 (FOUNDATION™ HSE).....	117
5.3.1 Physical layer	117
5.3.2 Data-link layer	117
5.3.3 Network layer	117
5.3.4 Transport layer	117
5.3.5 Application layer.....	117
5.4 Profile 1/3 (FOUNDATION™ H2)	118
5.4.1 Physical layer	118
5.4.2 Data-link layer	121
5.4.3 Application layer.....	121
6 Communication Profile Family 2 (CIP™).....	121
6.1 General overview	121
6.2 Profile 2/1 (ControlNet).....	122
6.2.1 Physical layer	122
6.2.2 Data-link layer	123
6.2.3 Application layer.....	125
6.3 Profile 2/2 (EtherNet/IP).....	126
6.3.1 Physical layer	126
6.3.2 Data-link layer	127
6.3.3 Application layer.....	128
6.4 Profile 2/3 (DeviceNet).....	130
6.4.1 Physical layer	130
6.4.2 Data-link layer	131
6.4.3 Application layer.....	132
7 Communication Profile Family 3 (PROFIBUS & PROFINET)	134

7.1	General overview	134
7.2	Profile 3/1 (PROFIBUS DP).....	135
7.2.1	Physical layer	135
7.2.2	Data-link layer	137
7.2.3	Application layer	162
7.3	Profile 3/2 (PROFIBUS PA).....	219
7.3.1	Physical layer	219
7.3.2	Data-link layer	223
7.3.3	Application layer	235
8	Communication Profile Family 4 (P-NET®)	236
8.1	General overview	236
8.2	Profile 4/1 (P-NET RS-485).....	236
8.2.1	Physical layer	236
8.2.2	Data-link layer	237
8.2.3	Application layer	238
9	Communication Profile Family 5 (WorldFIP®)	239
9.1	General overview	239
9.2	Profile 5/1 (WorldFIP)	240
9.2.1	Physical layer	240
9.2.2	Data-link layer	242
9.2.3	Application layer	245
9.3	Profile 5/2 (WorldFIP)	251
9.3.1	Physical layer	251
9.3.2	Data-link layer	251
9.3.3	Application layer	251
9.4	Profile 5/3 (WorldFIP)	257
9.4.1	Physical layer	257
9.4.2	Data-link layer	257
9.4.3	Application layer	257
10	Communication Profile Family 6 (INTERBUS®)	258
10.1	General overview	258
10.2	Profile 6/1	259
10.2.1	Physical layer	259
10.2.2	Data-link layer	261
10.2.3	Application layer	263
10.3	Profile 6/2	264
10.3.1	Physical layer	264
10.3.2	Data-link layer	265
10.3.3	Application layer	266
10.4	Profile 6/3	267
10.4.1	Physical layer	267
10.4.2	Data-link layer	267
10.4.3	Application layer	268
11	Communication Profile Family 7 – <i>Void</i>	269
12	Communication Profile Family 8 (CC-Link).....	270
12.1	General overview	270
12.1.1	General	270
12.1.2	Profile 8/1	270

12.1.3	Profile 8/2	271
12.1.4	Profile 8/3	271
12.2	Profile 8/1	271
12.2.1	Physical layer	271
12.2.2	Data-link layer	273
12.2.3	Application layer	276
12.3	Profile 8/2	279
12.3.1	Physical layer	279
12.3.2	Data-link layer	279
12.3.3	Application layer	279
12.4	Profile 8/3	279
12.4.1	Physical layer	279
12.4.2	Data-link layer	281
12.4.3	Application layer	284
13	Communication Profile Family 9 (HART®)	287
13.1	General Overview	287
13.2	Profile 9/1, HART®	287
13.2.1	Physical layer	287
13.2.2	Data-link layer	288
13.2.3	Application layer	289
13.3	Profile 9/2, WirelessHART®	290
14	Communication Profile Family 16 (SERCOS)	290
14.1	General overview	290
14.2	Profile 16/1 (SERCOS I)	290
14.2.1	Physical layer selection	290
14.2.2	Data-link layer	291
14.2.3	Application layer	292
14.3	Profile 16/2 (SERCOS II)	292
14.3.1	Physical layer	292
14.3.2	Data-link layer	293
14.3.3	Application layer	294
15	Communication Profile Family 19 (MECHATROLINK)	294
15.1	General overview	294
15.2	Profile 19/1 (MECHATROLINK-II)	294
15.2.1	Physical layer selection	294
15.2.2	Data-link layer	296
15.2.3	Application layer	305
15.3	Profile 19/2 (M-III)	311
15.3.1	Physical layer	311
15.3.2	Data-link layer	312
15.3.3	Application layer	320
Annex A (informative)	Communication concepts	326
A.1	CPF 1 (FOUNDATION Fieldbus) communication concepts	326
A.1.1	Overview	326
A.1.2	Physical layer characteristics	326
A.1.3	Data-link layer characteristics	326
A.1.4	Application layer characteristics	327
A.1.5	Management characteristics	327

A.2	CPF 2 (CIP) communication concepts	327
A.2.1	Overview	327
A.2.2	CIP common characteristics	328
A.2.3	ControlNet	328
A.2.4	EtherNet/IP	329
A.2.5	DeviceNet	330
A.3	CPF 3 (PROFIBUS & PROFINET) communication concepts	330
A.3.1	Basic characteristics	330
A.3.2	Physical layer profiles	331
A.3.3	Communication feature list (GSD)	332
A.4	CPF 4 (P-NET) communication concepts	332
A.5	CPF 5 (WorldFIP) communication concepts	333
A.5.1	Physical layer characteristics	333
A.5.2	Data-link layer characteristics	334
A.5.3	Application layer characteristics	334
A.6	CPF 6 (INTERBUS) communication concepts	334
A.7	CPF 8 (CC-LINK) communication concepts	336
A.7.1	Basic characteristics	336
A.7.2	Variants	336
A.8	CPF 9 (HART) communication concepts	337
A.9	CPF 16 (SERCOS) communication concepts	337
Annex B (informative) Added value of IEC 61784-1		339
Bibliography		340
Figure 1 – Communication profile families and profiles		18
Figure 2 – Example optical power budget for a 100/140 μm fiber system with a 16/16 optical passive star coupler		45
Figure 3 – CP 3/2 Slave devices usable in applications		135
Figure A.1 – Ring structure		337
Figure A.2 – Topology example		338
Table 1 – Relations of Communication Profile Families to type numbers		19
Table 2 – Layout of profile (sub)clause selection tables		25
Table 3 – Contents of (sub)clause selection tables		25
Table 4 – Layout of service selection tables		25
Table 5 – Contents of service selection tables		26
Table 6 – Layout of parameter selection tables		26
Table 7 – Contents of parameter selection tables		26
Table 8 – Layout of class attribute selection tables		27
Table 9 – Contents of class attribute selection tables		27
Table 10 – CPF 1: overview of profile sets		29
Table 11 – CP 1/1: PhL selection for communicating devices and their MAUs		29
Table 12 – CP 1/1: PhL classification of MAUs and attached devices		31
Table 13 – CP 1/1: PhL selection of Clause 16 for devices and their MAUs		32
Table 14 – CP 1/1: PhL selection of Clause 12 for devices and their MAUs		33
Table 15 – Void		33

Table 16 – CP 1/1: PhL selection of recommended IS parameters for MAU classes 111, 112, 121, 122, 511 and 512	34
Table 17 – CP 1/1: PhL selection for media components.....	35
Table 18 – CP 1/1: PhL selection of imperative IS parameters for media in FISCO systems	36
Table 19 – CP 1/1: PhL selection for power supplies.....	37
Table 20 – CP 1/1: PhL selection of power supply types	38
Table 21 – CP 1/1: PhL selection of permissible output voltage and IS parameters for FISCO power supplies	38
Table 22 – CP 1/1: PhL selection for terminators	39
Table 23 – CP 1/1: PhL selection of IS parameters for terminators	40
Table 24 – CP 1/1: PhL selection of Clause 12 for intrinsic safety barriers	40
Table 25 – CP 1/1: PhL selection of recommended IS parameters for intrinsic safety barriers and galvanic isolators (Entity model only)	41
Table 26 – CP 1/1: PhL selection of Clause 12 for intrinsically safe galvanic isolators	42
Table 27 – CP 1/1: PhL selection of Clause 15, recommended optical fiber types	43
Table 28 – CP 1/1: PhL selection of passive star couplers, recommended maximum insertion loss	43
Table 29 – CP 1/1: PhL selection of active star couplers.....	44
Table 30 – CP 1/1: Optical power budget considerations	44
Table 31 – CP 1/1: DLL service selection.....	46
Table 32 – CP 1/1: DLL service selection of Clause 5	46
Table 33 – CP 1/1: DLL service selection of 5.4.....	46
Table 34 – CP 1/1: DLL service selection of 5.4.1	47
Table 35 – CP 1/1: DLL service selection of 5.4.3	47
Table 36 – CP 1/1: DLL service selection of 5.4.6	48
Table 37 – CP 1/1: DLL service selection of Clause 6	48
Table 38 – CP 1/1: DLL service selection of the summary of 6.3, DL-connection QoS.....	49
Table 39 – CP 1/1: DLL service selection of Figures 9 to 14 of 6.4.....	49
Table 40 – CP 1/1: DLL service selection of 6.5.....	50
Table 41 – CP 1/1: DLL service selection: replacement for Table 13 of 6.5	51
Table 42 – CP 1/1: DLL service selection of 6.5, replacement for Table 14	52
Table 43 – CP 1/1: DLL service selection of 6.5 for use of addresses for peer DLC	52
Table 44 – CP 1/1: DLL service selection of 6.5 for use of addresses for multipeer DLC connect request at publisher	52
Table 45 – CP 1/1: DLL service selection of 6.5 for use of addresses for multipeer DLC connect request at subscriber	52
Table 46 – CP 1/1: DLL service selection of 6.6.....	53
Table 47 – CP 1/1: DLL service selection: replacement for Table 15 of 6.6	53
Table 48 – CP 1/1: DLL service selection of 6.7.....	54
Table 49 – CP 1/1: DLL service selection of 6.7, replacement for Table 16	54
Table 50 – CP 1/1: DLL service selection of 6.7, replacement for Table 17	54
Table 51 – CP 1/1: DLL service selection of 6.7, replacement for Table 18	55
Table 52 – CP 1/1: DLL service selection of Clause 7	55
Table 53 – CP 1/1: DLL service selection of 7.5, replacement for Table 23	56

Table 54 – CP 1/1: DLL service selection of Clause 8	57
Table 55 – CP 1/1: DLL service selection of 8.5, replacement for Table 28	57
Table 56 – CP 1/1: DLL protocol selection	58
Table 57 – CP 1/1: DLL protocol selection of Clause 4.....	58
Table 58 – CP 1/1: DLL protocol selection of 4.3	59
Table 59 – CP 1/1: DLL protocol selection of 4.3.2.1 for use of link designators.....	59
Table 60 – CP 1/1: DLL protocol selection of 4.3.2.2 for use of node designators	59
Table 61 – CP 1/1: DLL protocol selection of 4.3.3.1 for predefined flat non–local DL-addresses	60
Table 62 – CP 1/1: DLL protocol selection of 4.3.3.2 for predefined flat link–local DL-addresses	60
Table 63 – CP 1/1: DLL protocol selection of 4.3.3.3 for predefined node–local DL-addresses	60
Table 64 – CP 1/1: DLL protocol selection of 4.7	61
Table 65 – CP 1/1: DLL protocol selection of 4.7.4.....	62
Table 66 – CP 1/1: DLL protocol selection of 4.7.5.....	63
Table 67 – CP 1/1: DLL protocol selection of Clause 6.....	64
Table 68 – CP 1/1: DLL protocol selection, replacement for Table 10 of 6.0.....	65
Table 69 – CP 1/1: DLL protocol selection of 6.5	66
Table 70 – CP 1/1: DLL protocol selection of 6.7	69
Table 71 – CP 1/1: DLL protocol selection of 6.8	73
Table 72 – CP 1/1: DLL protocol selection of 6.11.....	74
Table 73 – CP 1/1: DLL protocol selection of 6.12.....	74
Table 74 – CP 1/1: DLL protocol selection of 6.15.....	75
Table 75 – CP 1/1: DLL protocol selection of 6.20.....	76
Table 76 – CP 1/1: DLL protocol selection of Clause 7.....	77
Table 77 – CP 1/1: DLL protocol selection of 7.4	78
Table 78 – CP 1/1: DLL protocol selection of Clause 8.....	79
Table 79 – CP 1/1: DLL protocol selection of 8.2	80
Table 80 – CP 1/1: DLL protocol selection of 8.2.2.....	90
Table 81 – CP 1/1: DLL protocol selection of 8.3	103
Table 82 – CP 1/1: DLL protocol selection of 8.4	103
Table 83 – CP 1/1: DLL protocol selection of Clause 9.....	105
Table 84 – CP 1/1: DLL protocol selection of 9.3	105
Table 85 – CP 1/1: DLL protocol selection of 9.3.5.....	107
Table 86 – CP 1/1: DLL protocol selection of 9.3.5.2.2, replacement for element encoding.....	108
Table 87 – CP 1/1: DLL protocol selection of Clause 10.....	109
Table 88 – CP 1/1: DLL protocol selection of 10.2.....	109
Table 89 – CP 1/1: DLL protocol selection of 10.3.....	110
Table 90 – CP 1/1: DLL protocol selection of 10.3.7, specification of errors	112
Table 91 – CP 1/1: DLL protocol selection of 10.4.....	113
Table 92 – CP 1/1: DLL protocol selection of 10.5.....	114
Table 93 – CP 1/1: DLL protocol selection of 10.6.....	115

Table 94 – CP 1/1: AL service selection.....	115
Table 95 – CP 1/1: AL data type selection of Clause 4.....	116
Table 96 – CP 1/1: AL protocol selection	116
Table 97 – CP 1/2: AL service selection.....	117
Table 98 – CP 1/2: AL protocol selection	118
Table 99 – CP 1/3: PhL selection for H2 devices.....	119
Table 100 – CP 1/3: PhL selection for H2 media and related components.....	120
Table 101 – CPF 2: overview of profile sets	122
Table 102 – CP 2/1: PhL selection	122
Table 103 – CP 2/1: DLL service selection.....	124
Table 104 – CP 2/1: DLL protocol selection	124
Table 105 – CP 2/1: DLL protocol selection of management objects	125
Table 106 – CP 2/1: AL service selection.....	125
Table 107 – CP 2/1: AL protocol selection	126
Table 108 – CP 2/2: DLL protocol selection	127
Table 109 – CP 2/2: DLL protocol selection of management objects	128
Table 110 – CP 2/2: AL service selection.....	129
Table 111 – CP 2/2: AL protocol selection	130
Table 112 – CP 2/3: DLL protocol selection	131
Table 113 – CP 2/3: DLL protocol selection of management objects	132
Table 114 – CP 2/3: AL service selection.....	132
Table 115 – CP 2/3: AL protocol selection	133
Table 116 – CPF 3: overview of profile sets.....	134
Table 117 – CP 3/1: PhL selection	135
Table 118 – CP 3/1: PhL selection of Clause 3	137
Table 119 – CP 3/1: PhL selection of Clause 4	137
Table 120 – CP 3/1: General DLL service selection	138
Table 121 – CP 3/1: DLL service selection for DP-V0 master (class 1).....	139
Table 122 – CP 3/1: DLM service selection for DP-V0 master (class 1).....	140
Table 123 – CP 3/1: DLL service selection for DP-V1 master (class 1).....	141
Table 124 – CP 3/1: DLM service selection for DP-V1 master (class 1).....	142
Table 125 – CP 3/1: DLL service selection for DP-V0 master (class 2).....	143
Table 126 – CP 3/1: DLL service selection for DP-V1 master (class 2).....	144
Table 127 – CP 3/1: DLL service selection for DP-V0 slave	145
Table 128 – CP 3/1: DLM service selection for DP-V0 slave	146
Table 129 – CP 3/1: DLL service selection for DP-V1 slave	147
Table 130 – CP 3/1: DLM service selection for DP-V1 slave	148
Table 131 – CP 3/1: General DLL protocol selection	149
Table 132 – CP 3/1: DLL protocol selection of Clause 5.....	149
Table 133 – CP 3/1: DLL protocol selection of Clause 6.....	150
Table 134 – CP 3/1: DLL protocol selection of Clause 7.....	150
Table 135 – CP 3/1: Time variable selection for DP-V0 master (class 1).....	151
Table 136 – CP 3/1: Timer and counter selection for DP-V0 master (class 1).....	152

Table 137 – CP 3/1: DLPDU selection for DP-V0 master (class 1)	152
Table 138 – CP 3/1: MAC state selection for DP-V0 master (class 1).....	153
Table 139 – CP 3/1: Time selection for DP-V1 master (class 1)	154
Table 140 – CP 3/1: Timer and counter selection for DP-V1 master (class 1).....	155
Table 141 – CP 3/1: DLPDU selection for DP-V1 master (class 1)	155
Table 142 – CP 3/1: MAC state selection for DP-V1 master (class 1).....	156
Table 143 – CP 3/1: CS protocol selection for DP-V1 master (class 1).....	156
Table 144 – CP 3/1: Time selection for DP-V1 master (class 2)	157
Table 145 – CP 3/1: Timer and counter selection for DP-V1 master (class 2).....	157
Table 146 – CP 3/1: DLPDU selection for DP-V1 master (class 2)	158
Table 147 – CP 3/1: Time selection for DP-V0 slave	158
Table 148 – CP 3/1: Timer and counter selection for DP-V0 slave	159
Table 149 – CP 3/1: DLPDU selection for DP-V0 slave	159
Table 150 – CP 3/1: MAC state selection for DP-V0 slave.....	160
Table 151 – CP 3/1: Time selection for DP-V1 slave	160
Table 152 – CP 3/1: Timer and counter selection for DP-V1 slave	161
Table 153 – CP 3/1: DLPDU selection for DP-V1 slave	161
Table 154 – CP 3/1: CS protocol selection for DP-V1 slave.....	162
Table 155 – CP 3/1, 3/2: AL service selection	162
Table 156 – CP 3/1, 3/2: AL service selection of Clause 6	163
Table 157 – CP 3/1, 3/2: AL service selection of I/O data ASE	163
Table 158 – CP 3/1, 3/2: AL service selection of Diagnosis ASE	164
Table 159 – CP 3/1, 3/2: AL service selection of Context ASE	164
Table 160 – CP 3/1, 3/2: AL service selection of Management ASE	165
Table 161 – CP 3/1, 3/2: AL service selection of AR ASE	166
Table 162 – CP 3/1, 3/2: AL service selection of Clause 6	167
Table 163 – CP 3/1, 3/2: AL service selection of Process data ASE.....	167
Table 164 – CP 3/1, 3/2: AL service selection of I/O data ASE.....	168
Table 165 – CP 3/1, 3/2: AL service selection of Alarm ASE	168
Table 166 – CP 3/1, 3/2: AL service selection of Context ASE	168
Table 167 – CP 3/1, 3/2: AL service selection of Load region ASE.....	169
Table 168 – CP 3/1, 3/2: AL service selection of Function invocation ASE	169
Table 169 – CP 3/1, 3/2: AL service selection of Time ASE	169
Table 170 – CP 3/1, 3/2: AL service selection of AR ASE	170
Table 171 – CP 3/1, 3/2: AL service selection of Clause 6	171
Table 172 – CP 3/1, 3/2: AL service selection of I/O data ASE.....	171
Table 173 – CP 3/1, 3/2: AL service selection of Diagnosis ASE	172
Table 174 – CP 3/1, 3/2: AL service selection of Context ASE	172
Table 175 – CP 3/1, 3/2: AL service selection of Management ASE	172
Table 176 – CP 3/1, 3/2: AL service selection of AR ASE	173
Table 177 – CP 3/1, 3/2: AL service selection of Clause 6	174
Table 178 – CP 3/1, 3/2: AL service selection of Process data ASE.....	174
Table 179 – CP 3/1, 3/2: AL service selection of Context ASE	175

Table 180 – CP 3/1, 3/2: AL service selection of Load region ASE.....	175
Table 181 – CP 3/1, 3/2: AL service selection of Function invocation ASE	176
Table 182 – CP 3/1, 3/2: AL service selection of Time ASE	176
Table 183 – CP 3/1, 3/2: AL service selection of AR ASE	177
Table 184 – CP 3/1, 3/2: AL service selection of Clause 6	178
Table 185 – CP 3/1, 3/2: AL service selection of I/O data ASE.....	179
Table 186 – CP 3/1, 3/2: AL service selection of Diagnosis ASE	180
Table 187 – CP 3/1, 3/2: AL service selection of Context ASE	181
Table 188 – CP 3/1, 3/2: AL service selection of AR ASE	182
Table 189 – CP 3/1, 3/2: AL service selection of Clause 6	183
Table 190 – CP 3/1, 3/2: AL service selection of Process data ASE.....	183
Table 191 – CP 3/1, 3/2: AL service selection of I/O data ASE.....	184
Table 192 – CP 3/1, 3/2: AL service selection of diagnosis ASE	184
Table 193 – CP 3/1, 3/2: AL service selection of Alarm ASE	185
Table 194 – CP 3/1, 3/2: AL service selection of Context ASE	185
Table 195 – CP 3/1, 3/2: AL service selection of Load region ASE.....	186
Table 196 – CP 3/1, 3/2: AL service selection of Function invocation ASE	186
Table 197 – CP 3/1, 3/2: AL service selection of Time ASE	186
Table 198 – CP 3/1, 3/2: AL service selection of AR ASE	187
Table 199 – CP 3/1, 3/2: AL protocol selection.....	188
Table 200 – CP 3/1, 3/2: AL protocol selection of Clause 4 to 11	188
Table 201 – CP 3/1, 3/2: AL protocol selection of APDUs	190
Table 202 – CP 3/1, 3/2: AL protocol selection of FSPM services primitives.....	191
Table 203 – CP 3/1, 3/2: AL protocol selection of DMPM services primitives.....	192
Table 204 – CP 3/1, 3/2: AL protocol selection of Clause 4 to 11	192
Table 205 – CP 3/1, 3/2: AL protocol selection of APDUs	194
Table 206 – CP 3/1, 3/2: AL protocol selection of FSPM services primitives.....	196
Table 207 – CP 3/1, 3/2: AL protocol selection of DMPM services primitives.....	197
Table 208 – CP 3/1, 3/2: AL protocol selection of Clause 4 to 6	198
Table 209 – CP 3/1, 3/2: AL protocol selection of APDUs	200
Table 210 – CP 3/1, 3/2: AL protocol selection of FSPM services primitives.....	201
Table 211 – CP 3/1, 3/2: AL protocol selection of DMPM services primitives.....	201
Table 212 – CP 3/1, 3/2: AL protocol selection of Clause 4 to 11	202
Table 213 – CP 3/1, 3/2: AL protocol selection of APDUs	204
Table 214 – CP 3/1, 3/2: AL protocol selection of FSPM services primitives.....	206
Table 215 – CP 3/1, 3/2: AL protocol selection of DMPM services primitives.....	207
Table 216 – CP 3/1, 3/2: AL protocol selection of Clause 4 to 11	207
Table 217 – CP 3/1, 3/2: AL protocol selection of APDU selection	209
Table 218 – CP 3/1, 3/2: AL protocol selection of FSPM services primitives.....	210
Table 219 – CP 3/1, 3/2: AL protocol selection of DMPM services primitives.....	211
Table 220 – CP 3/1, 3/2: AL protocol selection of Clause 4 to 11	212
Table 221 – CP 3/1, 3/2: AL protocol selection of APDUs	214
Table 222 – CP 3/1, 3/2: AL protocol selection of FSPM services primitives.....	215

Table 223 – CP 3/1, 3/2: AL protocol selection of DMPM services primitives.....	217
Table 224 – CP 3/2: PhL selection	219
Table 225 – CP 3/2: PhL selection of Clause 12 for devices and their MAUs.....	221
Table 226 – CP 3/2: PhL selection of recommended IS parameters	222
Table 227 – CP 3/2: PhL selection of Clause 21 for devices and their MAUs.....	222
Table 228 – CP 3/2: General DLL protocol selection	224
Table 229 – CP 3/2: DLL protocol selection of Clause 4.....	224
Table 230 – CP 3/2: DLL protocol selection of Clause 5.....	225
Table 231 – CP 3/2: DLL protocol selection of Clause 6.....	225
Table 232 – CP 3/2: DLL protocol selection of Clause 7.....	226
Table 233 – CP 3/2: Time variable selection for DP-V0 master (class 1).....	227
Table 234 – CP 3/2: Timer and counter selection for DP-V0 master (class 1).....	227
Table 235 – CP 3/2: DLPDU selection for DP-V0 master (class 1)	228
Table 236 – CP 3/2: Time variable selection for DP-V1 master (class 1).....	229
Table 237 – CP 3/2: Timer and counter selection for DP-V1 master (class 1).....	230
Table 238 – CP 3/2: DLPDU selection for DP-V1 master (class 1)	230
Table 239 – CP 3/2: Time variable selection for DP-V1 master (class 2).....	231
Table 240 – CP 3/2: Timer and counter selection for DP-V1 master (class 2).....	232
Table 241 – CP 3/2: DLPDU selection for DP-V1 master (class 2)	232
Table 242 – CP 3/2: Time variable selection for DP-V0 slave.....	233
Table 243 – CP 3/2: Timer and counter selection for DP-V0 slave	233
Table 244 – CP 3/2: DLPDU selection for DP-V0 slave	234
Table 245 – CP 3/2: Time variable selection for DP-V1 slave.....	234
Table 246 – CP 3/2: Timer and counter selection for DP-V1 slave	235
Table 247 – CP 3/2: DLPDU selection for DP-V1 slave	235
Table 248 – CP 4/1: PhL selection	237
Table 249 – CP 4/1: DLL service selection.....	238
Table 250 – CP 4/1: DLL protocol selection	238
Table 251 – CP 4/1: AL service selection.....	239
Table 252 – CP 4/1: AL protocol selection	239
Table 253 – CPF 5: overview of profile sets.....	240
Table 254 – CPF 5: PhL selection.....	241
Table 255 – CPF 5: DLL service selection.....	242
Table 256 – CPF 5: DLL service selection of Clause 4.....	243
Table 257 – CPF 5: DLL protocol selection	243
Table 258 – CPF 5: DLL protocol selection of variables and resources	244
Table 259 – CPF 5: DLL protocol selection of DLPDUs	244
Table 260 – CP 5/1: AL service selection.....	245
Table 261 – CP 5/1: AL service selection of ASEs	245
Table 262 – CPF 5: AL service selection of MPS ASEs.....	245
Table 263 – CPF 5: AL service selection of variable elements	246
Table 264 – CPF 5: AL service selection of produced variable elements	246
Table 265 – CPF 5: AL service selection of consumed variable elements.....	246

Table 266 – CP 5/1: AL service selection of MPS services.....	247
Table 267 – CP 5/1, 5/2: AL service selection of A_Readloc service parameters.....	247
Table 268 – CP 5/1, 5/2: AL service selection of A_Readfar service parameters.....	247
Table 269 – CP 5/1, 5/2: AL service selection of A_Read service parameters.....	248
Table 270 – CP 5/1: AL service selection of MCS service classes.....	248
Table 271 – CP 5/1: AL service selection of QoS.....	248
Table 272 – CP 5/1: AL service selection of MCS services.....	248
Table 273 – CP 5/1, 5/2: AL service selection of A_Data parameters.....	249
Table 274 – CP 5/1: AL protocol selection.....	249
Table 275 – CPF 5/1: AL protocol selection of MPS data types.....	249
Table 276 – CPF 5/1: AL protocol selection of MPS PDUs.....	249
Table 277 – CPF 5/1: AL protocol selection of MPS encoding rules.....	250
Table 278 – CP 5/1, 5/2: AL protocol selection of MCS PDUs.....	250
Table 279 – CP 5/1: AL protocol selection of MCS state machines.....	251
Table 280 – CP 5/2: AL service selection.....	251
Table 281 – CP 5/2: AL service selection of ASEs.....	252
Table 282 – CP 5/2: AL service selection of MPS services.....	252
Table 283 – CP 5/2: AL service selection of MCS service classes.....	252
Table 284 – CP 5/2: AL service selection of QoS.....	253
Table 285 – CP 5/2: AL service selection of MCS services.....	253
Table 286 – CP 5/2: AL service selection of domain services.....	253
Table 287 – CP 5/2: AL service selection of domain object attributes.....	254
Table 288 – CP 5/2: AL service selection of program services.....	254
Table 289 – CP 5/2: AL service selection of program object attributes.....	254
Table 290 – CP 5/2: AL service selection of variable services.....	255
Table 291 – CP 5/2: AL service selection of variable classes.....	255
Table 292 – CP 5/2: AL service selection of variable class attributes.....	255
Table 293 – CP 5/2: AL protocol selection.....	255
Table 294 – CP 5/2: AL protocol selection of MCS state machines.....	256
Table 295 – CP 5/2: AL protocol selection of sub-MMS coding rules.....	256
Table 296 – CP 5/2: AL protocol selection of sub-MMS PDUs.....	257
Table 297 – CP 5/3: AL service selection.....	257
Table 298 – CP 5/3: AL service selection of ASEs.....	258
Table 299 – CP 5/3: AL protocol selection.....	258
Table 300 – CPF 6: device CP identifier assignment.....	259
Table 301 – CPF 6: PhL selection.....	260
Table 302 – CP 6/1: DLL service selection, assignment of DLL services to device types.....	262
Table 303 – CPF 6: DLL protocol selection of data widths supported by master.....	263
Table 304 – CP 6/1: AL service selection, assignment of AL services to device types.....	264
Table 305 – CP 6/2: DLL service selection, assignment of DLL services to device types.....	265
Table 306 – CP 6/2: AL service selection, assignment of AL services to device types.....	266

Table 307 – CP 6/2: AL service selection of AR-Data-Send-Acknowledge service parameters	267
Table 308 – CP 6/3: DLL service selection, assignment of DLL services to device types.....	268
Table 309 – CP 6/3: AL service selection, assignment of AL services to device types.....	269
Table 310 – CP 8/1 transmission support level	271
Table 311 – CP 8/1 PhL selection	272
Table 312 – CP 8/1 DLL services selection	274
Table 313 – CP 8/1 DLL protocol selection	275
Table 314 – CP 8/1 AL services selection	277
Table 315 – CP 8/1 AL protocol selection	278
Table 316 – CP 8/2 DLL protocol selection	279
Table 317 – CP 8/3 PhL selection	280
Table 318 – CP 8/3 DLL services selection	282
Table 319 – CP 8/3 DLL protocol selection	283
Table 320 – CP 8/3 AL services selection	285
Table 321 – CP 8/3 AL protocol selection	286
Table 322 – CP 9/1 PhL selection	288
Table 323 – CP 9/1: DLL service selection.....	288
Table 324 – CP 9/1: DLL protocol selection	289
Table 325 – CP 9/1: AL service selection.....	289
Table 326 – CP 9/1: AL protocol selection	289
Table 327 – CP 16/1: PhL selection	291
Table 328 – CP 16/1: DLL protocol selection	292
Table 329 – CP 16/1: AL service selection.....	292
Table 330 – CP 16/2: PhL selection	293
Table 331 – CPF 19: overview of profile sets	294
Table 332 – CP 19/1 profile: PhL selection	295
Table 333 – CP 19/1: DLL service selection.....	296
Table 334 – DLL service selection for C1 master of CP 19/1.....	298
Table 335 – DLL service selection for C2 master of CP 19//1.....	298
Table 336 – DLL service selection for slave of CP 19//1.....	299
Table 337 – CP 19/1: DLL protocol selection	299
Table 338 – DLL protocol selection for C1 master of CP 19/1	301
Table 339 – DLL protocol selection for C2 master of CP 19/1	303
Table 340 – DLL protocol selection for slave of CP 19/1	304
Table 341 – CP 19/1: AL service selection.....	306
Table 342 – Class selection for C1 master of CP 19/1	307
Table 343 – Master class attribute selection for C1 master of CP 19/1.....	307
Table 344 – Master class service selection	307
Table 345 – FDCMaster-AR class attribute selection for C1 master of CP 19/1.....	307
Table 346 – FDCMaster-AR class service selection	308
Table 347 – Class selection for C2 master of CP 19/1	308
Table 348 – Monitor class attribute selection for C2 master of CP 19/1.....	308

Table 349 – Monitor class service selection	308
Table 350 – FDCMonitor-AR class attribute selection for C2 master of CP 19/1	309
Table 351 – FDCMonitor-AR class service selection	309
Table 352 – Class selection for slave AP of CP 19/1	309
Table 353 – Slave class attribute selection for slave AP of CP 19/1	310
Table 354 – Slave class service selection	310
Table 355 – FDCSlave-AR class attribute selection for slave AP of CP 19/1	310
Table 356 – FDCSlave-AR class service selection	310
Table 357 – CP 19/1: AL protocol selection	311
Table 358 – CP 19/2: DLL service selection	312
Table 359 – DLL service selection for C1 master of CP 19/2	313
Table 360 – DLL service selection for C2 master of CP 19/2	314
Table 361 – DLL service selection for slave of CP 19/2	314
Table 362 – CP 19/2: DLL protocol selection	315
Table 363 – DLL protocol selection for C1 master of CP 19/2	317
Table 364 – DLL protocol selection for C2 master of CP 19/2	318
Table 365 – DLL protocol selection for slave of CP 19/2	319
Table 366 – CP 19/2: AL service selection	321
Table 367 – Class selection for C1 master of CP 19/2	322
Table 368 – EventManager class attribute selection for C1 master of CP 19/2	322
Table 369 – EventManager class service selection	322
Table 370 – Class selection for C2 master of CP 19/2	323
Table 371 – EventManager class attribute selection for C2 master of CP 19/2	323
Table 372 – EventManager class service selection	323
Table 373 – Class selection for slave AP of CP 19/2	324
Table 374 – EventManager class attribute selection for slave AP of CP 19/2	324
Table 375 – EventManager class service selection	324
Table 376 – CP 19/2: AL protocol selection	325
Table A.1 – Number of devices per CP16/1 and CP16/2 systems (examples)	338

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**INDUSTRIAL COMMUNICATION NETWORKS –
PROFILES –****Part 1: Fieldbus profiles****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

Attention is drawn to the fact that the use of some of the associated protocol types is restricted by their intellectual-property-right holders. In all cases, the commitment to limited release of intellectual-property-rights made by the holders of those rights permits a layer protocol type to be used with other layer protocols of the same type, or in other type combinations explicitly authorized by their respective intellectual property right holders.

NOTE Combinations of protocol types are specified in IEC 61784-1 and IEC 61784-2.

International Standard IEC 61784-1 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial-process measurement, control and automation.

This fifth edition cancels and replaces the fourth edition published in 2014. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- update of the dated references to the IEC 61158 series, to IEC 61784-2, to the IEC 61784-3 series, to the IEC 61784-5 series and to IEC 61918 throughout the document;
- update of selection tables CPF 2, CPF 4 and CPF 8.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
65C/942/FDIS	65C/951/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61784 series, published under the general title *Industrial communication networks – Profiles*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This document provides a set of Communication Profiles (CP) in the sense of ISO/IEC TR 10000-1. These answer the need of identifying the protocol families co-existing within the IEC 61158 series, as a result of the international harmonization of fieldbus technologies available on the market. More specifically, these profiles help to correctly state the compliance to the IEC 61158 series, and to avoid the spreading of divergent implementations, which would limit its use, clearness and understanding. Additional profiles to address specific market concerns, such as functional safety or information security, may be addressed by future parts of this standard.

This standard contains several Communication Profile Families (CPF), which specify one or more communication profiles. Such profiles identify, in a strict sense, protocol subsets of the IEC 61158 series via protocol specific communication profiles. They do not define device-type-specific communication profiles for the purpose of guiding manufacturers in feature set selection – for example, in selecting the minimum set of communication services and protocol to implement a specific class of devices, such as generic slaves or transmitters ("implementation profiles"). Neither do they define device profiles that specify communication profiles together with application functions needed to answer the need of a specific application ("application profiles").

It is agreed that these latter classes of profiles would help the use of the IEC 61158 series of standards; the profiles defined in this document are a necessary step to achieve that task.

It is also important to clarify that interoperability – defined as the ability of two or more network systems to exchange information and to make mutual use of the information that has been exchanged (see ISO/IEC TR 10000-1) – can be directly achieved on the same link only for those devices complying to the same communication profile.

Profiles contained in this International Standard are constructed of references to IEC 61158-2 and the IEC 61158-3, IEC 61158-4, IEC 61158-5 and IEC 61158-6 series, and other IS, TS or worldwide-accepted standards, as appropriate¹. Each profile is required to reference at least one (sub)part of IEC 61158-2 through IEC 61158-6.

Two or more Profiles, which are related to a common family, are specified within a "Communication Profile Family" (CPF).

¹ International Standardised Profiles may contain normative references to specifications other than International Standards; see ISO/IEC JTC 1 N 4047: *The Normative Referencing of Specifications other than International Standards in JTC 1 International Standardized Profiles – Guidelines for ISP Submitters*.

INDUSTRIAL COMMUNICATION NETWORKS – PROFILES –

Part 1: Fieldbus profiles


1 Scope

This part of IEC 61784 defines a set of protocol specific communication profiles based primarily on the IEC 61158 series, to be used in the design of devices involved in communications in factory manufacturing and process control.

Each profile selects specifications for the communications protocol stack at a device. It contains a minimal set of required services at the application layer and specification of options in intermediate layers defined through references. If no application layer is included, then a minimal set of required services at the Data-link layer is specified. The appropriate references to the protocol specific types are given in each communication profile family or associated profiles.

NOTE All profiles are based on standards or draft standards or International Standards published by the IEC or from standards or International Standards established by other standards bodies or open standards processes.

The structure of communication profile families is specified in Figure 1.

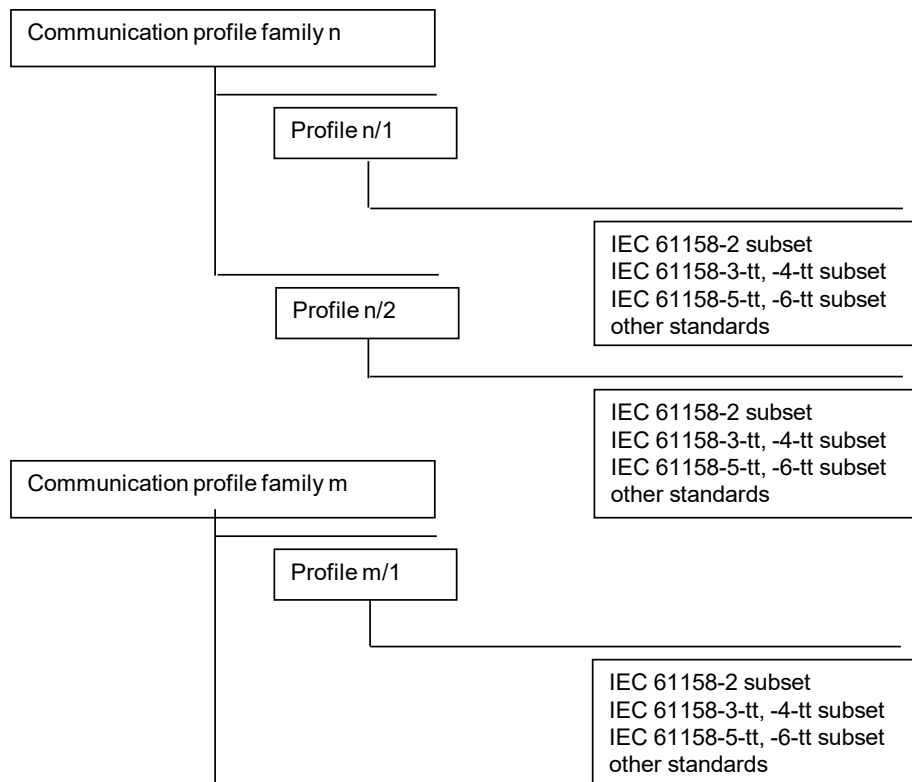

IEC

Figure 1 – Communication profile families and profiles

Each profile selects an appropriate consistent and compatible subset of services and protocols from the total available set that is defined and modelled in IEC 61158. For the selected subset of services and protocols, the profile also describes any possible or necessary constraints in parameter values.

Table 1 shows the communication profile families that are defined in this standard.

Table 1 – Relations of Communication Profile Families to type numbers

IEC 61784-1 contents			Corresponding IEC 61158 Types
CPF	Clause	Communication Profile Families (Note 1)	Type
1	5	Foundation® Fieldbus	1, 5, 9 (see Note 2)
2	6	CIP™	2
3	7	PROFIBUS & PROFINET	3 (see Note 3)
4	8	P-NET®	4
5	9	WorldFIP®	7
6	10	INTERBUS®	8
7	11	Has been removed based for lack of market relevance	6
8	12	CC-Link	18
9	13	HART	20
16	14	SERCOS	16
19	15	MECHATROLINK	24

NOTE 1 See the specific CPF clauses for information on the respective trademark holders.

NOTE 2 CP 1/1 has a denigrated PhL device profile subclass, which uses a variant of a Type 3 PhL.

NOTE 3 CP 3/2 has a denigrated PhL device profile subclass, which uses a variant of a Type 1 PhL.

NOTE 4 Other CPFs can be found in IEC 61784-2.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE All parts of the IEC 61158 series, as well as IEC 61784-1 and IEC 61784-2 are maintained simultaneously. Cross-references to these documents within the text therefore refer to the editions as dated in this list of normative references.

IEC 60079-11, *Explosive atmospheres – Part 11: Equipment protection by intrinsic safety "i"*

IEC 60079-25, *Explosive atmospheres – Part 25: Intrinsically safe electrical systems*

IEC 61010 (all parts), *Safety requirements for electrical equipment for measurement, control and laboratory use*

IEC 61131-2, *Programmable controllers – Part 2: Equipment requirements and tests*

IEC 61158 (all parts), *Industrial communication networks – Fieldbus specifications*

IEC 61158-2:2014, *Industrial communication networks – Fieldbus specifications – Part 2: Physical layer specification and service definition*

IEC 61158-3-1:2014, *Industrial communication networks – Fieldbus specifications – Part 3-1: Data-link layer service definition – Type 1 elements*

IEC 61158-3-2:2014, *Industrial communication networks – Fieldbus specifications – Part 3-2: Data-link layer service definition – Type 2 elements*

IEC 61158-3-2:2014/AMD1:2019

IEC 61158-3-3:2014, *Industrial communication networks – Fieldbus specifications – Part 3-3: Data-link layer service definition – Type 3 elements*

IEC 61158-3-4:2019, *Industrial communication networks – Fieldbus specifications – Part 3-4: Data-link layer service definition – Type 4 elements*

IEC 61158-3-7:2007, *Industrial communication networks – Fieldbus specifications – Part 3-7: Data-link layer service definition – Type 7 elements*

IEC 61158-3-8:2007, *Industrial communication networks – Fieldbus specifications – Part 3-8: Data-link layer service definition – Type 8 elements*

IEC 61158-3-16:2007, *Industrial communication networks – Fieldbus specifications – Part 3-16: Data-link layer service definition – Type 16 elements*

IEC 61158-3-18:2007, *Industrial communication networks – Fieldbus specifications – Part 3-18: Data-link layer service definition – Type 18 elements*

IEC 61158-3-19:2019, *Industrial communication networks – Fieldbus specifications – Part 3-19: Data-link layer service definition – Type 19 elements*

IEC 61158-3-20:2014, *Industrial communication networks – Fieldbus specifications – Part 3-20: Data-link layer service definition – Type 20 elements*

IEC 61158-3-24:2014, *Industrial communication networks – Fieldbus specifications – Part 3-24: Data-link layer service definition – Type 24 elements*

IEC 61158-4-1:2014, *Industrial communication networks – Fieldbus specifications – Part 4-1: Data-link layer protocol specification – Type 1 elements*

IEC 61158-4-2:2019, *Industrial communication networks – Fieldbus specifications – Part 4-2: Data-link layer protocol specification – Type 2 elements*

IEC 61158-4-3:2019, *Industrial communication networks – Fieldbus specifications – Part 4-3: Data-link layer protocol specification – Type 3 elements*

IEC 61158-4-4:2019, *Industrial communication networks – Fieldbus specifications – Part 4-4: Data-link layer protocol specification – Type 4 elements*

IEC 61158-4-7:2007, *Industrial communication networks – Fieldbus specifications – Part 4-7: Data-link layer protocol specification – Type 7 elements*

IEC 61158-4-8:2007, *Industrial communication networks – Fieldbus specifications – Part 4-8: Data-link layer protocol specification – Type 8 elements*

IEC 61158-4-16:2007, *Industrial communication networks – Fieldbus specifications – Part 4-16: Data-link layer protocol specification – Type 16 elements*

IEC 61158-4-18:2010, *Industrial communication networks – Fieldbus specifications – Part 4-18: Data-link layer protocol specification – Type 18 elements*

IEC 61158-4-19:2019, *Industrial communication networks – Fieldbus specifications – Part 4-19: Data-link layer protocol specification – Type 19 elements*

IEC 61158-4-20:2014, *Industrial communication networks – Fieldbus specifications – Part 4-20: Data-link layer protocol specification – Type 20 elements*

IEC 61158-4-24:2019, *Industrial communication networks – Fieldbus specifications – Part 4-24: Data-link layer protocol specification – Type 24 elements*

IEC 61158-5-2:2019, *Industrial communication networks – Fieldbus specifications – Part 5-2: Application layer service definition – Type 2 elements*

IEC 61158-5-3:2014, *Industrial communication networks – Fieldbus specifications – Part 5-3: Application layer service definition – Type 3 elements*

IEC 61158-5-4:2019, *Industrial communication networks – Fieldbus specifications – Part 5-4: Application layer service definition – Type 4 elements*

IEC 61158-5-5:2014, *Industrial communication networks – Fieldbus specifications – Part 5-5: Application layer service definition – Type 5 elements*

IEC 61158-5-7:2007, *Industrial communication networks – Fieldbus specifications – Part 5-7: Application layer service definition – Type 7 elements*

IEC 61158-5-8:2007, *Industrial communication networks – Fieldbus specifications – Part 5-8: Application layer service definition – Type 8 elements*

IEC 61158-5-9:2014, *Industrial communication networks – Fieldbus specifications – Part 5-9: Application layer service definition – Type 9 elements*

IEC 61158-5-16:2007, *Industrial communication networks – Fieldbus specifications – Part 5-16: Application layer service definition – Type 16 elements*

IEC 61158-5-18:2010, *Industrial communication networks – Fieldbus specifications – Part 5-18: Application layer service definition – Type 18 elements*

IEC 61158-5-19:2019, *Industrial communication networks – Fieldbus specifications – Part 5-19: Application layer service definition – Type 19 elements*

IEC 61158-5-20:2014, *Industrial communication networks – Fieldbus specifications – Part 5-20: Application layer service definition – Type 20 elements*

IEC 61158-5-24:2014, *Industrial communication networks – Fieldbus specifications – Part 5-24: Application layer service definition – Type 24 elements*

IEC 61158-6-2:2019, *Industrial communication networks – Fieldbus specifications – Part 6-2: Application layer protocol specification – Type 2 elements*

IEC 61158-6-3:2019, *Industrial communication networks – Fieldbus specifications – Part 6-3: Application layer protocol specification – Type 3 elements*

IEC 61158-6-4:2019, *Industrial communication networks – Fieldbus specifications – Part 6-4: Application layer protocol specification – Type 4 elements*

IEC 61158-6-5:2014, *Industrial communication networks – Fieldbus specifications – Part 6-5: Application layer protocol specification – Type 5 elements*

IEC 61158-6-7:2007, *Industrial communication networks – Fieldbus specifications – Part 6-7: Application layer protocol specification – Type 7 elements*

IEC 61158-6-8:2007, *Industrial communication networks – Fieldbus specifications – Part 6-8: Application layer protocol specification – Type 8 elements*

IEC 61158-6-9:2014, *Industrial communication networks – Fieldbus specifications – Part 6-9: Application layer protocol specification – Type 9 elements*

IEC 61158-6-16:2007, *Industrial communication networks – Fieldbus specifications – Part 6-16: Application layer protocol specification – Type 16 elements*

IEC 61158-6-18:2010, *Industrial communication networks – Fieldbus specifications – Part 6-18: Application layer protocol specification – Type 18 elements*

IEC 61158-6-19:2019, *Industrial communication networks – Fieldbus specifications – Part 6-19: Application layer protocol specification – Type 19 elements*

IEC 61158-6-20:2014, *Industrial communication networks – Fieldbus specifications – Part 6-20: Application layer protocol specification – Type 20 elements*

IEC 61158-6-24:2014, *Industrial communication networks – Fieldbus specifications – Part 6-24: Application layer protocol specification – Type 24 elements*

IEC 61784-2:2019, *Industrial communication networks – Profiles – Part 2: Additional fieldbus profiles for real-time networks based on ISO/IEC/IEEE 8802-3*

IEC 61784-5-2:2018, *Industrial communication networks – Profiles – Part 5-2: Installation of fieldbuses – Installation profiles for CPF 2*

IEC 61918:2018, *Industrial communication networks – Installation of communication networks in industrial premises*

IEC 62026-3, *Low-voltage switchgear and controlgear – Controller-device interfaces (CDIs) – Part 3: DeviceNet*

IEC 62591:2016, *Industrial communication networks – Wireless communication network and communication profiles – WirelessHART™*

ISO/IEC 8482, *Information technology – Telecommunications and information exchange between systems – Twisted pair multipoint interconnections*

ISO/IEC 8802-2:1998, *Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 2: Logical link control*

ISO/IEC/IEEE 8802-3:2017, *Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 3: Standard for Ethernet*

ISO/IEC 15802-3, *Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Common specifications – Part 3: Media Access Control (MAC) Bridges*

ISO 15745-3:2003, *Industrial automation systems and integration – Open systems application integration framework – Part 3: Reference description for IEC 61158-based control systems*

ANSI TIA/EIA-485-A:1998, *Electrical Characteristics of Generators and Receivers for Use in Balanced Digital Multipoint Systems*

IETF RFC 768, *User Datagram Protocol*. Available at <<http://www.ietf.org>> [viewed 2018-09-03]

IETF RFC 791, *Internet Protocol*. Available at <<http://www.ietf.org>> [viewed 2018-09-03]

IETF RFC 792, *Internet Control Message Protocol*. Available at <<http://www.ietf.org>> [viewed 2018-09-03]

IETF RFC 793, *Transmission Control Protocol*. Available at <<http://www.ietf.org>> [viewed 2018-09-03]

IETF RFC 826, *Ethernet Address Resolution Protocol*. Available at <<http://www.ietf.org>>

IETF RFC 894, *A standard for the Transmission of IP Datagrams over Ethernet Networks*. Available at <<http://www.ietf.org>> [viewed 2018-09-03]

IETF RFC 1112, *Host Extensions for IP Multicasting*. Available at <<http://www.ietf.org>>

IETF RFC 1122, *Requirements for Internet Hosts – Communication Layers*. Available at <<http://www.ietf.org>> [viewed 2018-09-03]

IETF RFC 1123, *Requirements for Internet Hosts – Application and Support*. Available at <<http://www.ietf.org>> [viewed 2018-09-03]

IETF RFC 1127, *A Perspective on the Host Requirements RFCs*. Available at <<http://www.ietf.org>> [viewed 2018-09-03]

IETF RFC 2236, *Internet Group Management Protocol, Version 2*. Available at <<http://www.ietf.org>> [viewed 2018-09-03]