

ANSI/AWWA **C301-14(R19)**

*(Revision of ANSI/AWWA C301-07)
Reaffirmed without revision 2019*

AWWA Standard

Prestressed Concrete Pressure Pipe, Steel-Cylinder Type

Effective date: Feb 1, 2020.

First edition approved by AWWA Board of Directors Nov. 21, 1949.

This edition approved Jan. 19, 2014.

Approved by American National Standards Institute Sept. 25, 2014.

Reaffirmed without revision Oct. 28, 2019.

Reaffirmation approved by American National Standards Institute Sept. 30, 2019.



American Water Works
Association




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water supply industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal - American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal - American Water Works Association* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900, or emailing info@ansi.org.

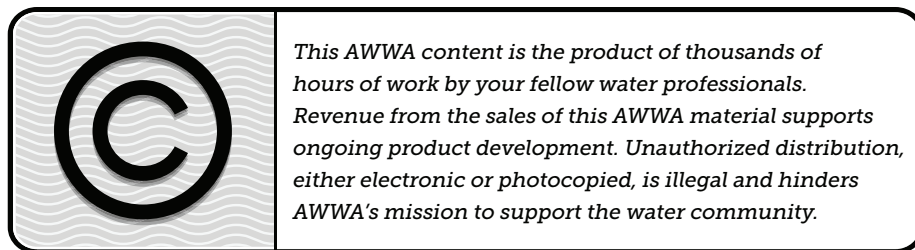

ISBN-13, print: 978-1-62576-371-6

eISBN-13, electronic: 978-1-61300-539-2

DOI: <http://dx.doi.org/10.12999/AWWA.C301.19>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2015 by American Water Works Association
Printed in USA

Committee Personnel

The AWWA Standards Committee on Concrete Pressure Pipe, which reaffirmed this standard without revision, had the following personnel at the time:

Wylie C. Duke, *Chair*

Richard I. Mueller, *Secretary*

User Members

K.A. Danley, Des Moines Water Works, Des Moines, Iowa

W.C. Duke, Bureau of Reclamation, Denver, Colo.

N.D. Faber, San Diego County Water Authority, Escondido, Calif.

J.C. Gehrig, Tarrant Regional Water District, Fort Worth, Tex.

W.C. HagenBurger, Beaver Water District, Lowell, Ark.

T. Peng, Metropolitan Water District of Southern California, Los Angeles, Calif.

V.D. Scutelnicu, Los Angeles Dept. of Water & Power, Los Angeles, Calif.

A.F. Williams, Louisville Water Company, Louisville, Ky.

General Interest Members

S.A. Arnaout, Stantec, Dallas, Tex.

H.H. Bardakjian, Consulting Engineer, Glendale, Calif.

W.R. Brunzell, Brunzell Associates Ltd., Wilmette, Ill.

B.C. Coltharp, Freese and Nichols Inc., Dallas, Tex.

D. Faber, (*liaison, nonvoting*), Standards Council Liaison, Faber & Associates, Columbus, Ohio

F.S. Kurtz, (*liaison, nonvoting*), Standards Engineer Liaison, AWWA, Denver, Colo.

A.S. Maughn, (*alternate*), Freese and Nichols Inc., Dallas, Tex.

R. Ortega, Aurora Technical Services LLC, Houston, Tex.

A. Rodriguez, HDR Engineering Inc., San Antonio, Tex.

J.J. Roller, CTLGroup, Skokie, Ill.

A.E. Romer, (*alternate*), AECOM, Orange, Calif.

R.F. Williams, AECOM, Miami, Fla.

M.S. Zarghamee, Simpson Gumpertz & Heger Inc., Waltham, Mass.

Producer Members

K.R. Baas, Thompson Pipe Group – Pressure, Hattiesburg, Miss.
G. Bizien, Forterra Pressure Pipe, St-Eustache, Que., Canada
K.M. Brown, Vianini Pipe Inc., Somerville, N.J.
M. DeFranco, (*alternate*), DECAST Ltd., Utopia, Ont., Canada
B.D. Keil, Northwest Pipe Company, Draper, Utah
R.D. Mielke, (*alternate*), Northwest Pipe Company, Raleigh, N.C.
R.I. Mueller, American Concrete Pressure Pipe Association, Hayden, Idaho
S. Theroux, (*alternate*), Forterra Pressure Pipe, St-Eustache, Que., Canada
J.A. Tully, DECAST Ltd., Utopia, Ont., Canada

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword		4.2	Drawings and Data to Be Provided by Purchaser..... 7
I	Introduction..... vii	4.3	Data to Be Submitted by Manufacturer 7
I.A	Background..... vii	4.4	Materials 8
I.B	History..... viii	4.5	Design..... 12
I.C	Acceptance..... viii	4.6	Fabrication 15
II	Special Issues..... ix	4.7	Fittings and Special Pipe 27
III	Use of This Standard ix	5	Verification
III.A	Purchaser Options and Alternatives ix	5.1	Inspection and Testing by Purchaser 30
III.B	Modification to Standard x	5.2	Tests..... 31
IV	Major Revisions..... x	5.3	Quality Assurance..... 32
V	Comments xi	6	Delivery
Standard		6.1	Marking..... 32
1	General	6.2	Transportation 32
1.1	Scope 1	6.3	Affidavit of Compliance 32
1.2	Purpose 2	Table	
1.3	Application..... 2	1	Minimum Thickness of Sheet or Plate for Fittings of Various Diameters..... 28
2	References 2		
3	Definitions 5		
4	Requirements		
4.1	Permeation 6		

This page intentionally blank.

Foreword

This foreword is for information only and is not a part of ANSI/AWWA C301.*

I. Introduction.

I.A. *Background.* There are two types of prestressed concrete steel-cylinder pipe: (1) the lined-cylinder type, with a core composed of a steel cylinder lined with concrete and subsequently wire-wrapped directly on the steel cylinder and coated with mortar; and (2) the embedded-cylinder type, with a core composed of a steel cylinder encased in concrete and subsequently wire-wrapped on the exterior concrete surface and coated with cement mortar. The lined-cylinder type, which was first used in the United States in 1942, is provided in sizes from 16 in. (410 mm) to 60 in. (1,520 mm). The embedded-cylinder type, which was developed later and first installed in 1953, is most commonly manufactured in sizes 48 in. (1,220 mm) and larger.

Both types are designed for the specific combination of internal pressure and external load required for the project in accordance with the procedures outlined in ANSI*/AWWA C304, Standard for Design of Prestressed Concrete Cylinder Pipe.

Prestressed concrete steel-cylinder pipe is used for transmission mains, distribution feeder mains, pressure siphons (including river crossings), penstocks, industrial pressure lines, water intake lines, and other applications.

In the manufacture of lined-cylinder pipe, the first step is to fabricate and hydrostatically test the steel cylinder with joint rings attached. The cylinder is then lined with concrete to form the core. The concrete is placed either centrifugally, by vertical casting, or by a radial compaction method. The concrete lining is cured and high-tensile wire is wrapped around the core directly on the steel cylinder. For a selected wire size, the tension and spacing of the wire are controlled to produce a predetermined residual compression in the core to meet design requirements. The wrapped core is then covered with a dense premixed mortar coating applied by a mechanical impact method.

In the manufacture of embedded-cylinder pipe, the cylinder and joint rings are constructed and tested in the same manner as lined-cylinder pipe. The cylinder is encased in concrete by vertical casting and mechanical vibration to form the core. After curing, the wire reinforcement is wound under tension in one or more layers around the outside of the core with embedded steel cylinder, instead of directly on

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

the cylinder. Each layer of prestressed wire is covered with a dense premixed coating applied by a mechanical impact method.

Installation of this pipe is described in AWWA Manual M9, *Concrete Pressure Pipe*.

I.B. *History.* The first edition of this standard was approved as tentative on Nov. 21, 1949. It was revised and made standard June 13, 1952. The second edition was approved as tentative June 17, 1955, and made standard June 26, 1958.

Substantial changes, including the addition of combined loading procedures, were included in the third edition, which was made standard Jan. 27, 1964. The standard was revised again on Jan. 31, 1972; June 24, 1979; Jan. 30, 1984; June 22, 1992; Jan. 24, 1999; and Jan. 21, 2007. This edition was approved by the AWWA Board of Directors on Jan. 19, 2014, and it was reaffirmed without revision on Oct. 28, 2019.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. An advisory program formerly administered by USEPA, Office of Drinking Water, discontinued on Apr. 7, 1990.
2. Specific policies of the state or local agency.
3. Two standards developed under the direction of NSF:† NSF/ANSI 60, *Drinking Water Treatment Chemicals—Health Effects*, and NSF/ANSI 61, *Drinking Water System Components—Health Effects*.
4. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,‡ and other standards considered appropriate by the state or local agency.

* Persons outside the United States should contact the appropriate authority having jurisdiction.

† NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

‡ Both publications available from National Academy of Sciences, 500 Fifth Street, N.W., Washington, DC 20001.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, "Toxicology Review and Evaluation Procedures," to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of "unregulated contaminants" are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA C301 does not address additives requirements. Thus, users of this standard should consult the appropriate state, local, or provincial agency having jurisdiction in order to

1. Determine additives requirements including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

II. Special Issues. This standard has no applicable information for this section.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* Purchasers are advised that, while this standard presents information on materials and procedures for manufacture of the pipe, it does not contain all of the engineering information needed to prepare a complete specification for a particular pipeline installation. A specific installation may require provisions more restrictive than those in the standard and most certainly will require additional design and installation features.

Reference to AWWA Manual M9, *Concrete Pressure Pipe*, should be considered as a supplement to the use of this standard, and information in the manual should not be regarded as superseding any portion of this standard. The purpose of Manual M9 is to provide information concerning some of the various subjects to be considered in, and the minimum standard of practice for, the design and installation of concrete pressure pipelines.

When purchasing pipe under the provisions of this standard, the purchaser's specifications shall include specific details, where applicable, regarding the following:

1. Standard used—that is, ANSI/AWWA C301, Prestressed Concrete Pressure Pipe, Steel-Cylinder Type, of latest revision.
2. Whether compliance with NSF/ANSI 61, Drinking Water System Components—Health Effects, is required.
3. Manner of storage and delivery, if required of the manufacturer.
4. Working pressure, surge pressure, field-test pressure, external loading conditions, and method of bedding and backfilling (Sec. 4.2.1).
5. If detailed drawings and schedules are to be submitted for review (Sec. 4.3.1 and 4.7.1).
6. If the manufacturer is not permitted to supply pipe from inventory (Sec. 4.3.1).
7. If a tabulated layout schedule will be required (Sec. 4.3.2).
8. Details of other federal, state or provincial, and local requirements (Sec. 4.4).
9. If any material or manufacturing test reports will be required (Sec. 4.4, 5.1.2, and 5.2).
10. Type of cement required, if there is a preference (Sec. 4.4.1.1).
11. If the manufacturer is not permitted to use pozzolanic materials as a cement replacement (Sec. 4.4.1.1).
12. If aggregate samples will be required (Sec. 4.4.4).
13. If the manufacturer is not permitted to use admixtures (Sec. 4.4.6).
14. If submission of manufacturer's verification of design will be required (Sec. 4.5.2.1).
15. If submission for approval of welder qualification (Sec. 4.6.2) and welding procedure specifications (Sec. 4.6.3) will be required.
16. If details of specials and fittings are to be provided by the manufacturer (Sec. 4.7.1).
17. If the purchaser desires to inspect the material, pipe, and fittings at the manufacturer's plant (Sec. 5.1.1).
18. If steel test specimens will be required (Sec. 5.2.6).
19. If an affidavit of compliance will be required (Sec. 6.3).

III.B. *Modification to Standard.* Any modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

IV. Major Revisions. Major changes made to the standard in this revision include the following:

1. The minimum yield strength requirement of steel used in the manufacture of cylinders for pipe has increased from 33,000 psi to 36,000 psi (227 MPa to 248 MPa) (Sec. 4.4.7.1).

2. In the requirements for steel bar reinforcement, the conformance standard for the 0.55 percent maximum carbon equivalency has changed from ASTM A706 to AWS D1.4 (Sec. 4.4.8.2).

3. In the material requirements for flat steel bars, the option of conformance to ASTM A575 grade M1020 has been removed (Sec. 4.4.7.4).

4. A requirement has been added that, if specified by the purchaser, the manufacturer shall submit test reports showing the physical properties of the rubber compound used in the manufacture of gaskets (Sec. 4.4.11.8).

5. A tolerance of +½ in. (+13 mm) has been added to the minimum cover requirement of mortar coating over wire (Sec. 4.5.1.5).

6. A requirement in the testing of concrete strength for the pipe core has been added that in no case shall any cylinder tested fall below 80 percent of the required strength (Sec. 4.6.5.8).

7. For placement of prestressing wire reinforcement, the required action to be taken in case of wire breakage has changed to include verification of the required tension level (Sec. 4.6.7.1).

8. Provisions for multiple layers of prestressing wire have been added, including a requirement for a smooth and even surface to minimize bridging of the prestressing wire and criteria for mortar voids and offsets to be repaired before adding subsequent wire layers (Sec. 4.6.7.2).

9. Requirements for linings and coatings for fittings have been modified extensively (Sec. 4.7.2.4).

10. Numerous editorial improvements have been made throughout the standard.

V. Comments. If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at standards@awwa.org.

This page intentionally blank.



**American Water Works
Association**

Dedicated to the World's Most Important Resource™

ANSI/AWWA C301-14(R19)
(Revision of ANSI/AWWA C301-07)
Reaffirmed without revision 2019

AWWA Standard

Prestressed Concrete Pressure Pipe, Steel-Cylinder Type

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes the manufacture of circumferentially prestressed concrete pressure pipe in diameter sizes 16 in. (410 mm) through 144 in. (3,660 mm) manufactured with a steel cylinder and wire reinforcement. Larger sizes have been manufactured based on the concepts presented in this standard. The standard describes two types of prestressed pipe: (1) lined-cylinder pipe with a core composed of a steel cylinder lined with concrete and subsequently wire-wrapped and coated with premixed cement mortar, and (2) embedded-cylinder pipe with a core composed of a steel cylinder encased in concrete and subsequently wire wrapped and coated with premixed cement mortar. The structural design of prestressed concrete pipe for internal pressure and external load is not presented in this standard but is the subject of ANSI/AWWA C304, Design of Prestressed Concrete Cylinder Pipe. ANSI/AWWA C301 also does not include requirements for handling, delivering, laying, field testing, or disinfection of pipe. See AWWA Manual M9, *Concrete Pressure Pipe*, for this information, as well as for certain supplementary design considerations related to thrust restraint, subaqueous installations, and installation in corrosive environments.