



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA B600-16
(Revision of ANSI/AWWA B600-10)

AWWA Standard

Powdered Activated Carbon

Effective date: April 1, 2016.
First edition approved by AWWA Board of Directors May 15, 1953.
This edition approved Jan. 16, 2016.
Approved by American National Standards Institute Oct. 12, 2015.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water supply industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed on the first page of the Official Notice section of *Journal – American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal – American Water Works Association* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of publication. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or emailing info@ansi.org.

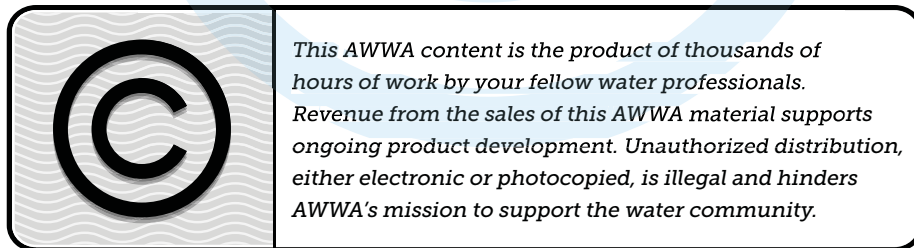

ISBN-13, print: 978-1-62576-132-3

eISBN-13, electronic: 978-1-61300-359-6

DOI: <http://dx.doi.org/10.12999/AWWA.B600.16>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2016 by American Water Works Association
Printed in USA

Committee Personnel

The AWWA Standards Committee on Activated Carbon, which reviewed and approved this standard, had the following personnel at the time of approval:

David W. Mazyck, *Chair*

General Interest Members

R.G. Bond, Black & Veatch, Kansas City, Mo.	(AWWA)
H.E. Brown,* American Water Company, Mesa, Ariz.	(AWWA)
W.B. Dowbiggin, CDM Smith, Raleigh, N.C.	(AWWA)
A. Fisher, Water Quality Association, Lisle, N.C.	(AWWA)
D.J. Hartman, Greater Cincinnati Water Works, Cincinnati, Ohio	(AWWA)
D.R. Knappe, North Carolina State University, Raleigh, N.C.	(AWWA)
D.W. Mazyck, University of Florida, Gainesville, Fla.	(AWWA)
T.J. McCandless,† Standards Engineer Liaison, AWWA, Denver, Colo.	(AWWA)
T.F. Speth, USEPA, Cincinnati, Ohio	(AWWA)
I.H. Suffet, UCLA School of Public Health, Los Angeles, Calif.	(AWWA)
R.S. Summers, University of Colorado at Boulder, Boulder, Colo.	(AWWA)
M.A. Waer, Phoenix, Ariz.	(AWWA)

Producer Members


T.M. Byrne, MWV Specially Chemicals, North Charleston, S.C.	(AWWA)
D.M. Jordan, Evoqua WT, San Francisco, Calif.	(AWWA)
T.R. Julian, Standard Carbon LLC, Dunnellon, Fla.	(AWWA)
N.E. Megonnell, Haycarb, Pittsburgh, Pa.	(AWWA)
W.F. Naylor, Biogenic Reagents, Longview, Texas	(AWWA)
R. Potwora, Oxbow Activated Carbon, Oceanside, Calif.	(AWWA)
K. Ryan, Calgon Carbon Corporation, Pittsburgh, Pa.	(AWWA)
J. Sharpe,* Standard Purification, San Francisco, Calif.	(AWWA)

* Alternate

† Liaison, nonvoting

User Members

T. Hayes, City of Phoenix, Phoenix, Ariz.	(AWWA)
J.V. Roccaro, Suffolk County Water Authority, Oakdale, N.Y.	(AWWA)
D.E. Tungate, Rivanna Water and Sewer Authority, Charlottesville, Va.	(AWWA)
B.L. Whitteberry, Greater Cincinnati Water Works, Cincinnati, Ohio	(AWWA)
N.A. Wiley, American Water, Voorhees, N.J.	(AWWA)

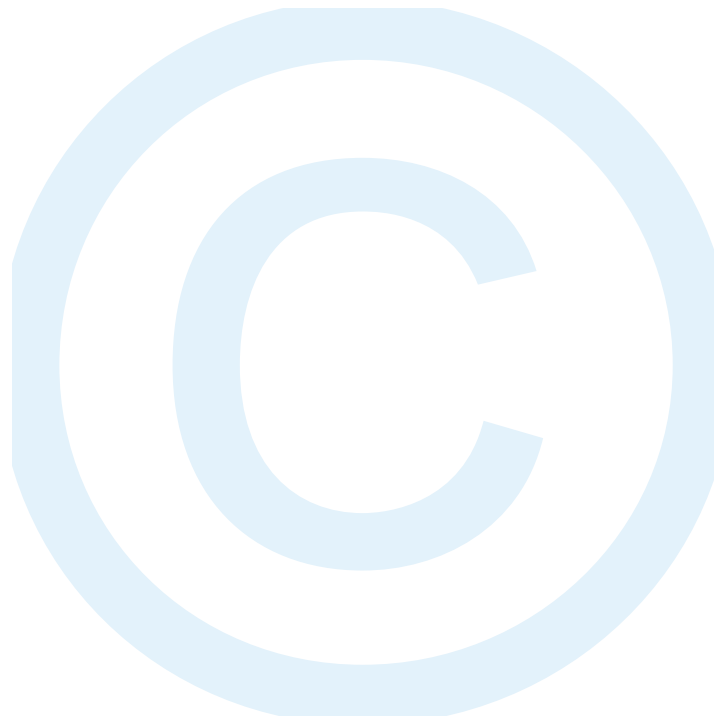


Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword			
I	Introduction.....	vii	
I.A	Background.....	vii	
I.B	History.....	vii	
I.C	Acceptance.....	viii	
II	Special Issues.....	ix	
II.A	Storage and Handling		
	Precautions.....	ix	
II.B	Activated Carbon Dust	ix	
II.C	Surrogate Tests	x	
II.D	Performance-Based Evaluation		
	Tests.....	x	
III	Use of This Standard	xi	
III.A	Purchaser Options and		
	Alternatives	xi	
III.B	Modification to Standard	xii	
IV	Major Revisions.....	xii	
V	Comments	xiii	
Standard			
1	General	1	
1.1	Scope	1	
1.2	Purpose	1	
1.3	Application.....	1	
2	References	1	
3	Definitions	2	
4	Requirements	2	
4.1	Materials	2	
4.2	Characteristics.....	3	
4.3	Chemical Requirements	3	
4.4	Impurities.....	4	
5	Verification.....	4	
5.1	Sampling.....	4	
5.2	Procedures.....	4	
5.3	Rejection	6	
6	Delivery	6	
6.1	Marking.....	6	
6.2	Packaging and Shipping.....	7	
6.3	Affidavit of Compliance	8	
Appendixes			
A	Bibliography		9
B	MIB/Geosmin, Tannin Value, and		
	Threshold Odor Tests		
B.1	MIB/Geosmin Test		11
B.2	Tannin Value Test		15
B.3	Threshold Odor Test		18
Figures			
B.1	Example of Calculation of PAC		
	Dose-Equivalent Performance		
	Factors.....		14
B.2	Sample Determination of Tannin		
	Extract by Carbon Adsorption ..		18
B.3	Parallel Threshold Dilution Chart ...		19
Tables			
B.1	Example Weighted Cost Determined		
	by Performance Factors		15
B.2	Parallel Threshold Dilution		
	Table		22

This page intentionally blank.

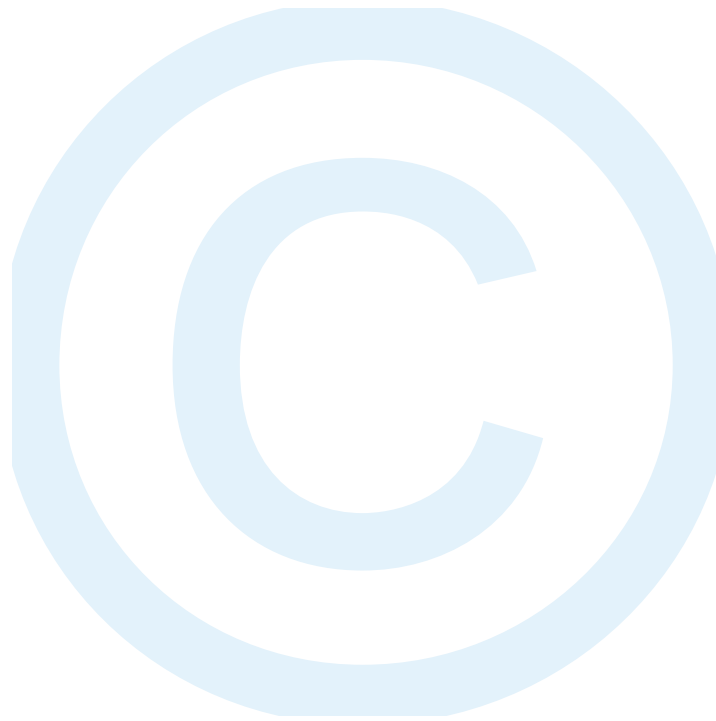

Foreword

This foreword is for information only and is not a part of ANSI/AWWA B600.*

I. Introduction.

I.A. *Background.* Activated carbon is a crude form of graphite that is produced by a carefully controlled oxidation process to develop a porous carbon structure with an internal surface area greater than 500 m²/g. This surface area gives the activated carbon the capacity to adsorb dissolved organic chemicals, many of which are taste- and odor-causing substances in water.

The major raw materials used in the manufacture of powdered activated carbon (PAC) include, but are not limited to, peat, bituminous coal, coconut shells, wood, and lignite coal. During activation, the raw materials are either reacted at high temperatures in the presence of steam or at moderate temperatures in the presence of activation chemicals. The activation process first drives off volatile components from the raw material, creating a fine porous structure, and then enlarges the pores, which creates the extensive internal pore structure required to obtain appreciable adsorption of organic chemicals. Subsequent processing may include crushing, screening, grading, and packaging.

PAC is applied by mixing it with water to form a slurry that is metered into the water at a suitable point in the treatment process. The activated carbon, along with adsorbed contaminants, is removed by settling or filtration.

I.A.1 *Source of supply.* Activated carbon used for water treatment should be obtained from manufacturers that are regularly engaged in the production of activated carbon that is found to be satisfactory for service in the water treatment field.

I.B. *History.* The first edition of ANSI/AWWA B600, Powdered Activated Carbon, was approved as tentative by the AWWA Board of Directors on July 11, 1949, and later as a standard on May 15, 1953. Subsequent revisions to ANSI/AWWA B600 were approved on Jan. 23, 1966, Jan. 28, 1978, June 17, 1990, Feb. 4, 1996, Jan. 16, 2005, and June 20, 2010. This seventh edition of B600 was approved on Jan. 16, 2016.

ANSI/AWWA B600 provides information on preparing purchase documents for the purchase of PAC to be used as an adsorption medium for the treatment of municipal

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

and industrial water supplies. Granular activated carbon is covered in ANSI/AWWA B604, Granular Activated Carbon.

This standard does not cover the design of activated carbon handling facilities or adsorption processes. Design information may be found in the *Journal - American Water Works Association* and in other publications, some of which are listed in the bibliography (appendix A) of this standard.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF*) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.[†] Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. An advisory program formerly administered by USEPA, Office of Drinking Water, discontinued on Apr. 7, 1990.
2. Specific policies of the state or local agency.
3. Two standards developed under the direction of NSF: NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.
4. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,[‡] and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

* NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

† Persons outside the United States should contact the appropriate authority having jurisdiction.

‡ Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20001.

Annex A, "Toxicology Review and Evaluation Procedures," to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of "unregulated contaminants" are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA B600 does not address additives requirements. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

II. Special Issues.

II.A. *Storage and Handling Precautions.* The following safety precautions should be exercised to minimize or eliminate hazards when handling and storing PAC. Wet activated carbon will readily adsorb oxygen from the air, creating an acute oxygen-depletion hazard in confined areas. Appropriate safety measures for oxygen-deficient atmospheres should be strictly adhered to when entering enclosed or partially enclosed areas containing activated carbon.

PAC should be stored in a building or compartment that is as fire-resistant as possible. Bags of PAC should be stacked in rows with aisles between them so that each bag may be easily removed in case of fire. Nothing else should be stored in the same building or compartment with activated carbon. Strict precautions must be taken to avoid PAC contacting strong oxidizing agents such as chlorine, sodium chlorite, hypochlorites, potassium permanganate, ozone, and peroxide. Mixing activated carbon with hydrocarbons (such as oils, gasoline, diesel fuel, grease, paint thinners, and so forth) may cause spontaneous combustion. Therefore, activated carbon must be kept separate from hydrocarbon storage or spills.

In case of an activated carbon fire, the safest procedure, if possible, is to place the smoldering material in a metal container and remove it from the building. An activated carbon fire may also be smothered by means of a very fine spray or mist of water from a hose or by a foam-type chemical extinguisher. A direct stream of water should not be used, as it will cause the smoldering particles to fly into the air and spread the fire.

II.B. *Activated Carbon Dust.* Respiratory protection shall be worn when bags of activated carbon or dry bulk material are unloaded, sampled, prepared for analysis, or otherwise handled. Excessive dusting and inhalation of activated carbon dust should

be avoided. Activated carbon dusts are classified as “nuisance particulates,” and the applicable threshold limit values (TLVs) should be followed.

Activated carbon is an electrical conductor and should not be allowed to accumulate as dust near or on open electrical circuits. Electrical outlets, lights, and motors in dry-activated-carbon feed and storage rooms should be watertight to preclude the entrance of activated carbon dust.

II.C. *Surrogate Tests.* Surrogate tests have been developed to give an indication of PAC’s general performance under specific conditions. Please note that the use of these surrogates may not model adsorption of actual water contaminants. Examples of these tests are the iodine number, tannin value, and threshold odor tests. These tests use a specific adsorbate at a high concentration to reduce the amount of test time required. These tests are of limited versatility and are not necessarily indicative of an activated carbon’s performance for a given application. Iodine number is used as an index of the acceptable surface area of a carbon and its ability to remove some types of chemical tastes and odors in addition to low-molecular-weight impurities. An iodine number of 500 mg/g is considered a minimum required value for any PAC. This value was determined by considering test performances for most of the manufactured activated carbons that are used successfully for water treatment. Tannin value is used as an index of a carbon’s ability to remove high-molecular-weight impurities such as organic compounds originating from decayed vegetation.

II.D. *Performance-Based Evaluation Tests.* Performance-based evaluation tests include the 2-methylisoborneol (MIB)/geosmin test listed in appendix B and the total organic carbon (TOC) adsorption test. The MIB/geosmin test should be completed to assist the user in choosing the most effective PAC for taste-and-odor removal and the lowest necessary dosage required to meet treatment objectives. These activated carbon tests should be completed using water from the particular plant in question. It is strongly recommended that users undertake this test, as tests will reflect the actual conditions under which the activated carbon will be used. Additional information on the MIB/geosmin test can be found in the AwwaRF research project by M. Graham, et al. (2000), *Optimization of Powdered Activated Carbon Application for Geosmin and MIB Removal*. TOC adsorption testing is being used more commonly to evaluate PAC efficiency. PAC is widely used in municipal water treatment to adsorb TOC from raw water, reducing the potential for downstream formation of disinfection by-products. Locations utilizing PAC for compliance with USEPA Disinfection and Disinfection By-Product Rule may find it useful to conduct TOC adsorption performance testing in conjunction with their PAC bids.

The threshold odor test may be used to determine an activated carbon's performance in removing tastes and odors from a particular water. The threshold odor test procedure is found in Section B.3. This test is often used to determine the optimum dosage needed to remove taste- and odor-causing substances at a particular treatment facility. Because of the subjective nature of the test and the variability in water quality at a treatment facility, the threshold odor test may be difficult to use as a reproducible indicator of activated carbon quality and performance.

The purchaser may find it advisable to modify the figure specified for a minimum iodine number or to include the tannin value, MIB/geosmin, threshold odor, or TOC adsorption tests as dictated by the relationship of these parameters to the actual treatment performance.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following items should be provided by the purchaser.

1. Standard used—that is, ANSI/AWWA B600, Powdered Activated Carbon, of latest revision.
2. Whether compliance with NSF/ANSI 61, Drinking Water System Components—Health Effects, is required.
3. When requested, a representative sample of the PAC shall be submitted to the purchaser for acceptance before shipment. The sample must be submitted in clean, vapor-proof containers, clearly marked with the address of the supplier and identified with the lot number of the contents. A duplicate sample shall be tested by the supplier, and a certified test report shall be submitted to the purchaser with the purchaser's sample, showing compliance with the requirements of the purchase documents, along with a statement certifying that the material for shipment is equal in quality to the sample submitted.
4. Name of the manufacturer whose product will be provided by the supplier.
5. The purchaser may authorize shipment on the basis of the supplier's certification of quality or may test the reference sample submitted by the supplier to confirm compliance before shipment is authorized.
6. Quantity of PAC to be purchased, in pounds (tons).
7. Details of other federal, state or provincial, and local requirements (Sec. 4.1).
8. Particle-size distribution, if other than that specified (Sec. 4.2.3).
9. Minimum iodine number, if other than that specified (Sec. 4.2.4).


10. Additional tests (Sec. 4.2.5).
11. Provisions for reaching agreement on sampling technique (Sec. 5.1).
12. The purchaser may elect to collect a representative sample of the material after delivery. The procedure used shall be in accordance with Sec. 5.1. One of the three sample portions taken may be tested to determine compliance with the purchase documents.
13. Marking (Sec. 6.1).
14. Method of packaging and shipping (Sec. 6.2).
15. If shipment is to be in bulk: type of railcar or hopper truck (Sec. 6.2.4), and whether bulk shipments are to be accompanied by weight certificates of certified weighers (Sec. 6.2.5).
16. Shipping and packing requirements (Sec. 6.2.6).
17. Whether an affidavit of compliance is required (Sec. 6.3).
18. The purchaser may elect to accept the PAC on the basis of (1) the supplier's certified test report and an accompanying affidavit of compliance (Sec. 6.3) indicating that the product proposed for use complies with this standard and with the purchase documents with no exceptions; (2) the supplier's certified test report completed by a qualified third-party testing laboratory approved by the purchaser and an accompanying affidavit of compliance; (3) the purchaser's own testing of the reference sample submitted by the supplier and the required affidavit of compliance; or (4) the purchaser's own testing of the representative sample, collected according to Sec. 5.1 after receipt of shipment, showing compliance with this standard and the purchase documents.

III.B. *Modification to Standard.* Any modification of the provisions, definitions, or terminology in this standard must be provided by the purchaser.


IV. Major Revisions. Major revisions made to the standard in this revision include the following:

1. Threshold odor test was moved from the body of the standard to appendix B, Section B.3, removing it as a requirement of the standard.
2. Sec. II.C of the foreword was revised, and Sec. II.D was added.
3. Options listed as "upon request of the purchaser" were changed to "When requested in the purchase document" to better define the option.
4. Because of the variety of tannic acids commercially available, the purchaser is now encouraged to conduct the tannin value test in-house or through a reliable third-party laboratory to ensure uniformity of tannin values for each carbon sample submitted.

V. Comments. If you have any comments or questions about this standard, please contact AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at standards@awwa.org.

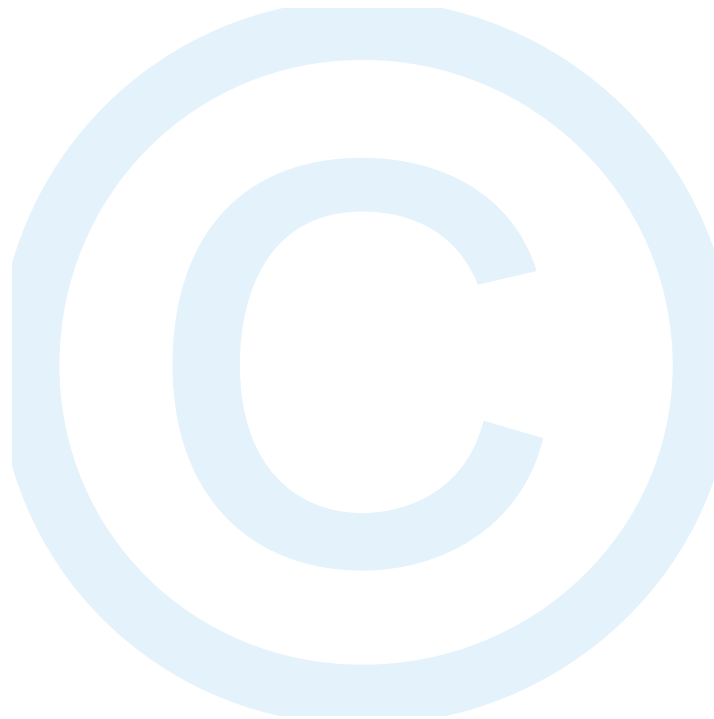

This page intentionally blank.

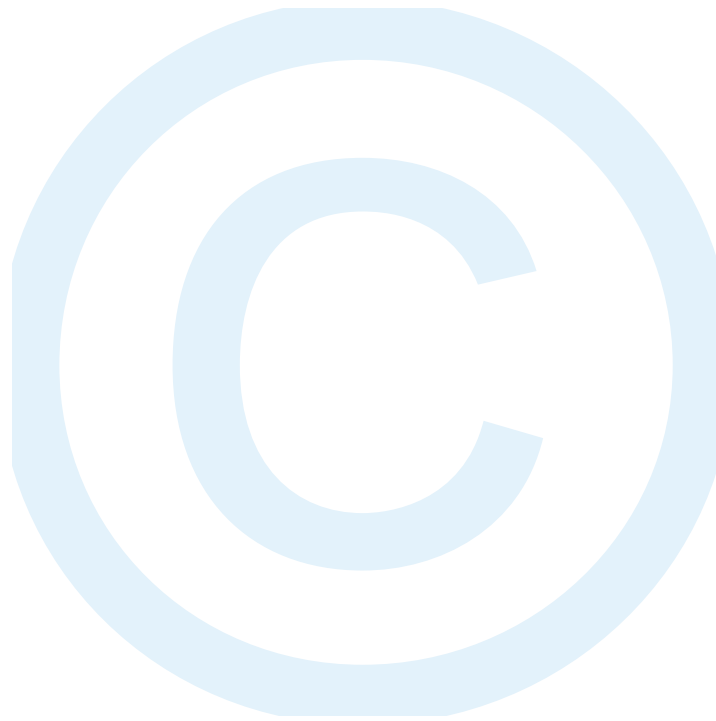



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA B600-16
(Revision of ANSI/AWWA B600-10)

AWWA Standard

Powdered Activated Carbon

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes powdered activated carbon (PAC) for use in adsorption of impurities for water supply service applications.

Sec. 1.2 Purpose

The purpose of this standard is to provide the minimum requirements for PAC, including physical, testing, packaging, and shipping requirements.

Sec. 1.3 Application

This standard can be referenced in documents for purchasing and receiving PAC and can be used as a guide for testing the physical properties of PAC samples. The stipulations of this standard apply when this document has been referenced and then only to virgin (not reactivated) PAC used in water supply service applications.

SECTION 2: REFERENCES

This standard references the following documents. In their latest editions, they form a part of this standard to the extent specified within the standard. In any case of conflict, the requirements of this standard shall prevail.