



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA C200-17
(Revision of ANSI/AWWA C200-12)

AWWA Standard

Steel Water Pipe, 6 In. (150 mm) and Larger

Effective date: August 1, 2017.

First edition approved by AWWA Board of Directors June 26, 1975.

This edition approved Jan. 14, 2017

Approved by American National Standards Institute Feb. 23, 2017.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed on the first page of the Official Notice section of *Journal – American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal – American Water Works Association* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of publication. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or emailing info@ansi.org.

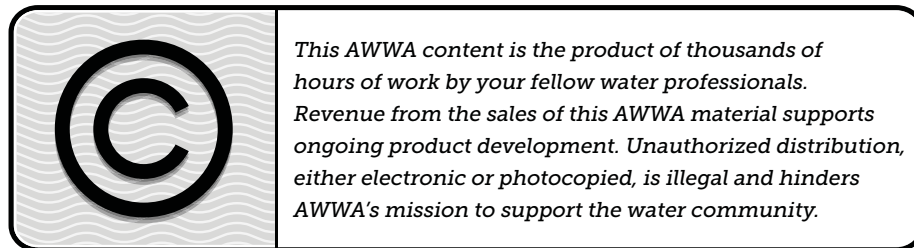

ISBN-13, print: 978-1-58321-906-5

eISBN-13, electronic: 978-1-61300-201-8

DOI: <http://dx.doi.org/10.12999/AWWA.C200.17>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2017 by American Water Works Association
Printed in USA

Committee Personnel

The Steel Water Pipe Manufacturer's Technical Advisory Committee (SWPMTAC) Task Group on AWWA C200, which reviewed and revised this standard, had the following personnel at the time:

Brent Keil, *Chair*

John Luka, *Vice-Chair*

S.A. Arnaout, Forterra Pressure Pipe Inc., Grand Prairie, Texas	(AWWA)
H.H. Bardakjian, Manufacturing Consultant, Glendale, Calif.	(AWWA)
R.J. Card, Manufacturing Consultant, Sugar Hill, Ga.	(AWWA)
K. Couture, American SpiralWeld Pipe Company, Columbia, S.C.	(AWWA)
G.A. Davidenko, Northwest Pipe Company, Saginaw, Texas	(AWWA)
D. Dechant, Consultant, Aurora, Colo.	(AWWA)
V. DeGrande, Ameron International, Rancho Cucamonga, Calif.	(AWWA)
B.D. Keil, Northwest Pipe Company, Draper, Utah	(AWWA)
J.L. Luka, American SpiralWeld Pipe Company, Columbia, S.C.	(AWWA)
R.D. Mielke, Northwest Pipe Company, Raleigh, N.C.	(AWWA)
J. Olmos, Ameron International, Rancho Cucamonga, Calif.	(AWWA)
R.N. Satyarthi, Baker Coupling Company Inc., Los Angeles, Calif.	(AWWA)
C. Shelley, Victaulic, Atlanta, Ga.	(AWWA)
B.P. Simpson, American SpiralWeld Pipe Company, Columbia, S.C.	(AWWA)
N. Williams, National Welding Corporation, Midvale, Utah	(AWWA)

The AWWA Standards Committee on Steel Pipe, which reviewed and approved this standard, had the following personnel at the time of approval:

John H. Bambei Jr., *Chair*

Dennis Dechant, *Vice-Chair*

John L. Luka, *Secretary*

General Interest Members

J.H. Bambei Jr., Bambei Engineering Services, Arvada, Colo.	(AWWA)
W.R. Brunzell, Brunzell Associates Ltd., Skokie, Ill.	(AWWA)
R.J. Card, Lockwood Andrews & Newnam, Sugar Hill, Ga.	(AWWA)
R.L. Coffey, HDR Engineering Inc., Omaha, Neb.	(AWWA)

S.N. Foellmi, Black & Veatch Corporation, Irvine, Calif.	(AWWA)
R.L. Gibson, Freese and Nichols Inc., Fort Worth, Texas	(AWWA)
M.D. Gossett,* HDR, Denver, Colo.	(AWWA)
M.B. Horsley,* Horsley Engineering LLC, Overland Park, Kan.	(AWWA)
R. Issa,* AECOM, McKinney, Texas	(AWWA)
R.A. Kufaas, Norske Corrosion & Inspection Services Ltd., Surrey, B.C., Canada	(AWWA)
J.L. Mattson, Corrosion Control Technologies, Sandy, Utah	(AWWA)
R. Ortega,* Consultant, Spring, Texas	(AWWA)
E.S. Ralph,† Standards Engineer Liaison, AWWA, Denver, Colo.	(AWWA)
A.E. Romer, AECOM, Orange, Calif.	(AWWA)
J.R. Snow, MWH Americas Inc., Denver, Colo.	(AWWA)
W.R. Whidden, Woolpert, Winter Park, Fla.	(AWWA)

Producer Members

D.W. Angell,† Standards Council Liaison, American Flow Control, Birmingham, Ala.	(AWWA)
S.A. Arnaout, Forterra Pressure Pipe, Grand Prairie, Texas	(AWWA)
H.H. Bardakjian, Consultant, Glendale, Calif.	(AWWA)
D. Dechant, Dechant Infrastructure Service, Aurora, Colo.	(AWWA)
V. DeGrande,* Ameron International, Rancho Cucamonga, Calif.	(AWWA)
W.B. Geyer, Steel Plate Fabricators Association, Lake Zurich, Ill.	(SPFA)
B.D. Keil, Northwest Pipe Company, Draper, Utah	(AWWA)
J.L. Luka, American SpiralWeld Pipe Company, Columbia, S.C.	(AWWA)
R. Mielke,* Northwest Pipe Company, Raleigh, N.C.	(AWWA)
J. Olmos, Ameron International, Rancho Cucamonga, Calif.	(AWWA)
G.F. Ruchti,* Consultant, Punta Gorda, Fla.	(AWWA)
B.P. Simpson,* American Cast Iron Pipe Company, Birmingham, Ala.	(AWWA)
C.C. Sundberg, Victaulic, Issaquah, Wash.	(AWWA)
D. Walker, Avid Protective Products LTD/Tnemec Company, Oakville, Ont., Canada	(AWWA)
J.A. Wise, Canus International Sales Inc., Surrey, B.C., Canada	(AWWA)

* Alternate

† Liaison, non-voting

User Members

L. Adams, US Bureau of Reclamation, Denver, Colo.	(AWWA)
G.A. Andersen, New York City Bureau of Water Supply, Little Neck, N.Y.	(AWWA)
B. Cheng, Metro Vancouver, Vancouver, B.C., Canada	(AWWA)
M.E. Conner, San Diego County Water Authority, San Diego, Calif.	(AWWA)
S. Hattan, Tarrant Regional Water District, Fort Worth, Texas	(AWWA)
T.J. Jordan,* Metropolitan Water District of Southern California, La Verne, Calif.	(AWWA)
P.K. Karna, Tacoma Water, Tacoma, Wash.	(AWWA)
M. McReynolds,* Metropolitan Water District of Southern California, Oak Park, Calif.	(AWWA)
K.R. Parbhoo, Los Angeles Department of Water and Power, Los Angeles, Calif.	(AWWA)
M. Turney,* Denver Water, Denver, Colo.	(AWWA)

* Alternate

This page intentionally blank.

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword			
I	Introduction.....	ix	
I.A	Background.....	ix	
I.B	History.....	ix	
I.C	Acceptance.....	x	
II	Special Issues.....	xi	
II.A	Advisory Information on Product Application.....	xi	
II.B	Chlorine and Chloramine Degradation of Elastomers	xii	
III	Use of This Standard.....	xiii	
III.A	Purchaser Options and Alternatives	xiii	
III.B	Modification to Standard	xiv	
IV	Major Revisions.....	xiv	
V	Comments	xiv	
Standard			
1 General			
1.1	Scope	1	
1.2	Purpose	1	
1.3	Application.....	1	
2 References 2			
3 Definitions 4			
4 Requirements			
4.1	Permeation	7	
4.2	Materials	8	
4.3	Drawings.....	8	
4.4	Calculations	8	
4.5	Selection of Materials	8	
4.6	Requirements for Welding Qualification	11	
4.7	Fabrication of Pipe	11	
4.8	Production Weld Tests	15	
4.9	Permissible Variations in Dimensions	19	
4.10	Ancillary Pipe.....	19	
4.11	Preparation of Ends.....	20	
4.12	Protective Coatings and Linings.....	24	
4.13	Special Sections	25	
4.14	Fabrication of Special Sections	25	
5 Verification			
5.1	Inspection	25	
5.2	Test Procedures	26	
5.3	Calibration of Equipment.....	28	
5.4	Test Reports	29	
6 Delivery			
6.1	Marking.....	29	
6.2	Handling and Loading.....	29	
6.3	Affidavit of Compliance	29	
Figures			
1	Charpy Test Evaluation	10	
2	Repair Method by Offset Value and Wall Thickness	12	
3	Bridge Cam Gauge.....	13	

SEC.		PAGE	SEC.		PAGE
4	Reduced-Section Tension Test Specimen.....	15	<i>Tables</i>		
5	Guided-Bend Test Specimen	16	1	Steel Plate, Sheet, or Coils for Fabricated Pipe.....	9
6	Jig for Guided-Bend Test.....	16	2	Repair Requirements Based On Offset Value and Wall Thickness	13
7	Alternative Guided-Bend Wraparound Jig.....	17	3	Guided-Bend Test Jig Dimensions	17
8	Alternative Guided-Bend Roller Jig	18			

Foreword

*This foreword is for information only and is not a part of ANSI*AWWA C200.*

I. Introduction.

I.A. *Background.* This standard covers butt-joint welded straight-seam or spiral-seam steel pipe, 6 in. (150 mm) and larger, for transmission and distribution of water, including fabrication of pipe, requirements of welding operations, permissible variations of thickness and dimensions, preparation of ends, fabrication of special sections, inspection, and test procedures.

I.B. *History.* The first AWWA steel pipe standards issued were 7A.3 and 7A.4, published in 1940. Standard 7A.4 pertained to steel pipe smaller than 30 in. (750 mm) in diameter, and 7A.3 pertained to steel pipe 30 in. (750 mm) in diameter and larger. Subsequently, in recognition that some pipe used in water utility service was manufactured in steel mills rather than in a fabricator's shop, two new AWWA standards were issued in 1960. AWWA C201 replaced 7A.3 and pertained to all pipe, regardless of diameter, manufactured in a fabricator's shop from steel sheet or plate. The physical and chemical properties are properties of the sheet or plate from which the pipe is made. The properties are a function of the steel mill practice and are not affected significantly by fabricating procedures. AWWA C202 replaced 7A.4 and pertained to mill pipe, which is normally produced in a production pipe mill. The specified physical and chemical properties are those of the completed pipe. Physical testing is performed on the pipe rather than on the steel from which it originates. In many cases, the physical properties are significantly affected by the pipe-manufacturing procedure. AWWA C201 was revised in 1966, and AWWA C202 was revised in 1964. Both AWWA C201 and AWWA C202 were superseded by AWWA C200-75, approved by the AWWA Board of Directors on Jan. 26, 1975.

AWWA C200 includes all types and classes of steel pipe, 6 in. (150 mm) in diameter and larger, used in water utility service, regardless of the pipe-manufacturing source. With adequate quality assurance, pipe manufactured in a fabricator's shop or in a steel pipe mill is suitable for water utility service.

By reference, AWWA C202 (which pertained to mill-type steel water pipe) included API[†] 5L and API 5LX pipe grades manufactured to API standards for high-pressure

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

† American Petroleum Institute, 1220 L Street, NW, Washington, DC 20005.

applications. With the inclusion of ASTM A570/A570M and ASTM A572/A572M high-strength steels in AWWA C200-75, API high-pressure pipe was omitted from AWWA C200-75 as being redundant. API 5L and API 5LX pipe grades fully met all requirements of AWWA C200 and could be used for water utility applications if dictated by availability or other economic considerations.

AWWA C200-75 introduced design criteria for determination of wall thickness to meet internal pressure conditions. These criteria facilitated the selection of the optimum combination of thickness and material for steel pipe.

Revisions in AWWA C200-86 included clarification of forming for lap-joint ends and gasketed ends and testing of O-ring gaskets. Subsequent editions of this standard were approved by the AWWA Board of Directors on June 23, 1991; Feb. 2, 1997; June 12, 2005, and June 10, 2012. This edition was approved on Jan. 14, 2017.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.
2. Two standards developed under the direction of NSF:† NSF/ANSI 60, *Drinking Water Treatment Chemicals—Health Effects*, and NSF/ANSI 61, *Drinking Water System Components—Health Effects*.
3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,‡ and other standards considered appropriate by the state or local agency.

* Persons outside the United States should contact the appropriate authority having jurisdiction.

† NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

‡ Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20001.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, "Toxicology Review and Evaluation Procedures," to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of "unregulated contaminants" are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA C200 does not address additives requirements. Thus, users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

II. Special Issues.

II.A. Advisory Information on Product Application.

1. Basis of design. ANSI/AWWA C200 pertains to the manufacture and testing of the steel-pipe cylinder. Coatings that protect against corrosion are referenced in Sec. 4.12. ANSI/AWWA C604, Installation of Buried Steel Water Pipe, 4 In. (100 mm) and Larger, provides field installation guidelines. Overall design of steel pipelines is described in AWWA Manual M11, *Steel Water Pipe—A Guide for Design and Installation*.

Design of the wall thickness of steel pipe is primarily affected by internal pressure, including working, transient, and test pressures. Other factors that may influence the designed wall thickness are external loads, including trench loading and earth fill; special physical loading, such as continuous-beam loading with saddle supports or ring girders; vacuum conditions; type of joint used; and practical considerations for handling, shipping, lining, and coating or similar operations.

The design techniques described in AWWA Manual M11 are used to determine required wall thicknesses of steel pipe. The purchaser may establish and specify a wall thickness determined to be satisfactory for all conditions, including internal pressure, trench loadings, special physical loadings, and handling. Selection of design stresses and deflection limits should be made with regard to the properties of the lining and coating materials used. The purchaser may alternatively specify the performance criteria for the

pipeline, in which case the manufacturer, using AWWA standards, provides the wall-thickness calculations for purchaser acceptance. Performance criteria provided should include internal design pressures, external loading, and any other special conditions. The manufacturer is allowed to select materials and manufacturing processes within the limitations of this standard to produce pipe to the wall thickness required to additionally satisfy the specified performance criteria. This thickness should govern if it is greater than the wall thickness specified by the purchaser. Thickness tolerances for pipe are governed by the requirements of this standard.

2. Application. This standard describes the requirements for steel water pipe for use in water transmission and distribution under normal circumstances. It is the responsibility of the purchaser for each project to determine if any unusual circumstances related to the project require additional provisions that are not included in the standard. Such special conditions might affect design, manufacture, quality control, corrosion protection, or handling requirements.

3. Brittle fracture precautions. Sec. 4.5.2 provides test requirements for steel to ensure notch toughness. Under certain conditions where a restrained pipeline with welded lap joints will be used, notch toughness verification may be necessary, see also ANSI/AWWA C206, Field Welding of Steel Water Pipe.

4. Testing of special sections. Sec. 5.2.2 provides for nondestructive testing of the weld seams of special sections. This testing should be adequate for normal conditions previously discussed under Item 2, Application (above).

5. Roundness of pipe. The roundness of pipe during handling, shipping, joint makeup, and backfilling should be covered in the purchaser's documents. When requested, the pipe is delivered with internal bracing for shipping and handling purposes. Although not generally designed for such, this bracing can assist in limiting the maximum vertical deflection of the pipe during installation and backfilling operations. Bracing design for this purpose is the responsibility of the constructor.

II.B. *Chlorine and Chloramine Degradation of Elastomers.* The selection of materials is critical for water service and distribution piping in locations where there is a possibility that elastomers will be in contact with chlorine or chloramines. Documented research has shown that elastomers such as gaskets, seals, valve seats, and encapsulations may be degraded when exposed to chlorine or chloramines. The impact of degradation is a function of the type of elastomeric material, chemical concentration, contact surface area, elastomer cross section, and environmental conditions as well as temperature. Careful selection of and specifications for elastomeric materials and the specifics of their application for each water system component should be considered to provide long-term

usefulness and minimum degradation (swelling, loss of elasticity, or softening) of the elastomer specified.

II.B.1 Gasket Degradation Study. A pipe gasket, having the hardness of a compressed elastomer with a large mass relative to the small exposed surface area, thus experiences minimal degradation. This was validated in a research paper reported in the *Journal - AWWA*,* where the pipe gasket degradation in a 110 mg/L chloramine solution was found to degrade just the exposed surface.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following information should be provided by the purchaser.

1. Standard used—that is, ANSI/AWWA C200, Steel Water Pipe, 6 In. (150 mm) and Larger, of latest revision.
2. Whether compliance with NSF/ANSI 61, Drinking Water Treatment Components—Health Effects, is required.
3. A description or drawings indicating the diameter and total quantity of pipe required for each diameter.
4. Internal design pressure(s) (AWWA Manual M11).
5. External design pressures and other special physical loadings (AWWA Manual M11).
6. Permeation requirements (Sec. 4.1).
7. Details of other federal, state or provincial, and local requirements (Sec. 4.2).
8. The drawings and calculations to be provided by the manufacturer if required (Sec. 4.3 and 4.4).
9. Protective coating or lining if applicable (Sec. 4.12).
10. Minimum service temperature for toughness requirements (Sec. 4.5.2).
11. Specification of steel if there is a preference (Sec. 4.5).
12. Wall thickness (Sec. 4.5.3).
13. Qualification code for automatic welding (Sec. 4.6.2.1).
14. Qualification code for manual welding (Sec. 4.6.3.1).
15. Length of pipe sections, random or specified lengths (Sec. 4.9.4).
16. Type of pipe ends (description or drawings) (Sec. 4.11).

* R.W. Bonds. 2004. Effect of Chloramines on Ductile-Iron Pipe Gaskets of Various Elastomer Compounds. *Jour. AWWA*, 96(4):153–160.

17. Requirements for reports of tests of rubber-gasket materials (Sec. 4.11.6.3).
18. All special sections, indicating for each component part the dimensions or standard designation (Sec. 4.13).
19. Instructions regarding inspection at place of manufacture (Sec. 5.1).
20. Method, acceptance criteria, location, and frequency of nondestructive testing to be used for special sections (Sec. 5.2.2.1).
21. Test reports if required (Sec. 5.4).
22. Requirements for marking, line diagrams, or laying schedules (Sec. 6.1).
23. Special handling requirements and allowable out-of-roundness (Sec. 6.2).
24. Affidavit of compliance if required (Sec. 6.3).

III.B. *Modification to Standard.* Any modification of the provisions, definitions, or terminology in this standard must be provided by the purchaser.

IV. Major Revisions. Major revisions made to the standard in this edition include the following:

1. The order that a few of the sections appear was rearranged to provide a better flow to the standard and the section numbers were revised.
2. An advisory statement was added in the foreword (Sec. II.B) regarding chlorine and chloramine degradation of elastomers.
3. In Section 3, the definition for *coupon* was deleted since it does not agree with the use in the standard, the definition for *internal design pressure* was deleted since it is defined in AWWA Manual M11, and the definition for *order to chemistry* was deleted since this section was deleted from the standard.
4. The Charpy Impact Testing section (Sec. 4.5.2) was revised.
5. The Thickness of Pipe Wall section (Sec. 4.5.3) was revised.
6. Sec. 4.7.1, Weld Seams, was revised to include weld seams for special sections be CJP (complete joint penetration) welded butt joints.
7. The section Orders to Chemistry Only was deleted since this practice is no longer used (old Sec. 4.7.3).
8. The maximum interval for frequency of production weld tests was changed from feet of pipe to lineal feet of weld to reflect standard industry practice (Sec. 4.8.6).
9. The thickness and tolerance determination in Sec. 4.9.1 was further clarified.
10. Sec. 4.14, Fabrication of Special Sections, was revised for clarity.

V. Comments. If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at standards@awwa.org.



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA C200-17
(Revision of ANSI/AWWA C200-12)

AWWA Standard

Steel Water Pipe, 6 In. (150 mm) and Larger

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes electrically butt-joint-welded straight-seam or spiral-seam pipe and seamless pipe, 6 in. (150 mm)* in nominal diameter and larger, for the transmission and distribution of water or for use in other water system facilities.

Sec. 1.2 Purpose

The purpose of this standard is to provide the minimum requirements for steel water pipe, 6 in. (150 mm) and larger, including materials and quality of work, fabrication, and testing of pipe and special sections.

Sec. 1.3 Application

This standard can be referenced in the purchaser's documents for steel water pipe, 6 in. (150 mm) and larger. The stipulations of this standard apply when this document has been referenced and then only to steel water pipe, 6 in. (150 mm) and larger.

* Metric conversions given in this standard are direct conversions of US customary units and are not those specified in the International Organization for Standardization (ISO) standards.