



**American Water Works
Association**

Dedicated to the World's Most Important Resource™

ANSI/AWWA C228-14
(Revision of ANSI/AWWA C228-08)

AWWA Standard

Stainless-Steel Pipe Flange Joints for Water Service— Sizes 2 In. Through 72 In. (50 mm Through 1,800 mm)

Effective date: Nov. 1, 2014.

First edition approved by AWWA Board of Directors Jan. 27, 2008.

This edition approved June 8, 2014.

Approved by American National Standards Institute July 8, 2014.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water supply industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal - American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal - American Water Works Association* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900, or emailing info@ansi.org.

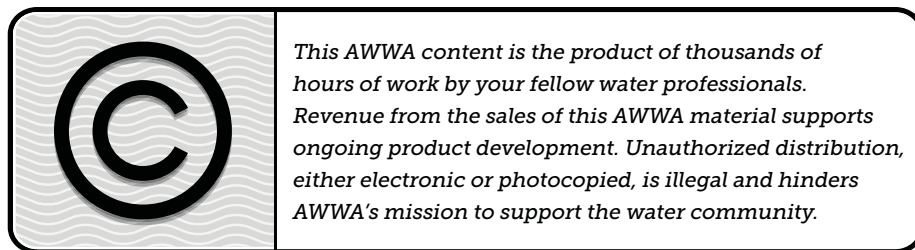

ISBN-13, print: 978-1-62576-004-9

eISBN-13, electronic: 978-1-61300-308-4

DOI: <http://dx.doi.org/10.12999/AWWA.c228.14>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2014 by American Water Works Association
Printed in USA

Committee Personnel

The Steel Water Pipe Manufacturers Technical Advisory Committee (SWPMTAC) Task Group on ANSI/AWWA C228, which reviewed and revised this standard, had the following personnel at the time:

Mike Vanderbosch, *Chair*

D. Acquistapace, Pacific Coast Flange, Mount House, Nev.	(AWWA)
E.A. Bird, Smith Blair Inc., Texarkana, Texas	(AWWA)
S. Bradberry, Ford Meter Box, Pell City, Ala.	(AWWA)
D. Brewer, Robar Industries Ltd., Surrey B.C., Canada	(AWWA)
A. Collins, JCM Industries, Nash, Texas	(AWWA)
T. Crail, Straub Coupling, National City, Calif.	(AWWA)
John Crandall, Garlock, Palmyra, N.Y.	(AWWA)
M. Fite, Pacific Coast Flange, Mound House, Nev.	(AWWA)
Harold Mosley, Mueller Company, Cleveland, Tenn.	(AWWA)
S. Lamb, SPLASH, Hoschton, Ga.	(AWWA)
C. Littlebrant, Cascade Waterworks, Yourkville, Ill.	(AWWA)
Jonathan Reinheimer, Robar Industries Ltd., Surrey, B.C., Canada	(AWWA)
Donny Seals, JCM Industries, Nash, Texas	(AWWA)
N.S. Thogersen, Romac Industries Inc., Bothell, Wash.	(AWWA)
M.A. Vanderbosch, CAB Inc., Nacogdoches Texas	

The AWWA Standards Committee on Stainless-Steel Pipe, which reviewed and approved this standard, had the following personnel at the time of approval:

J. Warren Green, *Chair*

Mike Quinnell, *Secretary*

General Interest Members

R.J. Card,* Lockwood, Andrews & Newnam Inc., Sugar Hill, Ga.	(AWWA)
J.W. Green, Lockwood, Andrews & Newnam Inc., Naperville, Ill.	(AWWA)
J.K. Jeyapalan, Consultant, New Milford, Conn.	(AWWA)
J.E. Koch, HDR Engineering Inc., Burlington, Wash.	(AWWA)

* Alternate

D. Mason,* Standards Council Liaison, Holden, Mo.	(AWWA)
C.A. Prein, Prein & Newhof, Grand Rapids, Mich.	(AWWA)
E.S. Ralph,* Standards Engineer Liaison, AWWA, Denver, Colo.	(AWWA)
R.M. Schwecke,† HDR Engineering Inc., Phoenix, Ariz.	(AWWA)
C.C. Sundberg, CH2M HILL, Issaquah, Wash.	(AWWA)

Producer Members

D. Brewer, Robar Ind. Inc., Surrey, B.C., Canada	(AWWA)
A. Collins, JCM Industries, Nash, Texas	(AWWA)
D. Dechant, Dechant Infrastructure Service, Aurora, Colo.	(AWWA)
B.D. Keil, Northwest Pipe Company, Pleasant Grove, Utah	(AWWA)
S. Lamb, Nickel Institute, Huntington, W. Va.	(AWWA)
R.D. Mielke,† Northwest Pipe Company, Raleigh, N.C.	(AWWA)
C.P. Shelley, Victaulic Co., Atlanta, Ga.	(AWWA)

User Members

M. Garcia, Denver Water, Denver, Colo.	(AWWA)
J.E. Holzapfel, City of Naperville, Naperville, Ill.	(AWWA)
D.J. Martin, Ashwaubenon Water and Sewer Authority, Ashwaubenon, Wis.	(AWWA)
J.F. O'Brien, Genesee County Water & Waste Service, Flint, Mich.	(AWWA)
B.R. Osborne, Clark County Water Reclamation District, Las Vegas, Nev.	(AWWA)
B. Powell, Green Bay Water Utility, Green Bay, Wis.	(AWWA)
M. Quinnell, Saginaw-Midland Municipal Water Supply Corporation, Bay City, Mich.	(AWWA)
R. Wagner, Dallas Water Utilities, Dallas, Texas	(AWWA)

* Liaison, nonvoting

† Alternate

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword		5 Verification	
I	vii	5.1	14
I.A	vii	5.2	14
I.B	vii	6 Delivery	
I.C	ix	6.1	14
II	xi	6.2	15
III	xi	Figures	
III.A	xi	1	13
	xi	2	13
III.B	xi	Tables	
IV	xi	1	6
V	xii	2	8
Standard		3	10
1 General		4	12
1.1	1		
1.2	1		
1.3	1		
2 References			
3 Definitions			
4 Requirements			
4.1	4		
4.2	7		
4.3	11		

This page intentionally blank.

Foreword

This foreword is for information only and is not a part of ANSI/AWWA C228.*

I. Introduction.

I.A. *Background.* Stainless steel is a standard material used to construct piping and flanges. It offers very low corrosion rates, which makes it suitable for the handling of potable water while maintaining purity and quality.

I.B. *History.* In 1945, at the request of the American Society of Mechanical Engineers (ASME), a committee having representatives from both ASME and AWWA was formed. The ASME/AWWA committee was charged with establishing standards for steel flanges having dimensions and pressure ratings commensurate with the pressures commonly used in water service. The standards were necessary because the lowest pressure ratings for steel flanges at that time were those having cold-water pressure ratings of 275 psi (1,896 kPa) (ASME[†] B16.5, Pipe Flanges and Flanged Fittings) or 150-psi (1,034-kPa) primary pressure ratings. The ratings were far higher than those ordinarily needed for water service.

Generally accepted practice for the design of bolted flange connections considers all fields of usage and a wide range of pressure and temperature applications. In waterworks practice, it is not necessary, within the scope of this standard, to deal with temperatures greater than the atmospheric range, and it is possible to limit the scope of consideration to gaskets contained in this standard and to flanges that are flat-faced. The designs were prepared in conformity with these limitations for carbon steel and first adopted in 1952. In 1999, AWWA developed a new standard for stainless-steel pipe, which then required a new standard for stainless-steel flanges.

In 1999, the AWWA Standards Council directed the Standards Committee on Steel Pipe to develop a standard for stainless-steel flanges used in water treatment and conveying facilities. In 2003, the Standards Council approved the formation of the Standards Committee on Stainless-Steel Pipe, which assumed responsibility for the development of this standard. The first edition of this standard was approved by the AWWA Board of Directors on Jan. 27, 2008. This edition was approved on July 8, 2014.

The original ASME/AWWA committee gave careful consideration to the following: (1) the effect of new standards on existing equipment; (2) the fact that cast valves

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

† ASME International, Three Park Avenue, New York, NY 10016.

and fittings will always have flanges of large outside diameter, which cannot be reduced because of the wall thickness of this equipment; (3) the need for interchangeability of equipment through the use of common drilling patterns; and (4) the fact that standards could be based on the successful usage and good service records of existing installations.

A survey of water utility users indicated that it was desirable to maintain the outside diameter and drilling of flanged fittings and valves given in ANSI/AWWA C500, Gate Valves for Water and Sewage Systems, and ANSI/AWWA B16.1, Cast Iron Pipe Flanges and Flanged Fittings (for classes 25, 125, 250, and 800). The committee decided to follow this practice for sizes 6 in. through 48 in. (150 mm through 1,200 mm).

In its extensive deliberations, the ASME/AWWA committee had available the results of special research and testing conducted by Armco Steel Corporation, Bethlehem Steel Company, and Taylor Forge and Pipe Works. The various design methods and test results were given in *Steel Ring Flanges for Steel Pipe, ARMCO Bulletin 47A* (1947), from the American Rolling Mill Company, Middletown, Ohio. The design of flanges for waterworks service, with the results of the preceding report, was published in *Journal - AWWA* in October 1950, pp. 931–944. A discussion in the paper by Taylor Forge, participants in the ASME/AWWA committee, stated the reasons why a waterworks flange is not an ASME/Taylor Forge flange. Concern about high secondary stresses at the attachment, e.g., thick material to thin wall pipe, was covered there along with the published “Design of Wye Branches” (*Journal - AWWA*, June 1955, appendix C, pp. 581–630).

Beginning in 2006 a special flange task group investigated development history of the flange dimensions found within the standard. After five years of research the task group reached the following conclusions.

1. There is no one exact stress-based design method that could reproduce the thickness values in the standard tables. However, it appears that the ring flange thicknesses in this standard are based on using the LaTour-Barnard design procedure (ARMCO Bulletin 47A, 1947) for ring flanges, which is based on ASME integral flange design procedures.

2. A current design analysis was performed based on the LaTour-Barnard proposed design method (which was based on physical tests on pipes with steel ring flanges) that demonstrated comparable results. It is worthwhile to mention that the original LaTour-Barnard design procedure was a bending stress design methodology.

3. It has been established that flange thickness design based solely on a stress-based design procedure is incorrect. In R. Barnard’s October 1950 *Journal - AWWA*

article he wrote: “When the test results were analyzed, it became obvious that the design formulas used in establishing American Standard flange dimensions predicted fantastically high localized stresses even when the joint assembly performed satisfactorily. Since a method of designing by test was being sought, a reconciliation of the apparent contradictions between theory and test results had to be explored. To find the answer, attention was turned to the behavior under load of the steel being tested in pipe wall and flange. Also, the stress factors in the formulas were further examined to discover whether or not a different concept of design would compose the apparent differences between theory and test results. It was found that theory fits the data when the concept of calculated stress level design is displaced by a concept of limiting-strain design. Then there was good correlation between theory, the test results, and past field experience and practice.” Simply put, the design of flange thickness was performed as a limiting strain type of design procedure and not based on stress. The limiting strain was 5,000 $\mu\text{in./in.}$ as determined by the 0.5 percent load extension method.

4. Many steel ring flanges have been supplied with thicknesses and dimensions that match the tables herein since these initial investigations were performed in the 1940s and 1950s by the ASME/AWWA committees leading up to the first edition of AWWA C207. As Barnard wrote in 1950, “the primary aim in flange design should be to prevent joint leakage since steel flange joints do not fail by fracture.” The current flange task group has found this to be true over the past 60 years, as there have been no reported occurrences of steel flanges fracturing when servicing the pressure that they were supplied to meet.

5. The determination of the steel cylinder thickness at the flange attachment to be used in this standard is based on the design procedures for internal pressures shown in AWWA M11 *Steel Pipe—A Guide for Design and Installation*. This practice is deemed acceptable, based on empirical data of successful performance dating back to the early 1950s.

Tables 2 and 3 of the standard are based on historical dimensions and are presented without additional calculations.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF* International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF)

* NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. An advisory program formerly administered by USEPA, Office of Drinking Water, discontinued on Apr. 7, 1990.
2. Specific policies of the state or local agency.
3. Two standards developed under the direction of NSF: NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects; and NSF/ANSI 61, Drinking Water System Components—Health Effects.
4. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,[†] and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA C228 does not address additives requirements. Thus, users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

* Persons outside the United States should contact the appropriate authority having jurisdiction.

† Both publications available from National Academy of Sciences, 500 Fifth Street, N.W., Washington, DC 20001.

II. Special Issues. Ring flanges included in this standard are for integral use on stainless-steel pipe only, and not for use as a loose backup flange. The thicknesses shown in the ring flange tables are based on the LaTour-Barnard analysis as presented in the *Steel Ring Flanges for Steel Pipe—ARMCO Bulletin 47A* (1947) and have been used successfully in the waterworks industry for more than 50 years. The flange thickness design using the LaTour-Barnard analysis is based on limiting flange stress to 22,500 psi (155 MPa) at the rated pressure. Thickness design of blind flanges has been based on the ASME Boiler and Pressure Vessel Code Design Method in Section VIII, Division 1, UG-34.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following items should be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA C228 Stainless-Steel Pipe Flange Joints for Water Service—Sizes 2 In. through 72 In. (50 mm Through 1,800 mm), of latest edition.
2. Whether compliance with NSF/ANSI 61, Drinking Water System Components—Health Effects, is required.
3. Details of other federal, state or provincial, and local requirements (Sec. 4.1.1).
4. Mill test certification (Sec. 4.1.3.5).
5. Class of flange required (Tables 2, 3, and 4).
6. Inside diameter of flanges (Tables 2 and 3).
7. Gaskets—rubber or nonasbestos (Sec. 4.1.5) and gasket thickness.
8. Affidavit of compliance, if required (Sec 6.2).

III.B. *Modification to Standard.* Any modification of the provisions, definitions, or terminology in this standard must be provided by the purchaser.

IV. Major Revisions. Major revisions made to the standard in this edition include the following:

1. Extensive new wording was added to the foreword under Sec. I.B History providing background on the ASME/AWWA committee's work and a summary of the five years of research of the Steel Pipe Special Flange Task Group regarding development history of the flange dimensions in the standard.

2. The title of Sec. 1.3.2 was changed from "Pressure Ratings" to "Pressure Limits" and portions of the section were deleted since the information was redundant with the information provided in the tables.

3. Section 2 References was updated to reflect revised references added to the standard.

4. Added a definition for transient pressures; revised the definitions for dual certification, field test pressure, and working pressures; and deleted the definition for surge pressure in Section 3.

5. Additional materials were added to Sec. 4.1.3.4 Minimize strength.

6. Sec. 4.1.5 Gaskets was rewritten.

7. Table 1, Flange Gasket Materials, Type and Thickness, was revised and compressed-fiber (CFG) and polytetrafluoroethylene (PTFE) materials were added. Footnotes 1 and 2 were added to provide additional information on gasket materials.

8. A note on maximum pressure up to 125 percent of working pressure was added to Tables 2, 3, and 4.

9. Figure 1, Attachment of Flange, was revised and the hub-type flange detail was deleted.

10. Figure 2 was updated to reflect a maximum of 2 degrees total for two flange mating surfaces.

11. A new Sec. 6.2 for Affidavit of Compliance was added.

V. Comments. If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services Department at 303.794.7711, FAX 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at standards@awwa.org.



**American Water Works
Association**

Dedicated to the World's Most Important Resource™

ANSI/AWWA C228-14
(Revision of ANSI/AWWA C228-08)

AWWA Standard

Stainless-Steel Pipe Flange Joints for Water Service—Sizes 2 In. Through 72 In. (50 mm Through 1,800 mm)

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes stainless-steel ring-type slip-on flanges and blind flanges for use in conjunction with stainless-steel pipe used in facilities of water-works service.

Sec. 1.2 Purpose

The purpose of this standard is to provide minimum material requirements and dimensions for a variety of stainless-steel flanges for attachment to stainless-steel piping systems.

Sec. 1.3 Application

1.3.1 *Intended use.* Flanges in this standard are described in the following tables:

1. Table 2 and Table 3, ring-type slip-on flanges
2. Table 4, blind flanges

Flanges covered in this standard are intended for use with stainless-steel pipe or appurtenances meeting the requirements of ANSI/AWWA C220, ANSI/