



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA C230-16
(Revision of ANSI/AWWA C230-11)

AWWA Standard

Stainless-Steel Full- Encirclement Repair and Service Connection Clamps for 2-in. Through 12-in. (50-mm Through 300-mm) Pipe

Effective date: Dec. 1, 2016.

First edition approved by AWWA Board of Directors Jan. 23, 2011.

This edition approved June 19, 2016.

Approved by American National Standards Institute June 30, 2016.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed on the first page of the Official Notice section of *Journal – American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal – American Water Works Association* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of publication. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or emailing info@ansi.org.

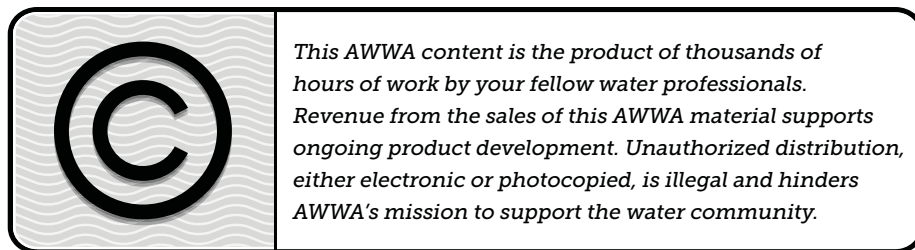

ISBN-13, print: 978-1-62576-189-7

eISBN-13, electronic: 978-1-61300-398-5

DOI: <http://dx.doi.org/10.12999/AWWA.C230.16>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2016 by American Water Works Association
Printed in USA

Committee Personnel

The Steel Water Pipe Manufacturer's Technical Advisory Committee (SWPMTAC) Task Group for AWWA C230, which updated this standard, had the following personnel at the time:

Daryl Piontek, *Chair*

E. Bird, Smith-Blair, Texarkana, Texas	(AWWA)
S. Bradberry, Ford Meter Box Company, Birmingham, Ala.	(AWWA)
A. Collins, JCM Industries, Nash, Texas	(AWWA)
T. Crail, Straub Coupling, Bonsall, Calif.	(AWWA)
B. Dix, Felker Brothers, Marshfield, Wis.	(AWWA)
J. Grocki, Swepeco Tube LLC, Enfield, Conn.	(AWWA)
C.G. Hines, Mueller Company, Cleveland, Tenn.	(AWWA)
T. Keffaber, Ford Meter Box Company, Wabash, Ind.	(AWWA)
M. Langenhan, Total Piping Solutions Inc., Olean, N.Y.	(AWWA)
G. Larsen, Smith Blair, Texarkana, Texas	(AWWA)
A. Lemke, Romac Industries Inc., Bothell, Wash.	(AWWA)
H. Mosley, Mueller Company, Cleveland, Tenn.	(AWWA)
D. Piontek, Total Piping Solutions Inc., Olean, N.Y.	(AWWA)
J. Reinheimer, Robar Industries, Surrey, B.C., Canada	(AWWA)
D. Seals, JCM Industries, Nash, Texas	(AWWA)
N. Thogersen, Romac Industries Inc., Bothel, Wash.	(AWWA)
A. Thoemke, Victaulic Company, Atlanta, Ga.	(AWWA)

The AWWA Standards Committee on Stainless-Steel Pipe, which reviewed and approved this standard, had the following personnel at the time of approval:

J. Warren Green, *Chair*

Mike Quinnell, *Secretary*

General Interest Members

R.J. Card,* Lockwood, Andrews & Newman, Sugar Hill, Ga.	(AWWA)
J.W. Green, Lockwood, Andrews & Newman, Naperville, Ill.	(AWWA)
J.E. Koch, HDR Engineering Inc., Burlington, Wash.	(AWWA)

* Alternate

D. Mason,* Standards Council Liaison, Holden, Mo.	(AWWA)
C.A. Prein, Prein & Newhof, Grand Rapids, Mich.	(AWWA)
E.S. Ralph,* Standards Engineer Liaison, AWWA, Denver, Colo.	(AWWA)
R.M. Schwecke,† HDR Engineering Inc., Phoenix, Ariz.	(AWWA)
T.A. Tovi, CH2M, Bellevue, Wash.	(AWWA)

Producer Members

D. Brewer, Robar Industries Ltd., Surrey, B.C., Canada	(AWWA)
A. Collins, JCM Industries, Nash, Texas	(AWWA)
D. Dechant, Dechant Infrastructure Service, Aurora, Colo.	(AWWA)
B.D. Keil, Northwest Pipe Company, Draper, Utah	(AWWA)
R.D. Mielke,† Northwest Pipe Company, Raleigh, N.C.	(AWWA)
C.P. Shelley, Victaulic Company, Atlanta, Ga.	(AWWA)
C.C. Sundberg,† Victaulic Company, Issaquah, Wash.	(AWWA)

User Members

M. Garcia, Denver Water, Denver, Colo.	(AWWA)
J.E. Holzapfel, City of Naperville, Naperville, Ill.	(AWWA)
D.J. Martin, Ashwaubenon Water and Sewer Utility, Green Bay, Wis.	(AWWA)
J.F. O'Brien, Genesee County Water and Waste Service, Flint, Mich.	(AWWA)
B.R. Osborne, Clark County Water Reclamation District, Las Vegas, Nev.	(AWWA)
B. Powell, Green Bay Water Utility, Green Bay, Wis.	(AWWA)
M. Quinnell, Saginaw-Midland Water Supply, Bay City, Mich.	(AWWA)
R. Wagner, Dallas Water Utilities, Dallas, Texas	(AWWA)

* Liaison, nonvoting

† Alternate

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword		2	References 2
I	vii	3	Definitions 4
I.A	vii	4	Requirements
I.B	vii	4.1	Materials of Construction 5
I.C	vii	4.2	Design 7
II	viii	4.3	Manufacturing 7
II.A	viii	4.4	Installation Instructions 8
		5	Verification
II.B	ix	5.1	Inspection 9
		5.2	Quality Assurance 9
III	ix	5.3	Test Procedures 9
III.A	ix	6	Delivery
		6.1	Marking 11
III.B	x	6.2	Packing and Shipping 11
IV	x	6.3	Affidavit of Compliance 11
V	x		
Standard		Figure	
1	General	1	Hydrostatic Test Fixture for Full-Encirclement Repair Clamp 10
1.1	Scope 1		
1.2	Purpose 2		
1.3	Application 2		

This page intentionally blank.

Foreword

This foreword is for information only and is not a part of ANSI/AWWA C230.*

I. Introduction.

I.A. *Background.* Stainless-steel full-encirclement repair clamps are used to provide a simple and economical means of repairing holes, cracks, or breaks in water or wastewater mains. The stainless-steel full-encirclement service connection clamp includes a branch outlet and matt gasket that provides a full-encirclement (360-degree) seal around the existing pipe. The full-encirclement service connection clamp outlet is an effective means of attaching a tapping valve and tapping machine for main-line tapping.

I.B. *History.* This is the second edition of this standard. This standard was prepared in response to requests from users of stainless-steel full-encirclement repair and service connection clamps for various pipe materials. The first edition was approved by the AWWA Board of Directors on Jan. 23, 2011. This edition was approved on June 19, 2016.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.[†] Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

† Persons outside the United States should contact the appropriate authority having jurisdiction.

2. Two standards developed under the direction of NSF*: NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.

3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,[†] and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 60 or NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

AWWA/ANSI C230 does not address additives requirements. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

II. Special Issues.

II.A. *Advisory Information on Product Performance.* Repair clamp applications for pipeline repairs are wide and varied and can be used for temporary or long-term service. The service performance of the full-encirclement repair clamp is dependent on a number of variables, including size and type of repair; the structural integrity of the pipe; pipe material; pipe diameter; the pipeline content; surface finish; temperature; and working pressure of the piping system. Because of the number of variables involved, it is recommended that the repair clamp manufacturer be consulted regarding model selection, proper application, and the anticipated performance of the repair clamp for specific end-user pipe repair needs prior to product purchase and usage. When

* NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

† Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20001.

significant damage to the pipe is encountered, the manufacturer should be consulted to determine whether a repair clamp is appropriate for the repair.

II.B. *Chlorine and Chloramine Degradation of Elastomers.* The selection of materials is critical for water service and distribution piping in locations where there is a possibility that elastomers will be in contact with chlorine or chloramines. Documented research has shown that elastomers such as gaskets, seals, valve seats, and encapsulations may be degraded when exposed to chlorine or chloramines. The impact of degradation is a function of the type of elastomeric material, chemical concentration, contact surface area, elastomer cross section, and environmental conditions as well as temperature. Careful selection of and specifications for elastomeric materials and the specifics of their application for each water system component should be considered to provide long-term usefulness and minimum degradation (swelling, loss of elasticity, or softening) of the elastomer specified.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following information should be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA C230, Stainless-Steel Full-Encirclement Repair and Service Connection Clamps for 2-In. Through 12-In. (50-mm Through 300-mm) Pipe, of latest revision.
2. Quantity and type.
3. Materials of construction.
4. Type of pipe(s), including specification to which it is made, or specification and tolerance of outside diameter.
5. Nominal pipe size(s) and range.
6. Actual outside diameter (OD) of pipe, including any coatings.
7. Wall thickness or class of pipe.
8. Type of service, including line content; above or below ground; and so on.
9. System pressure requirements.
10. Operating temperature range.
11. Special requirements, such as gasket material, gaskets for electrical conductivity, corrosive environment, coatings, and so on.
12. Tapping outlet specifications (if required), including thread type and size.
13. Width of full-encirclement repair clamp band desired.
14. Inspection by the purchaser.

15. Documentation requirements, including material certifications and certificate of compliance.

16. Hydrostatic proof test.

17. Whether compliance with NSF/ANSI 61, Drinking Water System Components—Health Effects, is required.

18. Details of other federal, state or provincial, and local requirements (Sec. 4.1.1).

III.B. *Modification to Standard.* Any modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

IV. Major Revisions. Major revisions made to the standard in this edition include the following:

1. The title was revised to include the sizes of repair clamps included in the standard.

2. An advisory statement was added in the foreword (Sec. II.B) regarding chlorine and chloramine degradation of elastomers.

3. The definition for transient pressure was revised (Section 3).

4. The water service temperature for gasket performance was increased (Sec. 4.1.5.1).

5. Figure 1 was revised.

6. The minimum temperature for leak-proof seal test was decreased (Sec. 5.3.1.3)

V. Comments. If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at standards@awwa.org.



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA C230-16
(Revision of ANSI/AWWA C230-11)

AWWA Standard

Stainless-Steel Full-Encirclement Repair and Service Connection Clamps for 2-In. Through 12-In. (50-mm Through 300-mm) Pipe

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes fabricated full-encirclement stainless-steel band clamps for use in the repair or tapped service connection of potable water, wastewater, and reclaimed water piping systems. They are intended for nominal pipe sizes 2 in. (50 mm) through 12 in. (300 mm). Full-encirclement repair clamps shall be manufactured completely from stainless-steel or a combination of stainless-steel band and cast ductile-iron lug, along with stainless-steel or low-alloy carbon steel bolts and nuts, depending on service requirements and the purchaser's documents. Tapped service connection outlets may be provided and shall range from ½-in. through 3-in. (12-mm through 75-mm) sizes. This standard does not cover stainless-steel tapping saddles the seal of which is not fully circumferential. Repair clamps for larger than 12-in. (300-mm) nominal pipe diameters are available from various manufacturers but are not covered by this standard.