



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA C302-16**  
(Revision of ANSI/AWWA C302-11)

**AWWA Standard**

# Reinforced Concrete Pressure Pipe, Noncylinder Type

Effective date: Jan. 1, 2017.

First edition approved by AWWA Board of Directors Sept. 4, 1951.

This edition approved June 19, 2016.

Approved by American National Standards Institute Aug. 10, 2016.




## AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed on the first page of the Official Notice section of *Journal – American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal – American Water Works Association* publication of the official notice.

## American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of publication. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or emailing [info@ansi.org](mailto:info@ansi.org).

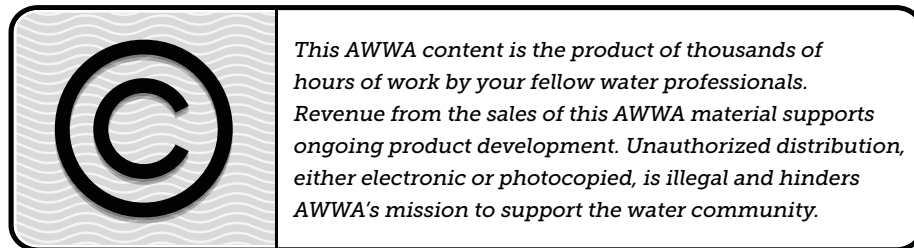

ISBN-13, print: 978-1-62576-200-9

eISBN-13, electronic: 978-1-61300-402-9

DOI: <http://dx.doi.org/10.12999/AWWA.C302.16>

---

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2017 by American Water Works Association  
Printed in USA

## Committee Personnel

---

The AWWA Standards Subcommittee on ANSI/AWWA C302, which reviewed and developed this standard, had the following personnel at the time:

Terri A. Tovey, *Chair*

S.A. Arnaout, Forterra Pressure Pipe Inc., Dallas, Texas	(AWWA)
H.H. Bardakjian, Consulting Engineer, Glendale, Calif.	(AWWA)
G.A. Davidenko, Northwest Pipe Company, Saginaw, Texas	(AWWA)
W.C. Duke, Bureau of Reclamation, Denver, Colo.	(USBR)
T.A. Tovey, CH2M, Bellevue, Wash.	(AWWA)

The AWWA Standards Committee on Concrete Pressure Pipe, which reviewed and approved this standard, had the following personnel at the time of approval:

Wayne R. Brunzell, *Chair*

Richard I. Mueller, *Secretary*

### *User Members*

K.A. Danley, Des Moines Water Works, Des Moines, Iowa	(AWWA)
W.C. Duke, Bureau of Reclamation, Denver, Colo.	(USBR)
N.D. Faber, San Diego County Water Authority, Escondido, Calif.	(AWWA)
J.A. Fleming,* Standards Council Liaison, Greater Cincinnati Water Works, Cincinnati, Ohio	(AWWA)
J.C. Gehrig,† Tarrant Regional Water District, Fort Worth, Texas	(AWWA)
J.G. Grunow, Louisville Water Company, Louisville, Ky.	(AWWA)
D.H. Marshall, Tarrant Regional Water District, Fort Worth, Texas	(AWWA)
N.A. Wigner, Los Angeles Department of Water and Power, Los Angeles, Calif.	(AWWA)

### *General Interest Members*

H.H. Bardakjian, Consulting Engineer, Glendale, Calif.	(AWWA)
G.E.C. Bell, HDR Engineering Inc., Claremont, Calif.	(AWWA)
W.R. Brunzell, Brunzell Associates Ltd., Skokie, Ill.	(AWWA)

---

\* Liaison, nonvoting

† Alternate

B.C. Coltharp, Freese and Nichols Inc., Fort Worth, Texas	(AWWA)
D. Dechant, Dechant Infrastructure Services, Aurora, Colo.	(AWWA)
F.S. Kurtz,* Standards Engineer Liaison, AWWA, Denver, Colo.	(AWWA)
S.A. McKelvie,† HDR Engineering Inc., Boston, Mass.	(AWWA)
J.J. Roller, CTL Group, Skokie, Ill.	(AWWA)
A.E. Romer, AECOM, Orange, Calif.	(AWWA)
T.A. Tovey, CH2M, Bellevue, Wash.	(AWWA)
A.W. Tremblay, Tipp City, Ohio	(AWWA)
M.S. Zarghamee, Simpson Gumpertz & Heger Inc., Waltham, Mass.	(AWWA)

*Producer Members*

S.A. Arnaout, Forterra Pressure Pipe Inc., Dallas, Texas	(AWWA)
G. Bizien,† Forterra Pressure Pipe Inc., St. Eustache, Que., Canada	(AWWA)
K.M. Brown, Vianini Pipe Inc., Somerville, N.J.	(AWWA)
G.A. Davidenko, Northwest Pipe Company, Saginaw, Texas	(AWWA)
M. DeFranco,† DECAST Ltd., Utopia, Ont., Canada	(AWWA)
V. DeGrande,† Ameron Water Transmission Group, Rancho Cucamonga, Calif.	(AWWA)
B.D. Keil,† Northwest Pipe Company, Draper, Utah	(AWWA)
R.I. Mueller, American Concrete Pressure Pipe Association, Orange, Calif.	(ACPPA)
J. Olmos, Ameron Water Transmission Group, Rancho Cucamonga, Calif.	(AWWA)
J.A. Tully, DECAST Ltd., Utopia, Ont., Canada	(AWWA)

---

\* Liaison, nonvoting

† Alternate

# Contents

*All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.*

SEC.	PAGE	SEC.	PAGE
<b>Foreword</b>		4.3	Data to Be Submitted by the Manufacturer ..... 6
I	Introduction..... vii	4.4	Materials ..... 7
I.A	Background..... vii	4.5	Pipe Details..... 11
I.B	History..... vii	4.6	Fabrication ..... 16
I.C	Acceptance..... vii	4.7	Fittings and Special Pipe ..... 22
II	Special Issues..... ix	<b>5</b>	<b>Verification</b>
II.A	Chlorine and Chloramine Degradation of Elastomers ..... ix	5.1	Inspection and Testing by the Purchaser ..... 24
III	Use of This Standard..... ix	5.2	Tests..... 25
III.A	Purchaser Options and Alternatives ..... ix	5.3	Testing of Pipe ..... 25
III.B	Modification to Standard ..... x	<b>6</b>	<b>Delivery</b>
IV	Major Revisions..... x	6.1	Marking..... 26
V	Comments ..... x	6.2	Transportation and Delivery ..... 26
		6.3	Affidavit of Compliance ..... 27
<b>Standard</b>			
<b>1</b>	<b>General</b>	<b>Tables</b>	
1.1	Scope ..... 1	1	Maximum Individual Pipe Length ..... 11
1.2	Purpose ..... 2	2	Pipe Squareness Tolerance ..... 12
1.3	Application..... 2	3	Internal Diameter Tolerance..... 12
<b>2</b>	<b>References</b> ..... 2	4	Minimum Wall Thickness of Pipe..... 13
<b>3</b>	<b>Definitions</b> ..... 5	5	Wall Thickness Tolerances..... 14
<b>4</b>	<b>Requirements</b>	6	Minimum Thickness of Sheet or Plate for Fittings of Various Diameters..... 23
4.1	Permeation ..... 6		
4.2	Drawings and Data to Be Provided by the Purchaser..... 6		

This page intentionally blank.

# Foreword

*This foreword is for information only and is not a part of ANSI\*AWWA C302.*

## **I. Introduction.**

I.A. *Background.* Reinforced concrete pressure pipe of the noncylinder type has been used extensively since the early twentieth century. This type of pipe is made with one or more cages of steel reinforcing bars or wire encased in concrete. The concrete is usually placed by vertical or centrifugal casting methods. Rubber-gasketed joints may have either steel or concrete bell-and-spigot surfaces. The pipe is manufactured in sizes ranging from 12 in. (300 mm) to more than 144 in. (3,660 mm) in diameter and is generally made in 8-ft (2.5-m) through 24-ft (7.5-m) laying lengths.

Reinforced concrete pressure pipe, noncylinder type, is designed for the specific combination of internal pressure and external load required for a project, in accordance with the procedures outlined in AWWA Manual M9, *Concrete Pressure Pipe*. This pipe is normally limited in working pressure to a maximum of 55 psi (380 kPa) and is used for low-pressure transmission lines in irrigation, industrial, and domestic water supply systems, and other applications (see Section III of the foreword).

Design criteria and examples along with installation recommendations and other related data pertaining to this pipe are covered in AWWA Manual M9.

I.B. *History.* In April 1943, the AWWA Board of Directors authorized the preparation of "Tentative Emergency Specifications for Concrete Pressure Pipe." These tentative specifications, which covered several types of pipe in a single document, served a useful purpose during World War II but became obsolete and were withdrawn.

The first edition of this standard was approved as tentative on Sept. 4, 1951, and made a standard on May 5, 1953. The second edition was made a standard on July 19, 1957. Substantial changes, including the addition of limiting stresses for combined loading design, were incorporated into the third edition, which was made a standard on Jan. 27, 1964.

Subsequent editions were approved on Jan. 28, 1974; June 14, 1987; Jan. 22, 1995; and Jan. 23, 2011.

This edition was approved by the AWWA Board of Directors on June 19, 2016.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF

---

\* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

International (NSF) to develop voluntary third-party consensus standards and a certification program for all direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.\* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.
2. Two standards developed under the direction of NSF<sup>†</sup>: NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.
3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,<sup>‡</sup> and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA C302 does not address additives requirements. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.

---

\* Persons outside the United States should contact the appropriate authority having jurisdiction.

† NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

‡ Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20001.

2. Determine the status of certifications by all parties offering to certify products for contact with, or treatment of, drinking water.

3. Determine current information on product certification.

**II. Special Issues.** Special issues are addressed in AWWA Manual M9, *Concrete Pressure Pipe* and in Sec. II.A.

II.A. *Chlorine and Chloramine Degradation of Elastomers.* The selection of materials is critical for water service and distribution piping in locations where there is a possibility that elastomers will be in contact with chlorine or chloramines. Documented research has shown that elastomers such as gaskets, seals, valve seats, and encapsulations may be degraded when exposed to chlorine or chloramines. The impact of degradation is a function of the type of elastomeric material, chemical concentration, contact surface area, elastomer cross section, and environmental conditions as well as temperature. Careful selection of, and specifications for, elastomeric materials and the specifics of their application for each water system component should be considered to provide long-term usefulness and minimum degradation (swelling, loss of elasticity, or softening) of the elastomer specified.

**III. Use of This Standard.** It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following information should be provided by the purchaser:

1. Standard used, that is, ANSI/AWWA C302, Standard for Reinforced Concrete Pressure Pipe, Noncylinder Type, of latest revision.

2. Whether compliance with NSF/ANSI 61, Drinking Water System Components—Health Effects, is required.

3. If submission of manufacturer's design calculations for approval before manufacturing any pipe will be required.

4. Details of other federal, state or provincial, and local requirements (Sec. 4.4).

5. The working pressure, surge pressure, field-test pressure, depth and weight of earth cover, trench bedding condition, and live load for which the pipe is to be designed (Sec. 4.2.1).

6. If the manufacturer is not permitted to supply pipe from inventory (Sec. 4.3.1).

7. If detailed drawings and schedules are to be submitted for review (Sec. 4.3.1 and Sec. 4.7.1).

8. If a tabulated layout schedule will be required (Sec. 4.3.2).

9. Type of cement required, if there is a preference (Sec. 4.4.1.1).

10. If submission of the type and amount of admixtures will be required (Sec. 4.4.5).
11. If either steel or concrete bell-and-spigot joint or double spigot-and-sleeve joint of steel and concrete will be required (Sec. 4.5.3.1).
12. If submission for approval of welder qualification (Sec. 4.6.2) and welding procedure specifications (Sec. 4.6.3) will be required.
13. Fittings details (Sec. 4.7.1).
14. If the purchaser desires to inspect the material, pipe, and fittings at the manufacturer's plant (Sec. 5.1.1).
15. If any material or manufacturing test reports will be required (Sec. 5.1.2).
16. If steel test specimens will be required (Sec. 5.2.3).
17. If welds in reinforcements will be required (Sec. 5.2.5).
18. If hydrostatic pressure testing of pipe at the manufacturer's yard will be required (Sec. 5.3.2).
19. If an affidavit of compliance will be required (Sec. 6.3).

III.B. *Modification to Standard.* Any modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

**IV. Major Revisions.** Major revisions made to the standard in this edition include the following:

1. New language on chlorine and chloramine degradation of elastomers has been added to the Special Issues section (Sec. II.A) of the foreword.

**V. Comments.** If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX 303.795.7603; or write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at [standards@awwa.org](mailto:standards@awwa.org).



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA C302-16**  
(Revision of ANSI/AWWA C302-11)

**AWWA Standard**

---

# Reinforced Concrete Pressure Pipe, Noncylinder Type

---

## SECTION 1: GENERAL

---

### Sec. 1.1 Scope

This standard describes the manufacture of circumferentially reinforced concrete pressure pipe, without a steel cylinder and not prestressed, in sizes from 12 in. to 144 in. (300 mm to 3,660 mm) inclusive and for working pressures not exceeding 55 psi (380 kPa) and working plus surge pressures not exceeding a total pressure of 65 psi (450 kPa). This type of pipe is designed for the internal pressure, external loads, and bedding conditions designated by the purchaser. Pipe of diameters larger than 144 in. (3,660 mm) has been manufactured based on the concepts of this standard. This standard does not include requirements for design, handling, delivery, laying, field testing, or disinfection of pipe. See AWWA Manual M9, *Concrete Pressure Pipe*, for information on these topics.

1.1.1 *Essential requirements.* The pipe shall have the following principal features: a reinforcing cage or cages of steel bars, wire, or welded wire reinforcement; concrete cover on each side of each reinforcing cage; and a joint with a preformed rubber gasket(s) of circular cross section, designed so that the joint will be watertight under the conditions of service specified by the purchaser.