



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA C550-17**  
(Revision of ANSI/AWWA C550-13)

**AWWA Standard**

# Protective Interior Coatings for Valves and Hydrants

Effective date: Aug. 1, 2017.

First edition approved by AWWA Board of Directors Jan. 25, 1981.

This edition approved Jan. 14, 2017.

Approved by American National Standards Institute Feb. 28, 2017.




## AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed on the first page of the Official Notice section of *Journal – American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal – American Water Works Association* publication of the official notice.

## American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of publication. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or emailing [info@ansi.org](mailto:info@ansi.org).

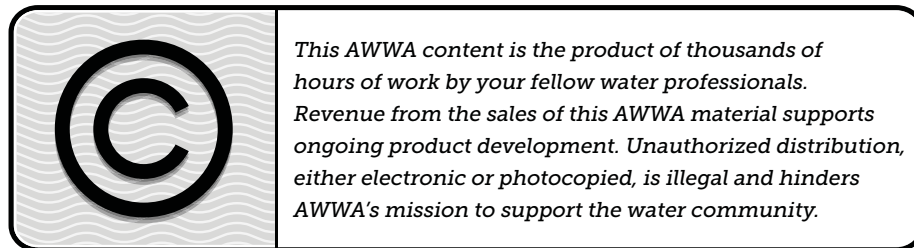

ISBN-13, print: 978-1-62576-231-3

eISBN-13, electronic: 978-1-61300-429-6

DOI:<http://dx.doi.org/10.12999/AWWA.C550.17>

---

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2017 by American Water Works Association  
Printed in USA

## Committee Personnel

The AWWA Standards Committee on Valves and Hydrants, which reviewed and approved this standard, had the following personnel at the time of approval:

Jim Clevenger, *Chair*

### *General Interest Members*

A. Ali, ADA Consulting, Surrey, B.C., Canada	(AWWA)
J. Clevenger, Dixon Engineering Inc., Albion, Ind.	(AWWA)
A. Fontana, Truesdail Laboratories Inc., Irvine, Calif.	(AWWA)
J. Hebenstreit, Underwriters Laboratories, Northbrook, Ill.	(AWWA)
C.H. Kirby, Lockwood, Andrews & Newnan Inc., Houston, Tex.	(AWWA)
D.D. Naomi, CPS Engineering & Land Inc., Lafayette, La.	(AWWA)
S.M. Passarelli,* Standards Engineer Liaison, AWWA, Denver, Colo.	(AWWA)

### *Producer Members*

L.R. Dunn, US Pipe & Foundry Company, Birmingham, Ala.	(AWWA)
P. Gifford, Mueller Co., Chattanooga, Tenn.	(AWWA)
T.C. Harbour,† Mueller Company, Decatur, Ill.	(AWWA)
R. Hasak, Tnemec Company, Kansas City, Mo.	(AWWA)
K. Huelsman, Clow Valve Company, Oskaloosa, Iowa	(AWWA)
K. Johnson,† M&H Valve Company, Anniston, Ala.	(AWWA)
R. Looney, American AVK Company, Minden, Nev.	(AWWA)
T.J. Mettler, Waterous Company, South St. Paul, Minn.	(AWWA)
D.B. Scott,† American Flow Control, Birmingham, Ala.	(AWWA)
J.H. Wilbur,† American AVK, Littleton, Colo.	(AWWA)
K.J. Wright, East Jordan Iron Works, East Jordan, Mich.	(AWWA)

### *User Members*

K.T. Browning, Orlando Utilities Commission, Orlando, Fla.	(AWWA)
M. Garcia,* Standards Council Liaison, Denver Water, Denver, Colo.	(AWWA)
S.J. Gilberg, City of Eagan, Eagan, Minn.	(AWWA)

---

\* Liaison, nonvoting

† Alternate

J.C. Hall, City of Joliet, Joliet, Ill.	(AWWA)
M. MacConnell, Metro Vancouver Library, Burnaby, B.C., Canada	(AWWA)
M. Mahavongtrakul, SFPUC, City and County of San Francisco, San Francisco, Calif.	(AWWA)
K.A. Nadeau, Connecticut Water Company, Clinton, Conn.	(AWWA)
M.K. Stankovich, City of Haverhill, Haverhill, Mass.	(AWWA)

# Contents

*All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.*

SEC.	PAGE	SEC.	PAGE
<b>Foreword</b>		<b>4</b>	<b>Requirements</b>
I	vii	4.1	Materials ..... 4
I.A	vii	4.2	Coating Process..... 4
I.B	vii	<b>5</b>	<b>Verification</b>
I.C	vii	5.1	Test Procedures ..... 5
II	viii	5.2	Coating Repairs ..... 7
III	viii	5.3	Basis for Rejection ..... 7
III.A	viii	<b>6</b>	<b>Delivery</b>
	viii	6.1	Affidavit of Compliance ..... 7
III.B	ix	<b>Appendix</b>	
IV	ix	<b>A</b>	<b>Handling, Inspection, and Holiday Testing</b>
V	ix	A.1	Handling ..... 9
<b>Standard</b>		A.2	Inspection ..... 9
<b>1</b>	<b>General</b>	A.3	Holiday Testing..... 9
1.1	1	<b>Table</b>	
1.2	2	1	Schedule of Immersion Testing..... 5
1.3	2		
<b>2</b>	<b>References</b> ..... 2		
<b>3</b>	<b>Definitions</b> ..... 2		

This page intentionally blank.

# Foreword

*This foreword is for information only and is not a part of ANSI\*/AWWA C550.*

## **I. Introduction.**

I.A. *Background.* This standard describes protective interior coatings for valves used for water supply, wastewater collection and treatment, and reclaimed water service having a pH range from 4 to 9; and for hydrants used for water supply service. The standard describes the material, application, and performance requirements for these interior coatings. The coating shall be either a liquid or powder system and shall not contain coal tar. These coatings are applied to interior ferrous surfaces of valves and hydrants where corrosion protection is specified.

I.B. *History.* An AWWA joint task group was formed on Jan. 15, 1971, to study protective coatings for valves and hydrants in response to a request from the Gate Valve and Swing Check Valve, Butterfly Valve, and Fire Hydrant Standards committees. The purpose of this task group was to assemble all of the available information on protective coatings for valves and hydrants and to prepare a report from this information.

The AWWA Standards Committee on Protective Interior Coatings for Valves and Hydrants produced the first edition of ANSI/AWWA C550 in 1980. It was approved by the AWWA Board of Directors on Jan. 25, 1981. Subsequent editions were approved on Jan. 28, 1990; June 17, 2001; Jan. 16, 2005; and Jan. 20, 2013. This edition of the standard was approved on Jan. 14, 2017.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF<sup>†</sup>) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.<sup>‡</sup> Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health

---

\* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

† NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

‡ Persons outside the United States should contact the appropriate authority having jurisdiction.

effects of products and drinking water additives from such products, state, provincial, and local agencies may use various references, including

1. Specific policies of the state, provincial, or local agency.
2. Two standards developed under the direction of NSF: NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.
3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,\* and other standards considered appropriate by the state, provincial, or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states, provinces, or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA C550 does not address additives requirements. Users of this standard should consult the appropriate state, provincial, or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

**II. Special Issues.** This standard has no applicable information for this section.

**III. Use of This Standard.** It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following items should be provided by the purchaser:

---

\* Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20001.



1. Standard used—that is, ANSI/AWWA C550, Protective Interior Coatings for Valves and Hydrants, of latest revision.
2. Details of any special service conditions such as salt water, acid, high temperature, wastewater, or reclaimed water must be communicated to the manufacturer or its agent (Sec. 1.1.1.3).
3. Details of other federal, state or provincial, and local requirements (Sec. 4.1).
4. Other coating material not specified in Sec. 4.1 that may be required for use in nonpotable water.
5. Any special surface preparation requirements (Sec. 4.2.1).
6. Holiday testing, if required. Consult manufacturers for availability of special holiday tests (Sec. 5.1.3).
7. Affidavit or certificate of compliance, if required (Sec. 6.1). If holiday testing is required, purchasers should consult manufacturers for same or state this in their specification.

III.B. *Modification to Standard.* Any modification of the provisions, definitions, or terminology in this standard must be provided by the purchaser.

**IV. Major Revisions.** Major revisions to the standard in this edition include

1. Sec. 5.3, Basis for Rejection, was added.

**V. Comments.** If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at [standards@awwa.org](mailto:standards@awwa.org).

This page intentionally blank.



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA C550-17**  
(Revision of ANSI/AWWA C550-13)

**AWWA Standard**

---

# Protective Interior Coatings for Valves and Hydrants

---

## SECTION 1: GENERAL

---

### Sec. 1.1 Scope

This standard describes protective interior coatings for valves used for water supply, wastewater collection and treatment, and reclaimed water service having a pH range from 4 to 9; and for hydrants used for water supply service. The standard describes the material, application, and performance requirements for these interior coatings. The coating shall not contain coal tar. These coatings are applied for protection of ferrous surfaces of valves and hydrants.

#### 1.1.1 *Special coating conditions.*

1.1.1.1 Exterior coatings. It is normal commercial practice for the coating applicator to apply this coating to the exterior surface of resilient seat gate valves and hydrant components. It should be recognized that the performance requirements for exterior service may vary from those specified for interior use because of differences in exposure conditions.

1.1.1.2 Internal hydrant coatings. This standard covers interior hydrant coatings in areas designed for constant contact with water supply. It does not cover internal coatings of dry-barrel hydrants on areas downstream of the main valve.

1.1.1.3 Special service conditions. The purchaser and the manufacturer shall agree on special coating requirements prior to manufacturing of product if