



**American Water Works
Association**

Dedicated to the World's Most Important Resource™

ANSI/AWWA C560-14
(Revision of ANSI/AWWA C560-07)

AWWA Standard

Cast-Iron Slide Gates

Effective date: May 1, 2014.

First edition approved by AWWA Board of Directors June 26, 1941.

This edition approved Jan. 19, 2014.

Approved by American National Standards Institute Feb. 25, 2014.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or codes of any governmental authority. AWWA standards are intended to represent a consensus of the water supply industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed on the first page of the Official Notice section of *Journal - American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal - American Water Works Association* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; (212) 642-4900, or emailing info@ansi.org.

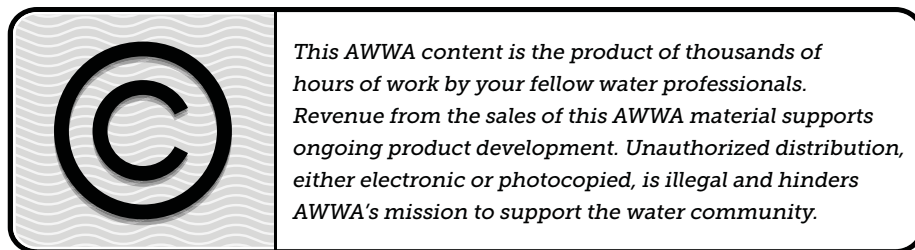

ISBN-13, print: 978-1-62576-009-8

eISBN-13, electronic: 978-1-61300-274-2

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2014 by American Water Works Association
Printed in USA

Committee Personnel

The AWWA Subcommittee for Revision of C560, Cast Iron Slide Gates, which developed this revision, had the following personnel at the time:

Rick Scott, *Chair*

J. Barnard, AFI Hydro Inc., Paris, Ont., Canada	(AWWA)
T.J. Cluin, Golden Harvest Inc., Punta Gorda, Fla.	(AWWA)
C. Gamble, Whipps Inc., Athol, Mass.	(AWWA)
K.H. Hipps, CDM Smith, Chicago, Ill.	(AWWA)
M.R. Johnson, Upper Blackstone Water Pollution Abatement District, Millbury, Mass.	(AWWA)
M. Larrea, ORBINOX Valves International, San Sebastian, Guipuzcoa, Spain	(AWWA)
D. Niblett, JASH USA, Weldon Spring, Mo.	(AWWA)
R. Scott, Pelham, Mass.	(AWWA)

The AWWA Standards Committee on Slide Gates, which reviewed and approved this standard, had the following personnel at the time of approval:

Kirk H. Hipps, *Chair*

General Interest Members

A. Ali, ADA Consulting LTD, Surrey, B.C., Canada	(AWWA)
S. Barraco, AECOM, Dallas, Texas	(AWWA)
M.D. Bennett, MWH Global, Cleveland, Ohio	(AWWA)
D.M. Flancher,* Standards Engineer Liaison, AWWA, Denver, Colo.	(AWWA)
L.C. Gerbig, Lee C. Gerbig LLC, Avon, Ind.	(AWWA)
K.H. Hipps, CDM Smith, Chicago, Ill.	(AWWA)
J.E. Koch, HDR Engineering Inc., La Conner, Wash.	(AWWA)
J. S. Lapsley,† CDM Smith, Charlotte, N.C.	(AWWA)
C. Reames, CB&I Inc., Baton Rouge, La.	(AWWA)
R. Scott, Pelham, Mass.	(AWWA)
L. Thomas,* Standards Council Liaison, Stanley Consultants, Crystal Lake, Ill.	(AWWA)

* Liaison, nonvoting

† Alternate

Producer Members

J. Barnard, AFI Hydro Inc., Paris, Ont., Canada	(AWWA)
P.E. Brunelle, Rodney Hunt-Fontaine, Orange, Mass.	(AWWA)
S. Lamb,* Nickel Institute, Huntington, W.Va.	(AWWA)
R. Niedzwiecki,† Whipps Inc., Athol, Mass.	(AWWA)
D. Niblett, JASH USA, Weldon Spring, Mo.	(AWWA)
D.R. Pauls, Waterman Ind., Exeter, Calif.	(AWWA)
D. Thomas, Ashbrook Simon-Hartley Operations, LP, Houston, Texas	(AWWA)
G.E. Whipps, Whipps Inc., Athol, Mass.	(AWWA)

User Members

R.J. Alberts, City of Pasco, Pasco, Wash.	(AWWA)
M.R. Johnson, Upper Blackstone Water Pollution Abatement District, Millbury, Mass.	(AWWA)
H.C. Suan, Associated Engineering Alberta Ltd., Edmonton, Alta., Canada	(AWWA)
J. Weber, MWRDGC, Chicago, Ill.	(AWWA)
D.C. Wheelock, Lower Colorado River Authority, Austin, Texas	(AWWA)

* Informational member, nonvoting

† Alternate

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
<i>Foreword</i>		3	Definitions.....3
I	Introduction.....vii	4	Requirements
I.A	Background.....vii	4.1	Data to Be Provided by the Supplier....5
I.B	History.....viii	4.2	Data to Be Provided by the Manufacturer5
I.C	Acceptance.....viii	4.3	Materials5
II	Special Issues.....ix	4.4	General Design6
II.A	Background.....ix	4.5	Manufacture13
III	Use of This Standard.....x	4.6	Installation.....14
III.A	Purchaser Options and Alternativesx	5	Verification
III.B	Modification to Standard.....xi	5.1	Inspection16
IV	Major Revisions.....xi	5.2	Test Procedures16
V	Commentsxii	6	Delivery
<i>Standard</i>		6.1	Marking.....17
1	General	6.2	Shipment.....17
1.1	Scope1	6.3	Affidavit of Compliance17
1.2	Purpose1	<i>Appendix</i>	
1.3	Application.....1	A	Force Required to Actuate Cast-Iron Slide Gate.....19
2	References.....2		

This page intentionally blank.

Foreword

This foreword is for information only and is not a part of ANSI/AWWA C560.*

I. Introduction.

I.A. *Background.* A cast-iron slide gate is a cast-iron or cast-ductile-iron, vertically sliding gate with metal (usually bronze or stainless-steel) seating faces and adjustable metal (usually bronze or stainless-steel) wedges. The slide gate consists of a self-contained frame or nonself-contained frame and a slide. Examples of where this type of gate is used include the control of water and wastewater through orifice openings in walls, at the ends of pipes, at the ends of open-top channels, or within open-top channels and controlling flow at openings in tank walls. Downward-opening gates act as weir gates. Slide gates are raised and lowered by means of a stem or rod using a manually operated screw stem actuator, an electrically driven screw stem actuator, or by a hydraulic or pneumatic cylinder. Gates are mounted directly to concrete walls with anchor bolts and leveling grout, or grouted into blockouts within concrete channel walls, or bolted to a pipe flange or wall thimble. Other terms used to describe slide gates include *penstocks* and *sluice gates*.

The term *slide gate* has been adopted for use by this series of standards, which supersede ANSI/AWWA C501-92.

ANSI/AWWA C560—Cast-Iron Slide Gates

ANSI/AWWA C561—Fabricated Stainless-Steel Slide Gates

ANSI/AWWA C562—Fabricated Aluminum Slide Gates

ANSI/AWWA C563—Fabricated Composite Slide Gates

The slide gates represented by ANSI/AWWA C560 through ANSI/AWWA C563 differ in material and means of sealing between the slide and the fixed frame as described below.

ANSI/AWWA C560 gates have a cast-iron or cast-ductile-iron slide and frame with machined metal seating faces and wedges to force the slide to seal between the seating faces on the slide and frame.

ANSI/AWWA C561 gates have a fabricated, reinforced stainless-steel slide and frame with ultra high molecular weight (UHMW) polyethylene seating faces and seals or UHMW polyethylene seating faces and resilient rubber seals.

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

ANSI/AWWA C562 gates have a fabricated, reinforced aluminum slide and frame with UHMW polyethylene seating faces and seals or UHMW polyethylene seating faces and resilient rubber seals.

ANSI/AWWA C563 gates have fiberglass reinforced composite-plastic or rigid compressed plastic slides and frames of either fiberglass reinforced composite plastic, stainless steel, or coated carbon steel, with UHMW polyethylene seating faces and resilient rubber seals.

I.B. *History.* The original AWWA standard for slide gates (then referred to as sluice gates) was approved as tentative on June 26, 1941, and described cast-iron gates. The tentative standard was revised and approved on June 4, 1967, as AWWA C501. Subsequent editions were approved in January 1980, June 1987, and June 1992. Following the latest revision, the Standards Council authorized the development of additional standards for slide gates to recognize the widespread use of slide gates similar to ANSI/AWWA C501 gates in performance but manufactured by different methods and of different materials. For consistency among the new standards and recognizing the new designs employed, the Standards Council directed that each of the standards use the name *slide gate* in lieu of the term *sluice gate*. The Standards Council also directed that ANSI/AWWA C501 be redesignated ANSI/AWWA C560, with subsequent slide gate standards numbered consecutively. Subsequent revisions of the standard were approved as ANSI/AWWA C560 on June 11, 2000, and on June 24, 2007. This edition was approved on Jan. 19, 2014.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the American Water Works Association Research Foundation (AwwaRF, now Water Research Foundation*) and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.† Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health

* Water Research Foundation, 6666 W. Quincy Avenue, Denver, CO 80235.

† Persons outside the United States should contact the appropriate authority having jurisdiction.

effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. An advisory program formerly administered by USEPA, Office of Drinking Water, discontinued on Apr. 7, 1990.
2. Specific policies of the state or local agency.
3. Two standards developed under the direction of NSF,* NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.
4. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,[†] and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdiction. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA C560 does not address additives requirements. Thus, users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

II. Special Issues. During the revision of this standard the issue of critical buckling of the gate stem was discussed. This resulted in the design load stipulated in 4.4.11.2 changing from the rated output to the extreme output of the actuator. The intent of this was to prevent stem failure. However, it is common to provide gates with actuators sized for modulating conditions and those actuators have higher-powered

* NSF International, 789 N. Dixboro Road, Ann Arbor, MI 48105.

† Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20001.

motors. This may result in disproportionately large shafts. The user is cautioned that rated output may be more appropriate depending on the features specified with the actuator.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following items shall be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA C560, Cast-Iron Slide Gates, of latest revision.
2. Whether compliance with NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, is required.
3. Number of units required.
4. Type of closure—conventional or flush-bottom.
 - a. Size—by width and by height of clear opening.
5. Design head measured from surface of water to centerline of gate, in ft (m), for the following:
 - a. Seating head.
 - b. Unseating head.
6. Operating head measured from surface of water to centerline of gate, in ft (m), in both seating and unseating conditions.
7. Type of lift actuator—manual, electric-motor-driven, or hydraulic/pneumatic-cylinder. If electric-motor-driven or hydraulic/pneumatic-cylinder, the purchaser should refer to ANSI/AWWA C542, Electric Motor Actuators for Valves and Slide Gates, or ANSI/AWWA C541, Hydraulic and Pneumatic Cylinder and Vane-Type Actuators for Valves and Slide Gates, of latest revision.
8. Conventional mounted frame or self-contained thrust reaction frame.
9. Upward- or downward-opening gate. NOTE: If a downward gate is required for skimming only, make manufacturer aware.
10. If hydraulic or pneumatic actuators are specified, provide cylinder operating media and pressure (refer to ANSI/AWWA C541 of latest revision).
11. Definition of any special design and construction required for conditions beyond the scope of this standard, such as throttling service, environmental conditions, sediment, or grit exposure, and intended operation frequency and duration.
12. Frequency of operation and special operating conditions, such as ice formation.

13. An installation requirement drawing showing clearances, wall and floor thicknesses, details of wall pipe and thimble installation, and location of actuator.
14. Details of other federal, state or provincial, and local requirements (Section 4).
15. Any drawings and material specifications required of the supplier or of the manufacturer (Sec. 4.1 and 4.2).
16. If test records must be viewed (Sec. 4.3.2).
17. Acceptable materials (Sec. 4.3.3).
18. If seals, separate from seats, are to be provided (Sec. 4.3.3.8).
19. Rising stem or nonrising stem (Sec. 4.4.7 and 4.4.11).
20. Type of gate mounting used: If wall thimble is used, required length and shapes (Sec. 4.4.10).
21. Omission of stem covers (Sec. 4.4.13.6), if not required.
22. Omission of position indicator (Sec 4.4.13.7), if not required.
23. If an actuator stand is needed (Sec. 4.4.14).
24. If corrosion-resistant tongue covers/guide liners are to be provided (Sec 4.5.2.2).
25. Weld inspections, if required.
26. Leakage tests in the shop (Sec. 5.2.1.3) and in the field (Sec. 5.2.2), if required.
27. Consultation with manufacturer on leakage rates less than those specified (Sec. 5.2.2.2).
28. Inspection by purchaser, if required (Sec. 5.1).
29. Separate shipment of embedded items (Sec. 6.2).
30. Affidavit of compliance (Sec. 6.3), if required.

III.B. *Modification to Standard.* Any modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

IV. Major Revisions. Major revisions made to the standard in this revision include the following:

1. The foreword was updated to bring consistency among the four slide-gate standards: Fabricated Stainless Steel, Fabricated Aluminum, Fabricated Composite, and Cast Iron.
2. Wastewater considerations were included where applicable.
3. Section 4: Requirements, was extensively updated to read identically among the four slide-gate standards except where materially different.
4. Tensile, compressive, and critical buckling loads were readdressed and language clarified. The definitions of rated and extreme outputs for manual, electric, and hydraulic/pneumatic actuators are added.

5. Maximum pressure velocity factors under defined operating conditions (modulating open/close) were added to the general design along with new language for lift nut requirements, specifically pressure on the thread contact area and the ratio of the lift nut length to the diameter of the stem.

6. Design loads for stem-guided components are added.

V. Comments. If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603, write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098, or email at standards@awwa.org.



**American Water Works
Association**

Dedicated to the World's Most Important Resource™

ANSI/AWWA C560-14
(Revision of ANSI/AWWA C560-07)

AWWA Standard

Cast-Iron Slide Gates

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes vertically mounted, cast-iron slide gates with full aperture closing, designed for either seating head, unseating head, or both, in ordinary water-supply and wastewater service. The gates are primarily used to shut off or throttle water or wastewater flow through a rectangular or round orifice, end of channel, or in-channel opening. The gates may be either conventional-closure or the flush-bottom-closure type and may open upward or downward. This standard also describes manual slide gate actuator mechanisms together with standard accessories. Power actuated mechanisms (including electric, hydraulic, or pneumatic) are described in ANSI/AWWA C541 and ANSI/AWWA C542.

Sec. 1.2 Purpose

The purpose of this standard is to provide the minimum requirements for cast-iron slide gates, including materials, general design, manufacture, testing, inspection, and shipment.

Sec. 1.3 Application

This standard can be referenced for purchasing and receiving cast-iron slide gates and can also be used as a guide for designing and manufacturing cast-iron slide gates. The stipulations of this standard apply when this document has been