



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource™*

**ANSI/AWWA C702-15**  
(Revision of ANSI/AWWA C702-10)

**AWWA Standard**

# Cold-Water Meters— Compound Type

Effective date: Apr. 1, 2015.

First edition approved by AWWA Board of Directors May 24, 1923.

This edition approved Jan. 24, 2015.

Approved by American National Standards Institute Oct. 16, 2014.




## AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water supply industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal - American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal - American Water Works Association* publication of the official notice.

## American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900, or emailing [info@ansi.org](mailto:info@ansi.org).

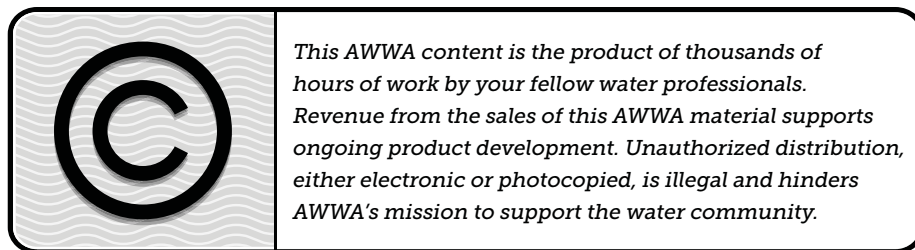

ISBN-13, print: 978-1-62576-054-8

eISBN-13, electronic: 978-1-61300-316-9

DOI: <http://dx.doi.org/10.12999/AWWA.C702.15>

---

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2015 by American Water Works Association  
Printed in USA

## Committee Personnel

The AWWA Subcommittee on Compound and Fire-Service Meters, which developed this standard, had the following personnel at the time:

Joe Alongi, *Chair*

J. Alongi, Kansas City Water Services Department, Kansas City, Mo.	(AWWA)
M.J. Aragon, Denver Water, Denver, Colo.	(AWWA)
R.A. Barillas, Badger Meter, Milwaukee, Wis.	(AWWA)
M.C. Bowen, City of Columbus, Division of Water, Columbus, Ohio	(AWWA)
D. Casper, Mueller Systems, Cleveland, S.C.	(AWWA)
G.H. De Jarlais, Badger Meter, Milwaukee, Wis.	(AWWA)
A. Dudley, Itron, West Union, S.C.	(AWWA)
D. Faber, Faber & Associates, Columbus, Ind.	(AWWA)
L. Gregory, RG3 Meter Company, Longview, Texas	(AWWA)
A. Hendey Sr., Hendey Meter, Beaumont, Calif.	(AWWA)
D.E. Hood, M.E. Simpson Company Inc., Valparaiso, Ind.	(AWWA)
R.N. Koch, Master Meter Inc., Pittsburgh, Pa.	(AWWA)
D.J. Kullmann, Neptune Technology Group Inc., Marietta, Ga.	(AWWA)
J. Pintok, RG3 Meter Company, Sanford, Fla.	(AWWA)
J.A. Reiss, Elster AMCO Water LLC, Ocala, Fla.	(AWWA)
J.R. Scarborough III, Neptune Technology Group Inc., Tallassee, Ala.	(AWWA)
T. Smith, Sensus, Raleigh, N.C.	(AWWA)
S.M. Swanson, Sensus, Uniontown, Pa.	(AWWA)
M.A. Thomas, Mueller Systems, Cleveland, S.C.	(AWWA)
W.J. Vetter, Master Meter Inc., Mansfield, Texas	(AWWA)
A.M. Watson, Elster AMCO Water LLC, Ocala, Fla.	(AWWA)

The AWWA Standards Committee on Water Meters, which reviewed and approved this standard, had the following personnel at the time of approval:

Thomas A. Kelly Jr., *Chair*

Michael L. Mastic, *Secretary*

*General Interest Members*

D. Faber, Faber & Associates, Columbus, Ind.	(AWWA)
R.C. Graff, Poway, Calif.	(AWWA)

D.E. Hood, M.E. Simpson Company Inc., Valparaiso, Ind.	(AWWA)
M.C. Johnson, Utah State University, Logan, Utah	(AWWA)
M.J. Kebles, Water Industry Consultant, Las Vegas, Nev.	(AWWA)
F.S. Kurtz,* Standards Engineer Liaison, AWWA, Denver, Colo.	(AWWA)
M.L. Mastic,† MARS Company, Ocala, Fla.	(AWWA)
R.A. Richter, National Institute of Standards and Technology, Gaithersburg, Md.	(AWWA)
F.S. Salser Jr., Floyd S. Salser Jr. & Associates MARS Company, Ocala, Fla.	(AWWA)
R. San Giacomo, R & D Engineering P.C., Orchard Park, N.Y.	(AWWA)
J.A. Welsh, Measurement Canada, Ottawa, Ont., Canada	(AWWA)

*Producer Members*

F.J. Begale,† Badger Meter, Milwaukee, Wis.	(AWWA)
T.D. Bianchi,† Neptune Technology Group Inc., Tallassee, Ala.	(AWWA)
D. Casper,† Mueller Systems, Cleveland, S.C.	(AWWA)
G.H. De Jarlais, Badger Meter, Milwaukee, Wis.	(AWWA)
A. Dudley, Itron, West Union, S.C.	(AWWA)
L. Gregory, RG3 Meter Company Inc., Longview, Texas	(AWWA)
A. Hendey Sr., Hendey Meter, Beaumont, Calif.	(AWWA)
M.J. Keilty, Endress + Hauser Flowtec AG, Estes Park, Colo.	(AWWA)
R.N. Koch, Master Meter Inc., Pittsburgh, Pa.	(AWWA)
D.J. Kullmann, Neptune Technology Group Inc., Marietta, Ga.	(AWWA)
M. Laird,† Metron-Farnier LLC, Boulder, Colo.	(AWWA)
J.F. Panek Jr., McCrometer Inc., Rowley, Iowa	(AWWA)
J. Pintok,† RG3 Meter Company Inc., Sanford, Fla.	(AWWA)
J.A. Reiss,† Elster AMCO Water LLC, Ocala, Fla.	(AWWA)
M. Shamley, Metron-Farnier LLC, Boulder, Colo.	(AWWA)
T. Smith,† Sensus, Raleigh, N.C.	(AWWA)
S.M. Swanson, Sensus, Uniontown, Pa.	(AWWA)
M.A. Thomas, Mueller Systems, Cleveland, N.C.	(AWWA)
W.J. Vetter,† Master Meter Inc., Mansfield, Texas	(AWWA)
G.M. Voss,† McCrometer Inc., Hemet, Calif.	(AWWA)
A.M. Watson, Elster AMCO Water LLC, Ocala, Fla.	(AWWA)

---

\* Liaison, nonvoting

† Alternate

*User Members*

M.L. Aigen, Boston Water and Sewer Commission, Roxbury, Mass.	(NEWWA)
J. Alongi, Kansas City Water Services Department, Kansas City, Mo.	(AWWA)
M.J. Aragon, Denver Water, Denver, Colo.	(AWWA)
M.C. Bowen, City of Columbus, Division of Water, Columbus, Ohio	(AWWA)
W.F. Dunnill, Consolidated Utility District of Rutherford County, Murfreesboro, Tenn.	(AWWA)
W.M. Garfield, Arizona Water Company, Phoenix, Ariz.	(AWWA)
D. Griffin, City of Winnipeg Water and Waste Department, Winnipeg, Man., Canada	(AWWA)
P.A. Hayes, Mammoth Community Water District, Mammoth Lakes, Calif.	(AWWA)
N.D. Kaufman, Truckee Donner Public Utility District, Truckee, Calif.	(AWWA)
T.A. Kelly Jr., Washington Suburban Sanitary Commission, Laurel, Md.	(AWWA)
M.S. Krause, Desert Water Agency, Palm Springs, Calif.	(AWWA)
A. Land, Dallas Water Utilities, Dallas, Texas	(AWWA)
S.U. Mills-Wright,* Standards Council Liaison, City of Arlington, Arlington, Texas	(AWWA)
K.C. Molli, Veolia Water North America, Chicago, Ill.	(AWWA)
J.A. Novak, Milwaukee Water Works, Milwaukee, Wis.	(AWWA)
J.H. Standi Jr., Golden State Water Company, Fontana, Calif.	(AWWA)

---

\* Liaison, nonvoting

This page intentionally blank.

# Contents

*All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.*

SEC.	PAGE	SEC.	PAGE
<b>Foreword</b>		<b>6 Delivery</b>	
I	ix	6.1	15
I.A	ix	6.2	15
I.B	ix	6.3	15
I.C	ix		
II	xi	<b>Appendix</b>	
III	xi	<b>A Supplemental Information</b>	
III.A	xi	A.1	17
	xi	A.2	17
III.B	xii	A.3	17
IV	xii	A.4	18
V	xiii	A.5	19
		A.6	21
		A.7	21
		A.8	22
		A.9	22
<b>Standard</b>		<b>Tables</b>	
<b>1 General</b>		1	8
1.1	1	2	8
1.2	1	3	9
1.3	1	4	10
<b>2 References</b>	2	5	11
<b>3 Definitions</b>	4	A.1	21
<b>4 Requirements</b>			
4.1	4		
4.2	8		
4.3	9		
<b>5 Verification</b>			
5.1	14		

This page intentionally blank.

## Foreword

*This foreword is for information only and is not a part of ANSI\*AWWA C702.*

### **I. Introduction.**

I.A. *Background.* The first compound-type water meter was developed in 1914, when it became evident that there was a need for a measuring device combining a valve with a small displacement-type bypass meter. The new meter would, by design, divert and register water at flow rates below the minimum flow-rate capability of the main water-line meter, which was usually of the turbine type.

Initially, standard meters of the turbine type and displacement type were assembled into units with suitable valves. Mainline meter cases were first made of cast iron, but after five or six years, some were made of bronze. In the field, meters were also converted to the compound type by the attachment of bypass meters and diversion valves.

Currently, some compound-type meters are made almost entirely of bronze in single mainline cases. Others continue to be constructed with cast-iron cases. Some compound-type meters are assembled units, particularly those in large sizes. Compound-type meters have applications in commercial, industrial, and institutional services where wide ranges of flow rates are encountered.

I.B. *History.* The first standard that covered compound-type meters was adopted by the New England Water Works Association (NEWWA) in March 1923, and by the American Water Works Association (AWWA) on May 24, 1923. On Jan. 14, 1946, the standard was approved as tentative as AWWA 7M.3-T. On July 25, 1947, the standard was approved under the designation 7M.3-1947/C702-47. Subsequent editions of the standard were approved by the AWWA Board of Directors on Jan. 26, 1970; Jan. 28, 1978; June 22, 1986; June 18, 1992; Jan. 21, 2001; and Jan. 17, 2010. This edition was approved on Jan. 24, 2015.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). The

---

\* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.\* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. An advisory program formerly administered by USEPA, Office of Drinking Water, discontinued on Apr. 7, 1990.
2. Specific policies of the state or local agency.
3. Two standards developed under the direction of NSF:† NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.
4. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,‡ and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

In an alternative approach to inadvertent drinking water additives, some jurisdictions (including California, Louisiana, Maryland, and Vermont at the time of this writing) are calling for reduced lead limits for materials in contact with potable water. Various third-party certifiers have been assessing products against these lead content

---

\* Persons outside the United States should contact the appropriate authority having jurisdiction.

† NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

‡ Both publications available from National Academy of Sciences, 500 Fifth Street, N.W., Washington, DC 20001.

criteria, and a new ANSI-approved national standard, NSF/ANSI 372, Drinking Water System Components—Lead Content, was published in 2010.

On Jan. 4, 2011, legislation was signed revising the definition for “lead free” within the Safe Drinking Water Act (SDWA) as it pertains to “pipe, pipe fittings, plumbing fittings, and fixtures.” The changes went into effect on Jan. 4, 2014. In brief, the new provisions to the SDWA require that these products meet a weighted average lead content of not more than 0.25 percent.

ANSI/AWWA C702 does not address additives requirements. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

**II. Special Issues.** This standard has no applicable information for this section.

**III. Use of This Standard.** It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

**III.A. Purchaser Options and Alternatives.** The following information should be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA C702, Cold-Water Meters—Compound Type, of latest edition.
2. Whether compliance with NSF/ANSI 61, Drinking Water System Components—Health Effects; NSF/ANSI 372, Drinking Water System Components—Lead Content; or an alternative lead content criterion is required.
3. If specific warranty provisions will be required.
4. Limitations on acceptable materials, if any, as referenced throughout Sec. 4.1.
5. Details of other federal, state or provincial, and local requirements (Sec. 4.1).
6. Restrictions on corrosion-resistance treatment process (Sec. 4.1.8), if any.
7. Sizes of meters (Sec. 4.2.1) and quantity required.
8. Length of filler piece (Sec. 4.2.3) if required.
9. Modifications to test specifications (Sec. 4.2.6) if operating water temperatures will exceed 80°F (27°C) (Sec. A.5.2).
10. Round or oval flanges on 2-in. (50-mm) meters (Sec. 4.3.3.1).
11. If companion flanges, gaskets, bolts, and nuts (Sec. 4.3.4) are to be provided, and designation of flange material (Sec. 4.1.9) if other than cast iron is desired.

12. If main casing is to be provided with tapped boss for field-testing purposes (Sec. 4.3.5).

13. Details of register to be provided: US gallons, cubic feet, or cubic meters; with or without center-sweep test hand; open, sealed, or permanently sealed (Sec. 4.3.6).

14. If an encoder-type register, direct-reading remote register, or an adapter (Sec. 4.3.7) is required.

15. If meters are to be provided with strainers (Sec. 4.3.14). If strainers are requested, specify whether they are internal or external and whether the strainer shall be removable without removing the meter from the service line.

16. Whether the meter serial number is to be imprinted on the main case (Sec. 6.1).

17. If an affidavit of compliance (Sec. 6.3), a certificate of testing accuracy (Sec. A.3.3), or both are to be provided.

18. Special materials required, if any, to resist corrosion if water is highly aggressive (Sec. A.5.3).

III.B. *Modification to Standard.* Any modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

**IV. Major Revisions.** The major revisions to the standard in this edition include the following:

1. Class I compound meters have been removed from the standard.

2. Foreword Sec. I.C provides information on lead content criteria and on new NSF/ANSI Standard 372, Drinking Water System Components—Lead Content, as well as on recent federal legislation revising the definition of “lead free” in the SDWA.

3. Foreword Sec. III.A contains a new purchaser option for compliance with NSF/AWWA 372 or other lead content criterion.

4. In Section 3, the definition of “class I meter” has been removed. The definition of “manufacturer” has been changed to include the party that supplies the product marked with its brand name.

5. In Section 4, the materials have been updated in response to legislation revising the definition of “lead free” in the SDWA. Stainless steel has been added as a material for meter and strainer main casings (Sec. 4.1.2), measuring cages or chambers (Sec. 4.1.4), companion flanges (Sec. 4.1.9), and automatic valves (Sec. 4.1.10).

6. Sec. 4.3.6.3 has been expanded to include more comprehensive language and greater details on the requirements for electronic display registers.

7. Editorial clarifications have been provided throughout the standard.

**V. Comments.** If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at [standards@awwa.org](mailto:standards@awwa.org).

This page intentionally blank.



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource™*

**ANSI/AWWA C702-15**  
(Revision of ANSI/AWWA C702-10)

**AWWA Standard**

---

# Cold-Water Meters—Compound Type

---

## SECTION 1: GENERAL

---

### **Sec. 1.1 Scope**

This standard describes the various types and classes of cold-water compound-type meters in sizes 2 in. (50 mm) through 8 in. (200 mm), and the materials and workmanship used in their fabrication. Compound meters shall consist of a combination of a turbine-type mainline meter for measuring high rates of flow and a bypass meter of an appropriate size for measuring low rates of flow. The compound meter shall have an automatic valve mechanism for diverting low rates of flow through the bypass meter.

### **Sec. 1.2 Purpose**

The purpose of this standard is to provide the minimum requirements for compound-type cold-water meters, including materials and design.

### **Sec. 1.3 Application**

This standard can be referenced in specifications for purchasing and receiving compound-type cold-water meters. This standard can be used as a guide for manufacturing this type of meter. The stipulations of this standard apply when this document has been referenced, and then only to compound-type cold-water meters.