



**American Water Works
Association**

Dedicated to the World's Most Important Resource™

ANSI/AWWA C704-15
(Revision of ANSI/AWWA C704-12)

AWWA Standard

Propeller-Type Meters for Waterworks Applications

Effective date: Apr. 1, 2015.

First edition approved by AWWA Board of Directors July 21, 1949.

This edition approved Jan. 24, 2015.

Approved by American National Standards Institute Oct. 16, 2014.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water supply industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal - American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal - American Water Works Association* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900, or emailing info@ansi.org.

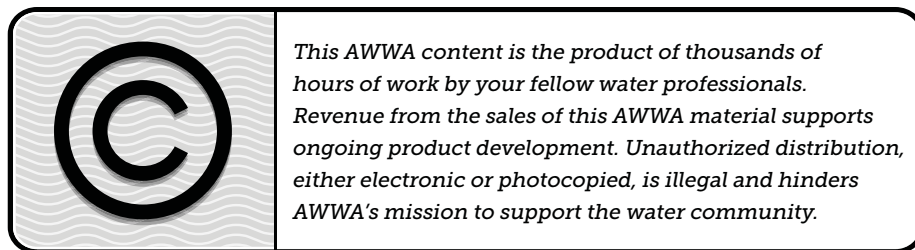

ISBN-13, print: 978-1-62576-056-2

eISBN-13, electronic: 978-1-61300-318-3

DOI: <http://dx.doi.org/10.12999/AWWA.C704.15>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2015 by American Water Works Association
Printed in USA

Committee Personnel

The AWWA Subcommittee on Current-Type Meters, which developed this standard, had the following personnel at the time:

Donald J. Kullmann, *Chair*

R.A. Barillas, Badger Meter, Milwaukee, Wis.	(AWWA)
M.C. Bowen, City of Columbus, Division of Water, Columbus, Ohio	(AWWA)
D. Casper, Mueller Systems, Cleveland, S.C.	(AWWA)
G.H. De Jarlais, Badger Meter, Milwaukee, Wis.	(AWWA)
A. Dudley, Itron, West Union, S.C.	(AWWA)
D.E. Hood, M.E. Simpson Company Inc., Valparaiso, Ind.	(AWWA)
R.N. Koch, Master Meter Inc., Pittsburgh, Pa.	(AWWA)
D.J. Kullmann, Neptune Technology Group Inc., Marietta, Ga.	(AWWA)
J.F. Panek Jr., McCrometer Inc., Rowley, Iowa	(AWWA)
J.A. Reiss, Elster AMCO Water LLC, Ocala, Fla.	(AWWA)
J.R. Scarborough III, Neptune Technology Group Inc., Tallassee, Ala.	(AWWA)
T. Smith, Sensus, Raleigh, N.C.	(AWWA)
S.M. Swanson, Sensus, Uniontown, Pa.	(AWWA)
W.J. Vetter, Master Meter Inc., Mansfield, Texas	(AWWA)
A.M. Watson, Elster AMCO Water LLC, Ocala, Fla.	(AWWA)

The AWWA Standards Committee on Water Meters, which reviewed and approved this standard, had the following personnel at the time of approval:

Thomas A. Kelly Jr., *Chair*

Michael L. Mastic, *Secretary*

General Interest Members

D. Faber, Faber & Associates, Columbus, Ind.	(AWWA)
R.C. Graff, Poway, Calif.	(AWWA)
D.E. Hood, M.E. Simpson Company Inc., Valparaiso, Ind.	(AWWA)
M.C. Johnson, Utah State University, Logan, Utah	(AWWA)
M.J. Kebles, Water Industry Consultant, Las Vegas, Nev.	(AWWA)

F.S. Kurtz,* Standards Engineer Liaison, AWWA, Denver, Colo.	(AWWA)
M.L. Mastic,† MARS Company, Ocala, Fla.	(AWWA)
R.A. Richter, National Institute of Standards and Technology, Gaithersburg, Md.	(AWWA)
F.S. Salser Jr., Floyd S. Salser Jr. & Associates MARS Company, Ocala, Fla.	(AWWA)
R. San Giacomo, R & D Engineering P.C., Orchard Park, N.Y.	(AWWA)
J.A. Welsh, Measurement Canada, Ottawa, Ont., Canada	(AWWA)

Producer Members

F.J. Begale,† Badger Meter, Milwaukee, Wis.	(AWWA)
T.D. Bianchi,† Neptune Technology Group Inc., Tallassee, Ala.	(AWWA)
D. Casper,† Mueller Systems, Cleveland, S.C.	(AWWA)
G.H. De Jarlais, Badger Meter, Milwaukee, Wis.	(AWWA)
A. Dudley, Itron, West Union, S.C.	(AWWA)
L. Gregory, RG3 Meter Company Inc., Longview, Texas	(AWWA)
A. Hendey Sr., Hendey Meter, Beaumont, Calif.	(AWWA)
M.J. Keilty, Endress + Hauser Flowtec AG, Estes Park, Colo.	(AWWA)
R.N. Koch, Master Meter Inc., Pittsburgh, Pa.	(AWWA)
D.J. Kullmann, Neptune Technology Group Inc., Marietta, Ga.	(AWWA)
M. Laird,† Metron-Farnier LLC, Boulder, Colo.	(AWWA)
J. Panek Jr., McCrometer Inc., Rowley, Iowa	(AWWA)
J. Pintok,† RG3 Meter Company Inc., Sanford, Fla.	(AWWA)
J.A. Reiss,† Elster AMCO Water LLC, Ocala, Fla.	(AWWA)
M. Shamley, Metron-Farnier LLC, Boulder, Colo.	(AWWA)
T. Smith,† Sensus, Raleigh, N.C.	(AWWA)
S.M. Swanson, Sensus, Uniontown, Pa.	(AWWA)
M.A. Thomas, Mueller Systems, Cleveland, N.C.	(AWWA)
W.J. Vetter,† Master Meter Inc., Mansfield, Texas	(AWWA)
G.M. Voss,† McCrometer Inc., Hemet, Calif.	(AWWA)
A.M. Watson, Elster AMCO Water LLC, Ocala, Fla.	(AWWA)

User Members

M.L. Aigen, Boston Water and Sewer Commission, Roxbury, Mass.	(NEWWA)
J. Alongi, Kansas City Water Services Department, Kansas City, Mo.	(AWWA)

* Liaison, nonvoting

† Alternate

M.J. Aragon, Denver Water, Denver, Colo.	(AWWA)
M.C. Bowen, City of Columbus, Division of Water, Columbus, Ohio	(AWWA)
W.F. Dunnill, Consolidated Utility District of Rutherford County, Murfreesboro, Tenn.	(AWWA)
W.M. Garfield, Arizona Water Company, Phoenix, Ariz.	(AWWA)
D. Griffin, City of Winnipeg Water and Waste Department, Winnipeg, Man., Canada	(AWWA)
P.A. Hayes, Mammoth Community Water District, Mammoth Lakes, Calif.	(AWWA)
N.D. Kaufman, Truckee Donner Public Utility District, Truckee, Calif.	(AWWA)
T.A. Kelly Jr., Washington Suburban Sanitary Commission, Laurel, Md.	(AWWA)
M.S. Krause, Desert Water Agency, Palm Springs, Calif.	(AWWA)
A. Land, Dallas Water Utilities, Dallas, Texas	(AWWA)
S.U. Mills-Wright,* Standards Council Liaison, City of Arlington, Arlington, Texas	(AWWA)
K.C. Molli, Veolia Water North America, Chicago, Ill.	(AWWA)
J.A. Novak, Milwaukee Water Works, Milwaukee, Wis.	(AWWA)
J.H. Standi Jr., Golden State Water Company, Fontana, Calif.	(AWWA)

* Liaison, nonvoting

This page intentionally blank.

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword		6 Delivery	
I	Introduction.....ix	6.1	Marking..... 14
I.A	Background.....ix	6.2	Packaging and Shipping 14
I.B	History.....ix	6.3	Affidavit of Compliance 14
I.C	Acceptance.....x	Appendix	
II	Special Issues.....xi	A Supplemental Information	
III	Use of This Standardxi	A.1	Units of Measurement 15
III.A	Purchaser Options and Alternativesxi	A.2	Register Types 15
III.B	Modification to Standardxii	A.3	Tests..... 15
IV	Major Revisions.....xii	A.4	Testing Equipment..... 17
V	Commentsxii	A.5	Registration Accuracy 17
Standard		A.6	Periodic Tests 19
1 General		A.7	Meter Storage..... 19
1.1	Scope1	A.8	Placing Meter in Service.....20
1.2	Purpose1	Tables	
1.3	Application.....1	1	Operating Characteristics.....7
2 References2		2	Propeller-Meter Dimensions8
3 Definitions4		3	Main-Case Connections or Meter Installation Types..... 10
4 Requirements		4	Companion Flange Dimensions 11
4.1	Materials4	5	Maximum Indication on Initial Dial And Minimum Register Capacity..... 12
4.2	General Design6	A.1	Average Recommended Intervals Between Meter Tests 19
4.3	Detailed Design9		
5 Verification			
5.1	Basis for Rejection 13		

This page intentionally blank.

Foreword

*This foreword is for information only and is not a part of ANSI*AWWA C704.*

I. Introduction.

I.A. *Background.* Current-type water meters were first developed for measuring flowing air and water. A booklet published in Hamburg, Germany, in 1790 by Benjamin Gottlob Hoffman described a form of current meter developed by Reinhard Woltmann, which seems to have been the first practical meter for this purpose. It was originally developed to measure stream flow and was not considered adaptable for use in a closed pipe. Since then, current meters have changed materially in design, construction, and use and have been adapted for closed pipelines.

I.B. *History.* The first effort to standardize current-type meters for customer service in the United States resulted in the formulation of AWWA Standard Specifications for Cold-Water Meters—Current Type, in 1923. These were revised on July 25, 1947, as AWWA C701-47, Standard Specifications for Cold-Water Meters—Current Type. During the period between 1923 and 1947, a different version of current-type meters was developed for use in special applications, such as pump station discharge and main line measurement. The original design for use in customer service lines contains a removable measuring cage in which a turbine operates, and the special applications meters do not. Instead, a propeller operates either directly within the pipeline itself or within the main meter body. This change in design results in differences in operating ranges, friction losses, and capacities of the two types. Because of development of this second type of propeller meter, AWWA Specification for Current-Type Meters—Propeller Drive, C704, was adopted as tentative in 1949 and was made a standard on May 25, 1950.

Confusion results from having two standards for what is essentially the same type of meter, and considerable judgment is required in the selection of one or the other. In the 1970 revisions of ANSI/AWWA C701 and ANSI/AWWA C704, the AWWA Meter Committee attempted to make the two standards more compatible in order to better assist the user in selection. Other revisions of C704 were approved by the AWWA Board of Directors on Jan. 26, 1975; Jan. 29, 1984; Jan. 26, 1992; June 16, 2002; Jan. 27, 2008; and June 10, 2012. This edition was approved on Jan. 24, 2015.

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. An advisory program formerly administered by USEPA, Office of Drinking Water, discontinued on Apr. 7, 1990.
2. Specific policies of the state or local agency.
3. Two standards developed under the direction of NSF:† NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.
4. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,‡ and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

* Persons outside the United States should contact the appropriate authority having jurisdiction.

† NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

‡ Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20001.

In an alternative approach to inadvertent drinking water additives, some jurisdictions (including California, Louisiana, Maryland, and Vermont, at the time of this writing) are calling for reduced lead limits for materials in contact with potable water. Various third-party certifiers have been assessing products against these lead content criteria, and a new ANSI-approved national standard, NSF/ANSI 372, Drinking Water System Components—Lead Content, was published in 2010.

On Jan. 4, 2011, legislation was signed revising the definition for “lead free” within the Safe Drinking Water Act (SDWA) as it pertains to “pipe, pipe fittings, plumbing fittings, and fixtures.” The changes went into effect on Jan. 4, 2014. In brief, the new provisions to the SDWA require that these products meet a weighted average lead content of not more than 0.25 percent.

ANSI/AWWA C704 does not address additives requirements. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

II. Special Issues. The meters described in this standard are not designed to be used in water service piping intended to extinguish fire. Requirements for commercial and industrial applications in this regard are contained in ANSI/AWWA C703. Requirements for meters used for residential fire sprinkler applications that meet the requirements of NFPA* 13D in single- and two-family dwellings and manufactured homes, sizes $\frac{3}{4}$ in. (20 mm) through 2 in. (50 mm), are found in ANSI/AWWA C714.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following information should be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA C704, Propeller-Type Meters for Waterworks Applications, of latest revision.
2. Whether compliance with NSF/ANSI 61, Drinking Water System Components—Health Effects; NSF/ANSI 372, Drinking Water System Components—Lead Content; or an alternative lead content criterion is required.

* National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02169.

3. The modification of registration accuracy if the test water temperature exceeds 100°F (38°C).
4. Details of other federal, state or provincial, and local requirements (Sec. 4.1).
5. Whether the flow tube or main casing is to be cast iron or fabricated steel (Sec. 4.1.2).
6. Size of meter (Sec. 4.2.1) and quantity required.
7. Type of end connections, including threaded, flanged, plain-end, grooved-end, welding-saddle, saddle-type, or fire hydrant connections (Sec. 4.3.2).
8. Whether companion flanges, gaskets, bolts, and nuts (Sec. 4.3.3 and 4.1.8) are to be provided with flanged meters.
9. Whether meters are to be provided with open, sealed, or permanently sealed registers; with units of measure including US gallons, cubic feet, or cubic meters (Sec. 4.3.4); with a center-sweep test hand; or with an instantaneous flow-rate indicator reading US gallons per minute, cubic feet per second, cubic meters per hour, liters per second, or other units.
10. If seal-wire holes are to be omitted (Sec. 4.3.7).
11. If an affidavit of compliance (Sec. 6.3) and certificate of testing for accuracy and capacity (Sec. A.3.3 and A.3.1) from the supplier or manufacturer are required.
12. If water is highly aggressive, whether special materials are required to resist corrosion (Sec. A.5.3).

III.B. *Modification to Standard.* Modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

IV. Major Revisions. The major revisions to the standard in this edition include the following:

1. Foreword Section II provides new information that meters used for residential fire sprinkler applications meeting the requirements of NFPA 13D, sizes $\frac{3}{4}$ in. (20 mm) through 2 in. (50 mm), are found in ANSI/AWWA C714.
2. In Section 3, the definition of “manufacturer” has been changed to include the party that supplies the product marked with its brand name.
3. In Sec. 4.1, the materials have been updated in response to legislation revising the definition of “lead free” in the SDWA.
4. Editorial clarifications have been provided throughout the standard.

V. Comments. If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at standards@awwa.org.



**American Water Works
Association**

Dedicated to the World's Most Important Resource™

ANSI/AWWA C704-15
(Revision of ANSI/AWWA C704-12)

AWWA Standard

Propeller-Type Meters for Waterworks Applications

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes the various types and classes of propeller meters in sizes 2 in. (50 mm) through 72 in. (1,800 mm) for waterworks applications. These meters register by recording the revolutions of a propeller set in motion by the force of flowing water striking the blades.

Sec. 1.2 Purpose

The purpose of this standard is to provide the minimum requirements for propeller-type meters for waterworks applications.

Sec. 1.3 Application

This standard can be referenced when purchasing and receiving propeller-type meters for waterworks applications. This standard can be used for manufacturing this type of meter. The stipulations of this standard apply when this document has been referenced and then only to propeller-type meters for waterworks applications.