

This is a preview of "AWWA C750-2019". Click here to purchase the full version from the ANSI store.

ANSI/AWWA **C750-19**  
(Revision of ANSI/AWWA C750-16)

AWWA Standard

# Transit-Time Flowmeters in Full Closed Conduits

**Effective date: March 1, 2020.**

First edition approved by Board of Directors June 19, 2003.

This edition approved Oct. 28, 2019.

Approved by American National Standards Institute Sept. 9, 2019.



American Water Works  
Association



This is a preview of "AWWA C750-2019". [Click here to purchase the full version from the ANSI store.](#)


## AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

## American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

**CAUTION NOTICE:** The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900, or e-mailing [info@ansi.org](mailto:info@ansi.org).

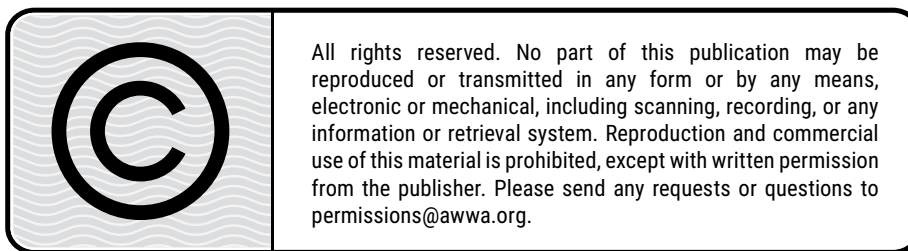

ISBN-13, print: 978-1-62576-368-6

eISBN-13, electronic: 978-1-61300-536-1

DOI: <http://dx.doi.org/10.12999/AWWA.C750.19>

---

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2020 by American Water Works Association  
Printed in USA

## Committee Personnel

The AWWA Subcommittee on Ultrasonic Devices, which developed this standard, had the following personnel at the time:

Jeffrey L. Smith, *Chair*

T.D. Bianchi, Neptune Technology Group, Tallassee, Ala.

S. Carpenter, Wachs Water Services, San Diego, Calif.

A. Dabak, Texas Instruments, Dallas, Tex.

G.H. De Jarlais, Badger Meter, Milwaukee, Wis.

W.F. Dunnill, Consolidated Utility District of Rutherford County, Murfreesboro, Tenn.

D. Faber, Faber & Associates, Columbus, Ind.

J.J. Gemin, AECOM, Kitchener, Ont.

L. Gregory, RG3 Meter Company, Longview, Tex.

P.A. Hayes, Mammoth Community Water District, Mammoth Lakes, Calif.

M.J. Keilty, Endress+Hauser Flowtec AG, Estes Park, Colo.

R.N. Koch, Master Meter Inc., Pittsburgh, Pa.

A. Land, Dallas Water Utilities, Dallas, Tex.

J.A. Olson, Badger Meter, Milwaukee, Wis.

J.E. Pintok, RG3 Meter Company, Lake Mary, Fla.

J.A. Reiss, Elster AMCO Water LLC, Ocala, Fla.

J.R. Scarborough III, Neptune Technology Group, Tallassee, Ala.

S.H. Seehoffer, Master Meter Inc., Mansfield, Tex.

J.L. Smith, Primary Flow Signal Inc., Cranston, R.I.

T. Smith, Sensus, Morrisville, N.C.

S.M. Swanson, Sensus, Uniontown, Pa.

S. Thakurdesai, Texas Instruments, Dallas, Tex.

J.S. Trofatter, Teledyne ISCO, Land O' Lakes, Fla.

J. Van Nostrand, Flexim Americas Corp., Saint Johns, Fla.

A.M. Watson, Elster AMCO Water LLC, Ocala, Fla.

The AWWA Committee on Rate Type Flowmeters, which reviewed and approved this standard, had the following personnel at the time:

Joseph J. Gemin, *Chair*

*General Interest Members*

S. Carpenter, Wachs Water Services, San Diego, Calif.  
J.A. Casados, Instituto Mexicano de Tecnología del Agua, Progreso, Morelos, Mexico  
A. Dabak, Texas Instruments, Dallas, Tex.  
D. Faber, Faber & Associates, Columbus, Ind.  
J.J. Gemin, AECOM, Kitchener, Ont.  
A.M. Horbovetz, M.E. Simpson Company Inc., Valparaiso, Ind.  
M.C. Johnson, Utah Water Research Laboratory, Utah State University, Logan, Utah  
F.S. Kurtz (*liaison, nonvoting*), Standards Engineer Liaison, AWWA, Denver, Colo.  
E.J. Melanson, EJM Automation, Norfolk, Mass.  
R.A. Richter, National Institute of Standards and Technology, Gaithersburg, Md.  
S.F. Sarrouh, T&M Associates, Dublin, Ohio  
S. Thakurdesai (*alternate*), Texas Instruments, Dallas, Tex.

*Producer Members*

R.A. Barillas (*alternate*), Badger Meter, Milwaukee, Wis.  
G.H. De Jarlais, Badger Meter, Milwaukee, Wis.  
M.J. Keilty, Endress+Hauser Flowtec AG, Estes Park, Colo.  
G.G. Land, Master Meter Inc., Mansfield, Texas  
J.A. Reiss, Elster AMCO Water LLC, Ocala, Fla.  
J.L. Smith, Primary Flow Signal Inc., Cranston, R.I.  
D.C. Wyatt, Wyatt Engineering, Lincoln, R.I.

*User Members*

W.F. Dunnill, Consolidated Utility District of Rutherford County, Murfreesboro, Tenn.  
P.A. Hayes, Mammoth Community Water District, Mammoth Lakes, Calif.  
A. Land, Dallas Water Utilities, Dallas, Tex.  
S.U. Mills-Wright (*liaison, nonvoting*), Standards Council Liaison, Dallas Water Utilities, Dallas, Tex.  
S.Y. Tung, City of Houston, Houston, Tex.  
K. Whitaker, San Diego County Water Authority, San Diego, Calif.

## Contents

*All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.*

SEC.	PAGE	SEC.	PAGE
<b>Foreword</b>			
I	Introduction.....	vii	
I.A	Background.....	vii	
I.B	History.....	vii	
I.C	Acceptance.....	viii	
II	Special Issues.....	ix	
II.A	Chlorine and Chloramine Degradation of Elastomers.....	ix	
III	Use of This Standard.....	x	
III.A	Purchaser Options and Alternatives ...	x	
III.B	Modification to Standard.....	x	
IV	Major Revisions.....	x	
V	Comments.....	x	
<b>Standard</b>			
<b>1</b>	<b>General</b>		
1.1	Scope.....	1	
1.2	Purpose.....	1	
1.3	Application.....	1	
<b>2</b>	<b>References</b> .....	2	
<b>3</b>	<b>Definitions</b> .....	2	
<b>4</b>	<b>Requirements</b>		
4.1	Materials.....	3	
4.2	Principles of Operation.....	4	
4.3	Flowmeter Components.....	4	
4.4	Acoustic Paths.....	5	
4.5	Performance Issues.....	6	
4.6	Impacts on Performance.....	8	
<b>5</b>	<b>Verification</b>		
5.1	Calibration Methods.....	12	
5.2	Field-Verification Techniques.....	14	
5.3	Calibration of Transducers and Electronic Components.....	15	
5.4	Calibration Traceability.....	15	
<b>6</b>	<b>Delivery</b>		
6.1	Markings.....	15	
6.2	Packaging and Shipping.....	15	
6.3	Affidavit of Compliance.....	15	
<b>Appendices</b>			
A	Purchaser Options.....	17	
B	Transit-Time Formulas.....	19	
<b>Figures</b>			
1	Transit-Time Flowmeter.....	4	
2	Wetted and Nonwetted Transducers.....	5	
3	Single-Path and Multipath Meters.....	6	
<b>Tables</b>			
1	Transit-Time Ultrasonic Flowmeter Performance Criteria.....	7	
A.1	Items to Consider in Selecting Transit-Time Flowmeters.....	17	

This is a preview of "AWWA C750-2019". [Click here to purchase the full version from the ANSI store.](#)

This page intentionally blank.

## Foreword

*This foreword is for information only and is not a part of ANSI/AWWA C750.*

### **I. Introduction.**

I.A. *Background.* The first water meter that was produced in the United States is thought to be a positive displacement meter that was fabricated in 1857. Since then, a number of other technologies and designs have been introduced to the water industry, each with its special characteristics. The ultrasonic flowmeter is one of the latest additions to the industry. The use of ultrasonic flowmeters has received wide commercial acceptance since the 1970s. There are currently two distinct types of ultrasonic flowmeters available: Doppler-effect and transit-time. While the Doppler-effect meter is used extensively for water and other liquids containing solid particles, the transit-time ultrasonic flowmeter is receiving increased acceptance in the water industry.

I.B. *History.* In 1985, the American Society of Mechanical Engineers (ASME)<sup>†</sup> published the first standard for the transit-time ultrasonic (transit-time) flowmeters. The needs of the water industry differ, in some respects, from other industries, therefore necessitating the development of an AWWA standard for transit-time flowmeters.

In 1990, the AWWA Standards Committee on Rate Type Flowmeters was formed to develop standards for transit-time meters. The Subcommittee on Ultrasonic Meters was later developed for this purpose. The subcommittee prepared a first draft of the transit-time flowmeter standard in 1992. The first draft was reviewed and commented on by the subcommittee members as well as members of the Rate Type Flowmeter Committee. Subsequent drafts were sent out to a number of transit-time flowmeter manufacturers in 1994 for their review and comments. A 1995 draft addressed these comments, where possible, and was distributed to all who had previously commented on the drafts. A revised draft was presented to the subcommittee in 1995. The subcommittee met in January 1996 to finalize the standard. However, the subcommittee decided that leaving the draft open to the general public for review and comment, before finalizing the standard, would produce a more thorough standard. *Journal AWWA* was considered a suitable medium for reaching the water industry. The subcommittee changed the format of the standard into a *Journal AWWA* article that was published in the July 1997 edition of *Journal AWWA* as a Committee Report. The

---

\* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

† American Society of Mechanical Engineers, Two Park Avenue, New York, NY 10016-5990.

article encouraged the public to comment on the contents of the Committee Report. A few written comments were received and were addressed in developing the final draft of the standard. On Jan. 19, 2003, the standard was approved by the AWWA Board of Directors. Subsequent editions of ANSI/AWWA C750 were approved on Jan. 17, 2010, and Jan. 16, 2016. This edition of the standard was approved on Oct. 28, 2019.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). AWWA and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.\* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.
2. Two standards developed under the direction of NSF<sup>†</sup>: NSF/ANSI/CAN<sup>‡</sup> 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects.
3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,<sup>§</sup> and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI/CAN 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI/CAN 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an

---

\* Persons outside the United States should contact the appropriate authority having jurisdiction.

<sup>†</sup> NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

<sup>‡</sup> Standards Council of Canada, 55 Metcalfe Street, Suite 600, Ottawa, ON K1P 6L5 Canada.

<sup>§</sup> Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20001.



unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

In an alternative approach to inadvertent drinking water additives, some jurisdictions (including California, Louisiana, Maryland, and Vermont, for example) have called for reduced lead limits for materials in contact with potable water. Various third-party certifiers have been assessing products against these lead content criteria, and a new ANSI-approved national standard, NSF/ANSI 372, Drinking Water System Components—Lead Content, was published in 2010.

On Jan. 4, 2011, legislation was signed revising the definition for “lead free” within the Safe Drinking Water Act (SDWA) as it pertains to “pipe, pipe fittings, plumbing fittings, and fixtures.” The changes went into effect on Jan. 4, 2014. In brief, the new provisions to the SDWA require that these products meet a weighted average lead content of not more than 0.25 percent.

ANSI/AWWA C750 does not address additives requirements. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

**II. Special Issues.** This standard is different in format from other AWWA standards that contain specific requirements for material, dimensions, workmanship, and other physical requirements. Different transit-time flowmeters employ different materials and technologies. The software and the electronic components of transit-time flowmeters are generally designed to work with the physical characteristics of each make of the equipment.

**II.A Chlorine and Chloramine Degradation of Elastomers.** The selection of materials is critical for water service and distribution piping in locations where there is a possibility that elastomers will be in contact with chlorine or chloramines. Documented research has shown that elastomers such as gaskets, seals, valve seats, and encapsulations may be degraded when exposed to chlorine or chloramines. The impact of degradation is a function of the type of elastomeric material, chemical concentration, contact surface area, elastomer cross section, and environmental conditions as well as temperature. Careful selection of and specifications for elastomeric materials and the specifics of their applications for each water system component should be considered

to provide long-term usefulness and minimum degradation (swelling, loss of elasticity, or softening) of the elastomer specified.

**III. Use of This Standard.** It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following information should be provided by the purchaser (also refer to Appendix A):

1. Standard used—that is, ANSI/AWWA C750, Transit-Time Flowmeters in Full Closed Conduits, of latest revision.
2. Whether compliance with NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects; NSF/ANSI 372, Drinking Water System Components—Lead Content; or an alternative lead content criterion is required.
3. Details of federal, state, and local requirements (Sec. 4.1).
4. Size of the conduit (Sec. 4.2).
5. Type of transducer (Sec. 4.3.2).
6. Single-path or multipath (Sec. 4.4).
7. Performance requirements (Sec. 4.5).
8. Required accuracy (Sec. 4.5.1).
9. Installation issues (Sec. 4.6.1.4).
10. Affidavit of compliance, if required (Sec. 6.3).

III.B. *Modification to Standard.* Any modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

**IV. Major Revisions.** Major revisions made to the standard in this edition include the following:

1. Obsolete references on the evaluation of the health effects of products and drinking water additives have been removed from the foreword.
2. A number of editorial improvements have been made throughout the document to improve clarity.

**V. Comments.** If you have any comments or questions about this standard, please contact AWWA Engineering and Technical Services at 303.794.7711; FAX at 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at [standards@awwa.org](mailto:standards@awwa.org).



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA C750-19**  
(Revision of ANSI/AWWA C750-16)

**AWWA Standard**

---

# Transit-Time Flowmeters in Full Closed Conduits

---

## SECTION 1: GENERAL

---

### **Sec. 1.1 Scope**

This standard describes transit-time ultrasonic flowmeters for water supply service application in pipes running full. An ultrasonic flowmeter is a meter that uses acoustic energy signals to measure liquid velocity. There are currently two distinct types of ultrasonic flowmeters available: Doppler-effect and transit-time. The Doppler-effect meter is used exclusively for liquids containing solid particles or gases, and the transit-time flowmeter is used in a wide variety of applications in the water industry.

### **Sec. 1.2 Purpose**

The purpose of this standard is to provide the minimum requirements for transit-time flowmeters, including components, performance, calibration, and verification.

### **Sec. 1.3 Application**

Transit-time flowmeters are used in a wide variety of applications, including in raw water, in treated water, and in different stages of the treatment process, such as settled water, supernatant, backwash, and chemical lines. These meters are also used in large-diameter transmission pipelines.