
2017-06-06

Jernbaner – Spor – Skinnebundne konstruktions- og vedligeholdelsesmaskiner - Del 2: Tekniske krav til køretøjets reducerede transportkonfiguration og til arbejdskonfigurationen

Railway applications - Track - Railbound construction and maintenance machines – Part 2: Technical requirements for travelling and working

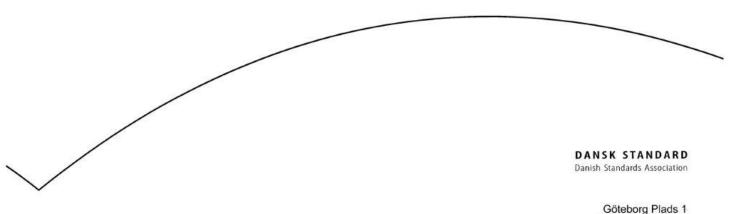

DK-2150 Nordhavn Tel: +45 39 96 61 01 Fax: +45 39 96 61 02

dansk.standard@ds.dk

www.ds.dk

DS projekt. wzoszas ICS: 45.120; 93.100

Første del af denne publikations betegnelse er:

DS/EN, hvilket betyder, at det er en europæisk standard, der har status som dansk standard.

Denne publikations overensstemmelse er:

IDT med: EN 14033-2:2017.

DS-publikationen er på engelsk.

Denne publikation erstatter: DS/EN 14033-2 + A1:2012.

DS-publikationstyper

Dansk Standard udgiver forskellige publikationstyper.

Typen på denne publikation fremgår af forsiden.

Der kan være tale om:

Dansk standard

- standard, der er udarbejdet på nationalt niveau, eller som er baseret på et andet lands nationale standard, eller
- standard, der er udarbejdet på internationalt og/eller europæisk niveau, og som har fået status som dansk standard

DS-information

- publikation, der er udarbejdet på nationalt niveau, og som ikke har opnået status som standard, eller
- publikation, der er udarbejdet på internationalt og/eller europæisk niveau, og som ikke har fået status som standard, fx en teknisk rapport, eller
- · europæisk præstandard

DS-håndbog

samling af standarder, eventuelt suppleret med informativt materiale

DS-hæfte

· publikation med informativt materiale

Til disse publikationstyper kan endvidere udgives

tillæg og rettelsesblade

DS-publikationsform

Publikationstyperne udgives i forskellig form som henholdsvis

fuldtekstpublikation (publikationen er trykt i sin helhed)

godkendelsesblad (publikationen leveres i kopi med et trykt DS-omslag)
 elektronisk (publikationen leveres på et elektronisk medie)

DS-betegnelse

Alle DS-publikationers betegnelse begynder med DS efterfulgt af et eller flere præfikser og et nr., fx **DS 383**, **DS/EN 5414** osv. Hvis der efter nr. er angivet et **A** eller **Cor**, betyder det, enten at det er et **tillæg** eller et **rettelsesblad** til hovedstandarden, eller at det er indført i hovedstandarden.

DS-betegnelse angives på forsiden.

Overensstemmelse med anden publikation:

Overensstemmelse kan enten være IDT, EQV, NEQ eller MOD

• IDT: Når publikationen er identisk med en given publikation.

• EQV: Når publikationen teknisk er i overensstemmelse med en given publikation, men

præsentationen er ændret.

NEQ: Når publikationen teknisk eller præsentationsmæssigt ikke er i overensstemmelse med en

given standard, men udarbejdet på baggrund af denne.

MOD: Når publikationen er modificeret i forhold til en given publikation.

EUROPÄISCHE NORM

May 2017

ICS 45.120; 93.100

Supersedes EN 14033-2:2008+A1:2011

English Version

Railway applications - Track - Railbound construction and maintenance machines - Part 2: Technical requirements for travelling and working

Applications ferroviaires - Voie - Machines de construction et de maintenance empruntant exclusivement les voies ferrées - Partie 2 : Prescriptions techniques pour le déplacement et le travail

Bahnanwendungen - Oberbau - Schienengebundene Bau- und Instandhaltungsmaschinen - Teil 2: Technische Anforderungen an die Versetzfahrt und die Arbeitsstellung

This European Standard was approved by CEN on 3 September 2016.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Cont	Contents	
Europ	ean foreword	7
Intro	luction	9
1	Scope	. 10
1.1	General	. 10
1.2	Validity of this European Standard	11
2	Normative references	11
3	Terms and definitions	. 12
4	Field of use of machines	. 13
5	Specific railway requirements and/or measures	13
5.1	Interaction with the Infrastructure	
5.1.1	General	
5.1.2	Stress induced into the rails	
5.1.3	Auxiliary wheels, auxiliary guides and working parts	
5.1.4	Maximum wheel loads	
5.1.5	Loads applied to the ballast	
5.1.6	Loads applied to the formation	
5.1.7	Loads on structures	
5.2	Stability and safety against derailment	
5.2.1	Proof of overturning stability, machine stationary	
5.2.2	Prevention of derailment in travelling mode	
5.2.3	Prevention of derailment during working movements	
5.3	Machine gauge	
5.3.1	Stowing of moveable machine parts in travelling mode	
5.3.2	Working gauge	
5.3.3	Exceedance of gauge in working mode	
5.4	Working places	
5.4.1	General	
5.4.2	Arrangement of working places	
5.4.3	Work positions - Visibility	
5.4.4	Cabin windows used solely for working	
5.5	Access to working places	
5.5.1	General	
5.5.2	Access to working places	
5.6	Influences on the environment	
5.6.1	Exhaust gases	. 26
5.6.2	Noise levels outside the machine	
5.7	Electromagnetic compatibility	
5.8	Protection from risks due to electric traction equipment	
5.8.1	General	
5.8.2	Protection from live overhead lines	
5.8.3	Minimum safety distance between machine parts and overhead line equipment	
5.8.4	Minimum safety distance between machine parts and conductor rail	
5.8.5	Special earthing devices and/or protection from return traction currents	
5.8.6	Use of a pantograph for other than traction use	
5.9	Protection from the risks of fire	. 28

	material requirements	
5.9.2	Fire detection and extinguishing systems	
5.9.3	Fire extinguishing outside of the machine	
5.10	Lighting for work	
5.11	Visibility of machines	
	Marker lights for warning in travelling mode	
	Additional marker lights	
5.12	Braking	
	General	
	Stopping distances	
	Holding on gradients	
	Warning systems	
	System for warning personnel of traffic on adjacent tracks	
	System for warning in travelling mode	
5.14	Recovery conditions	
5.15	Data recording	
5.16	Parameters which influence ground based systems	
5.17	Traction equipment	
5.18	Laser equipment	
5.19	Remote control	. 32
6	Verification of the conformity to the requirements and/or particular safety	
U	measures	32
6.1	General	
6.2	Methods of testing	
6.2.1	General	
6.2.2	Visual check	
6.2.3	Measurement	
6.2.4	Functional test	
6.2.5	Load test(s)	
6.2.6	Specific verification/measurements	
	-	
7	User information	
7.1	General	
7.1.1	Instructions	
7.1.2	Special operating instructions	
	Maintenance instructions	
7.2	Warning signs and pictograms	. 35
8	Marking of machines	. 35
Annex	A (normative) Special national conditions	. 36
Annex	B (normative) Check list for conformity	. 41
Annex	C (normative) Warning plate	. 43
Anney	D (informative) Working gauge	44
D.1	General	
	Introduction	
D.1.2	Scope	
	List of symbols used	
D.1.5 D.2	Determination of the horizontal working limit	
D.2.1	General	
D.2.2	Characteristics of the working track and the machine	
D.2.3	Characteristics of a standard vehicle travelling on the adjacent line in service	

D. 3	calculation of the reductions for the limit line of rigure D.2, applicable to the	
	critical parts of the machine	48
D.4	Determination of clearance of the working parts	
D.4.1	General	
D.4.2	Method of calculation	
D.4.2 D.4.3	Addition for curvature, for working parts (Z_b)	
_		
D.4.4	Addition for cant (Zu)	
D.4.5	Addition for safety (z _s)	
D.4.6	Kinematic clearance necessary for a standard vehicle on the track in service (RE	
D.4.7	Possible exterior clearance for a working part (AW_z)	. 51
Annex	E (normative) Technical documentation	. 57
E.1	General	
E.2	General notices on the machine	
E.3	Assembly drawing indicating the following:	
E.4	Detailed drawings indicating the following:	
E.5		
	Detailed drawings with the following indications	
E.6	Technical details	
E.7	Possible functions of the working parts	. 58
Annex	F (normative) Limiting geometric parameters of the degraded working track	. 59
Annex	G (normative) Pictograms — Pictogram "Working direction"	. 60
Annov	H (informative) Method of calculating safety against derailment	61
H.1	Calculation of the safety against derailment	
H.1.1	General	
H.1.2	Calculation of the vehicle testing twist	
H.1.3	Limit value of the safety against derailment	
H.1.4	Guiding force and vertical wheel-load of the leading wheel	. 63
H.1.5	Guiding force and vertical wheel-load of the leading wheel in the working load	
	case	
H.1.6	Calculation of the torsional stiffness of the vehicle	
Annex	I (informative) Procedure for working authorization	. 67
I.1	General	. 67
I.2	Validity and application of the authorization to work	. 67
I.2.1	Validity	
I.2.2	Field of application	
I.2.3	Enlargement of field of application	
I.2.4	Withdrawal of the authorization to work	
I.2.5	Renewal of the authorization to work	
I.3	Applications for authorization to work	
I.4	Submission of the technical documentation	
1.4 I.5		
	Type testing	
I.6	Quality testing	
I.7	Type approval	
I.8	Examining the finished machine	
I.9	Authorization to work for machines identical to a machine that has received typapproval	
I.10	Refusal of working authorization	
I.10 I.11	Validity of working authorization	
I.11 I.12	Procedure for working agreement	
Annex	J (informative) Basis of calculations	
I.1	Machines without load control devices	. 71

J.Z	Machines with load control devices	71
Annex	K (informative) Instruction handbook	72
Annex	L (normative) Design specification for earthing pantograph(s) where permitted of	n
	individual infrastructures	
L.1 L.2	Object	
L.2 L.3	Position of the pantograph Maintaining contact between the equipotential contact strip and the contact wire	
L.4	Contact strip design	
L.5	Electrical connection between the equipotential pantograph head and the rail	
Annex	M (informative) Structure of European Standards for track construction and maintenance machines	77
Biblio	graphy	79
Tables	S	
Table	1 — Stress limit in the rails	14
Table	2 — Maximum wheel load with the machine in travelling and working mode for	
	machines without wheel load control devices	16
Table	3 —Maximum wheel load with the machine in working and travelling mode for	
	machine that do not lift a load or machine that lift a load with wheel load control	
	devices	
	4 — Load cases for calculating stability	
Table	5 — Load cases for testing prevention of overturning	20
Table	6 — Comparison of track parameters	21
Table	7 — Minimum safety distance between machine parts and overhead line equipme	nt27
Table	8 — Minimum safety distance between machine parts and conductor rails	27
Table	9 — Maximum stopping distances	30
Table	A.1 — Special national conditions	39
Table	B.1 — Determination of safety requirements and/or safety measures	41
Table	F.1 — Limiting geometric parameters of the degraded working track	59
Table	M.1 — Structure of European Standards for track construction and maintenance	
	machines	78
Figure	es	
Figure	e 1 — Cross section of rail showing stress points given in Table 1	14
Figure	e C.1 — Warning plate	43
Figure	e C.2 — Example of general warning sign	43
Figure	e D.1 — Position of working zones and the zone limit between the working track at the adjacent operating track	
Figure	e D.2 — Lateral working limit	49
Figure	e D.3 — Kinematic envelope necessary for a G1 or G2 gauge vehicle on a line open	to
	traffic on a curve of a radius 250 m ≤ R < 2 000 m	53

EN 14033-2:2017 (E)

rigure D.4 — Kinematic space KBK necessary for a G1 of G2 gauge standard v	enicie on
the operating track on a curve of with radius 2 000 m $\leq R < 4$ 000 m	
Figure D.5 — Kinematic space "RBk" necessary for a G1 or G2 gauge vehicle on operating track on a curve of with radius $R \ge 4000$ m	
Figure D.6 — Representation of calculating variants of the permissible working $AW_{\rm z}$	-
$ Figure \ G.1 - Example \ of \ pictograms \ denoting \ working \ directions.$	60
Figure I.1 — Procedure for working agreement	70
Figure L.1 —Principle of equipotential bonding (example)	74
Figure L.2 —Contact strip freedom of movement - Example of an equipotential pantograph	
Figure M.1 — Flowchart of European Standards for track construction and main machines	

European foreword

This document (EN 14033-2:2017) has been prepared by Technical Committee CEN/TC 256 "Railway applications", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2017, and conflicting national standards shall be withdrawn at the latest by November 2017.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 14033-2:2008+A1:2011.

This series of standards EN 14033, *Railway applications* — *Track* — *Railbound construction and maintenance machines*, consists of the following parts:

- Part 1: Technical requirements for running;
- Part 2: Technical requirements for travelling and working;
- Part 3: General safety requirements.

Amended clauses compared to EN 14033-2:2008+A1:2011:

General	Addition of travelling mode for machines, when moving between sites and not in running mode
General	All references updated to latest issue
5.1.2	Additional diagram added to clarify stress points
5.2.1.1	Devices attached to rail to prevent overturning have been forbidden
5.2.1.2	No longer permitted to exempt proof of stability by testing
5.2.2	New subclause for prevention of derailment in running mode
5.2.3.2.1	New Table 6 to show comparison between track parameters in EN 14363 and degraded working track
5.2.3.3	Rules for deviating from prevention of derailment extended for rail cranes
5.3.1	Requirements for gauge in travelling mode added
5.3.2.2.1	Lateral limit conditions in working mode clarified
5.3.2.2.2	More than one lateral working limit now permitted
5.3.2.2.4	Warning light colour changed from red to orange
5.3.3	Previous requirement for working limit in lower area withdrawn and replaced by general requirement about exceeding gauge
5.4.2	New requirement for work surface added
5.5.2	Requirement for steps and handrails added

EN 14033-2:2017 (E)

This is a preview of "DS/EN 14033-2:2017". Click here to purchase the full version from the ANSI store.

5.8.2	Reminder for size of electrical bonding added
5.8.6	New section for pantographs added
5.9.1	Material requirements updated
5.9.2	New section for fire detection and extinguishing systems added
5.11	Additional requirements for marker lights added
5.12.1	Additional requirement for travelling and working brake added
5.12.2	Relaxation permitted for stopping distance at slow speed, with additional requirements for brake architecture
5.12.3	Requirement for all potentially independent vehicles to have parking brake
5.13.2	Additional requirement for warning horn in travelling mode added
5.14	Recovery conditions deleted because duplicate to running mode
5.15	New section on data recorders added
5.16	New section on compatibility with ground based systems added
5.17	New section on traction equipment added
5.18	New section on laser equipment added
5.19	New section on remote control added
Clause 8	Service number requirements deleted because duplicate to running mode
Annexes	All annexes reviewed and updated
	Annex for certification withdrawn
Annex L	New annex on earthing pantographs added

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Introduction

This European Standard was prepared to meet the basic requirements of EU Directives to facilitate an open market for goods and services.

This document is the second of a series of three parts of the European Standard: *Railway applications* — *Track* — *Railbound construction and maintenance machines*:

- Part 1 covers the safety and technical requirements for the machines in running mode; this is a harmonized standard with the Technical Specification for Interoperability (TSI) for Locomotives and Passenger Rolling Stock Commission decision 2011/291/EU, which itself meets the essential requirements to ensure the interoperability of the rail system as described in Article 1 of European Directive 2008/57/EC;
- Part 2 covers the technical requirements for the machines in working and travelling modes;
- Part 3 covers the safety requirements for the machines in working and travelling modes; this is a harmonized standard with the European Machinery Directive 2006/42/EC.

For deviations or special national conditions, see Annex A.

The risks that exist in all mechanical, electrical, hydraulic, pneumatic and other components of machines and that are dealt with in the relevant European Standards are not within the scope of this European Standard. If necessary, references are made to appropriate standards of this type.

1 Scope

1.1 General

This European Standard defines the specific technical railway requirements for travelling and working with machines and other vehicles used for construction, maintenance and inspection of track, structures, track formation and fixed electric traction equipment as specified in EN 14033-1.

This European Standard applies to all railbound machines and other vehicles – referred to as machines – working exclusively on the railway (utilizing adhesion between the rail and rail wheels) and used for construction, maintenance and inspection of track, structures, infrastructure and fixed electric traction equipment.

This European Standard applies to machines that are intended to operate signalling and control systems. Other similar machines are dealt with in other European Standards, see Annex M.

This European Standard is applicable to 1 435 mm nominal track gauge. Some requirements may be applicable for working on infrastructures with nominal narrow track gauge or nominal broad track gauge lines, tramways, railways utilizing other than adhesion between the rail and rail wheels and underground infrastructures.

This European Standard covers the safety requirements for the railway specific problems for travelling and working on different infrastructures. The application of these requirements is the object of a verification procedure, which does not form part of this European Standard, but an Annex I is included for information. In all cases an authorization to work is needed to access the infrastructure.

This European Standard is also applicable for machines that in working position are partly supported on the ballast or the formation.

This European Standard does not apply to:

- the requirements with regard to the quality of work, including the related measuring methods, and the performance of the machine; 1)
- the specific requirements established by each railway infrastructure manager for the use of machines which will be the subject of negotiation between the manufacturer and the machine keeper.

This European Standard does not deal with the following additional requirements:

- working methods;
- operation in severe working conditions requiring special measures (e.g. work in tunnels or in cuttings, extreme environmental conditions such as high or low temperatures, corrosive environment, tropical environment, contaminating environments, strong magnetic fields);
- operation subject to special rules (e.g. potentially explosive atmospheres);
- hazards due to errors in software;
- hazards occurring when used to handle suspended loads which may swing freely;

¹⁾ Parameters for the measurement of track quality are dealt with in EN 13848-3.

— nazarus que to wind pressure greater than normal e.g. pressures caused by the passing or trains at speed in excess of 190 km/h.

1.2 Validity of this European Standard

This European Standard applies to all machines that are ordered one year after the publication date of this European Standard.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 280, Mobile elevating work platforms — Design calculations — Stability criteria — Construction — Safety — Examinations and tests

EN 1991-2, Eurocode 1: Actions on structures — Part 2: Traffic loads on bridges

EN 12077-2, Cranes safety — Requirements for health and safety — Part 2: Limiting and indicating devices

EN 12999, Cranes — Loader cranes

EN 14033-1:2017, Railway applications — Track — Railbound construction and maintenance machines — Part 1: Technical requirements for running

EN 14033-3:2017, Railway applications — Track — Railbound construction and maintenance machines — Part 3: General safety requirements

EN 14363:2016, Railway applications — Testing and Simulation for the acceptance of running characteristics of railway vehicles — Running Behaviour and stationary tests

EN 15273-2:2013+A1:2016, Railway applications — Gauges — Part 2: Rolling stock gauge

EN 15877-1:2012, Railway applications — Marking on railway vehicles — Part 1: Freight wagons

EN 45545-1, Railway applications — Fire protection on railway vehicles — Part 1: General

EN 45545-2:2013+A1:2015, Railway applications — Fire protection on railway vehicles — Part 2: Requirements for fire behaviour of materials and components

EN 50121-3-2, Railway applications — Electromagnetic compatibility — Part 3-2: Rolling stock — Apparatus

EN 50153:2014, Railway applications — Rolling stock — Protective provisions relating to electrical hazards

EN 50317, Railway applications — Current collection systems — Requirements for and validation of measurements of the dynamic interaction between pantograph and overhead contact line

EN ISO 7010:2012, *Graphical symbols* — *Safety colours and safety signs* — *Registered safety signs* (ISO 7010:2011)

EN 14033-2:2017 (E)

This is a preview of "DS/EN 14033-2:2017". Click here to purchase the full version from the ANSI store.

EN 150 7751, Ergonomics — Danger Signais for public and work areas — Additory danger Signais (ISO 7731)

ISO 4305:2014, Mobile cranes — Determination of stability

ISO 4310, Cranes — Test code and procedures

ISO 16754, Earth-moving machinery — Determination of average ground contact pressure for crawler machines

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 14033-1:2017 and the following apply.

3.1

working places

working cabs, combined working and driving cabs, operator's places situated outside cabs, welfare areas, locations where staff are permitted on the machine and places situated at control or maintenance locations

3.2

working gauge

limit in which a machine can work without interfering with the kinematic envelope of vehicles on adjacent operating tracks

3.3

operating track

track corresponding to the criteria of the infrastructure manager on which vehicles may run under normal signalling arrangements (with or without a speed limit)

3.4

working track

track that is being maintained for which one or several of the geometrical parameters may reach the limiting values as specified for operating

3.5

degraded working track

track that is degraded compared to the operating track and that is being maintained for which one or several of the geometrical parameters may reach the limiting values as specified in Annex F and for which special operational restrictions may apply

3.6

authorized acceptance body

body appointed by the infrastructure manager

3.7

working agreement

procedure that enables a machine to work on the network of one railway infrastructure manager

Note 1 to entry: This procedure consists of two parts:

1) the proof of conformity with the safety requirements, as specified in EN 14033–3 (EC declaration of conformity), given by the manufacturer;