

This is a preview of "ISO 10300-1:2014". [Click here to purchase the full version from the ANSI store.](#)

Second edition
2014-04-01

Calculation of load capacity of bevel gears —

Part 1: Introduction and general influence factors

*Calcul de la capacité de charge des engrenages coniques —
Partie 1: Introduction et facteurs généraux d'influence*



Reference number
ISO 10300-1:2014(E)

© ISO 2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

This is a preview of "ISO 10300-1:2014". Click here to purchase the full version from the ANSI store.

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Symbols and units	2
5 Application	8
5.1 Calculation methods.....	8
5.2 Safety factors.....	9
5.3 Rating factors.....	9
5.4 Further factors to be considered.....	10
5.5 Further influence factors in the basic formulae.....	11
6 External force and application factor, K_A	12
6.1 Nominal tangential force, torque, power.....	12
6.2 Variable load conditions.....	12
6.3 Application factor, K_A	13
7 Dynamic factor, K_V	13
7.1 General.....	13
7.2 Design.....	14
7.3 Manufacturing.....	14
7.4 Transmission error.....	14
7.5 Dynamic response.....	15
7.6 Resonance.....	15
7.7 Calculation methods for K_V	15
8 Face load factors, $K_{H\beta}$, $K_{F\beta}$	25
8.1 General documents.....	25
8.2 Method A.....	25
8.3 Method B.....	25
8.4 Method C.....	26
9 Transverse load factors, $K_{H\alpha}$, $K_{F\alpha}$	27
9.1 General comments.....	27
9.2 Method A.....	28
9.3 Method B.....	28
9.4 Method C.....	30
9.5 Running-in allowance, y_α	31
Annex A (normative) Calculation of virtual cylindrical gears — Method B1	35
Annex B (normative) Calculation of virtual cylindrical gears — Method B2	47
Annex C (informative) Values for application factor, K_A	53
Annex D (informative) Contact patterns	54
Bibliography	58

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 60, *Gears*, Subcommittee SC 2, *Gear capacity calculation*.

This second edition cancels and replaces the first edition (ISO 10300-1:2001), which has been technically revised.

ISO 10300 consists of the following parts, under the general title *Calculation of load capacity of bevel gears*:

- *Part 1: Introduction and general influence factors*
- *Part 2: Calculation of surface durability (pitting)*
- *Part 3: Calculation of tooth root strength*

This is a preview of "ISO 10300-1:2014". [Click here to purchase the full version from the ANSI store.](#)

Introduction

When ISO 10300:2001 (all parts, withdrawn) became due for (its first) revision, the opportunity was taken to include hypoid gears, since previously the series only allowed for calculating the load capacity of bevel gears without offset axes. The former structure is retained, i.e. three parts of the ISO 10300 series, together with ISO 6336-5, and it is intended to establish general principles and procedures for rating of bevel gears. Moreover, ISO 10300 (all parts) is designed to facilitate the application of future knowledge and developments, as well as the exchange of information gained from experience.

Several calculation methods, i.e. A, B and C, are specified, which stand for decreasing accuracy and reliability from A to C because of simplifications implemented in formulae and factors. The approximate methods in ISO 10300 (all parts) are used for preliminary estimates of gear capacity where the final details of the gear design are not yet known. More detailed methods are intended for the recalculation of the load capacity limits when all important gear data are given.

ISO 10300 (all parts) does not provide an upgraded calculation procedure as a method A, although it would be available, such as finite element or boundary element methods combined with sophisticated tooth contact analyses. The majority of Working Group 13 decided that neither is it sufficient for an International Standard to simply refer to such a complex computer program, nor does it make sense to explain it step by step in an International Standard.

On the other hand, by means of such a computer program, a new calculation procedure for bevel and hypoid gears on the level of method B was developed and checked. It is part of the ISO 10300 series as submethod B1. Besides, if the hypoid offset, a , is zero, method B1 becomes identical to the set of proven formulae of the former version of ISO 10300 (all parts):2001.


In view of the decision for ISO 10300 (all parts) to cover hypoid gears also, an annex, called: "Calculation of virtual cylindrical gears — Method B2", is included in this part of ISO 10300. Additionally, ISO 10300-2 is supplemented by a separate clause: "Gear flank rating formulae — Method B2"; regarding ISO 10300-3, it was agreed that the former method B2, which uses the Lewis parabola to determine the critical section in the root and not the 30° tangent at the tooth fillet as method B1 does, now be extended by the AGMA methods for rating the strength of bevel gears and hypoid gears. It was necessary to present a new, clearer structure of the three parts, which is illustrated in [Figure 1](#) (of this part of ISO 10300). Note, ISO 10300 (all parts) gives no preferences in terms of when to use method B1 and when method B2.

The procedures covered by ISO 10300 (all parts) are based on both testing and theoretical studies, but it is possible that the results obtained from its rating calculations might not be in good agreement with certain, previously accepted, gear calculation methods.

ISO 10300 (all parts) provides calculation procedures by which different gear designs can be compared. It is neither meant to ensure the performance of assembled gear drive systems nor intended for use by the average engineer. Rather, it is aimed at the experienced gear designer capable of selecting reasonable values for the factors in these formulae, based on knowledge of similar designs and on awareness of the effects of the items discussed.

NOTE Contrary to cylindrical gears, where the contact is usually linear, bevel gears are generally manufactured with profile and lengthwise crowning: i.e. the tooth flanks are curved on all sides and the contact develops an elliptical pressure surface. This is taken into consideration when determining the load factors by the fact that the rectangular zone of action (in the case of spur and helical gears) is replaced by an inscribed parallelogram for method B1 and an inscribed ellipse for method B2 (see [Annex A](#) for method B1 and [Annex B](#) for method B2). The conditions for bevel gears, different from cylindrical gears in their contact, are thus taken into consideration by the longitudinal and transverse load distribution factors.

This is a preview of "ISO 10300-1:2014". Click here to purchase the full version from the ANSI store.

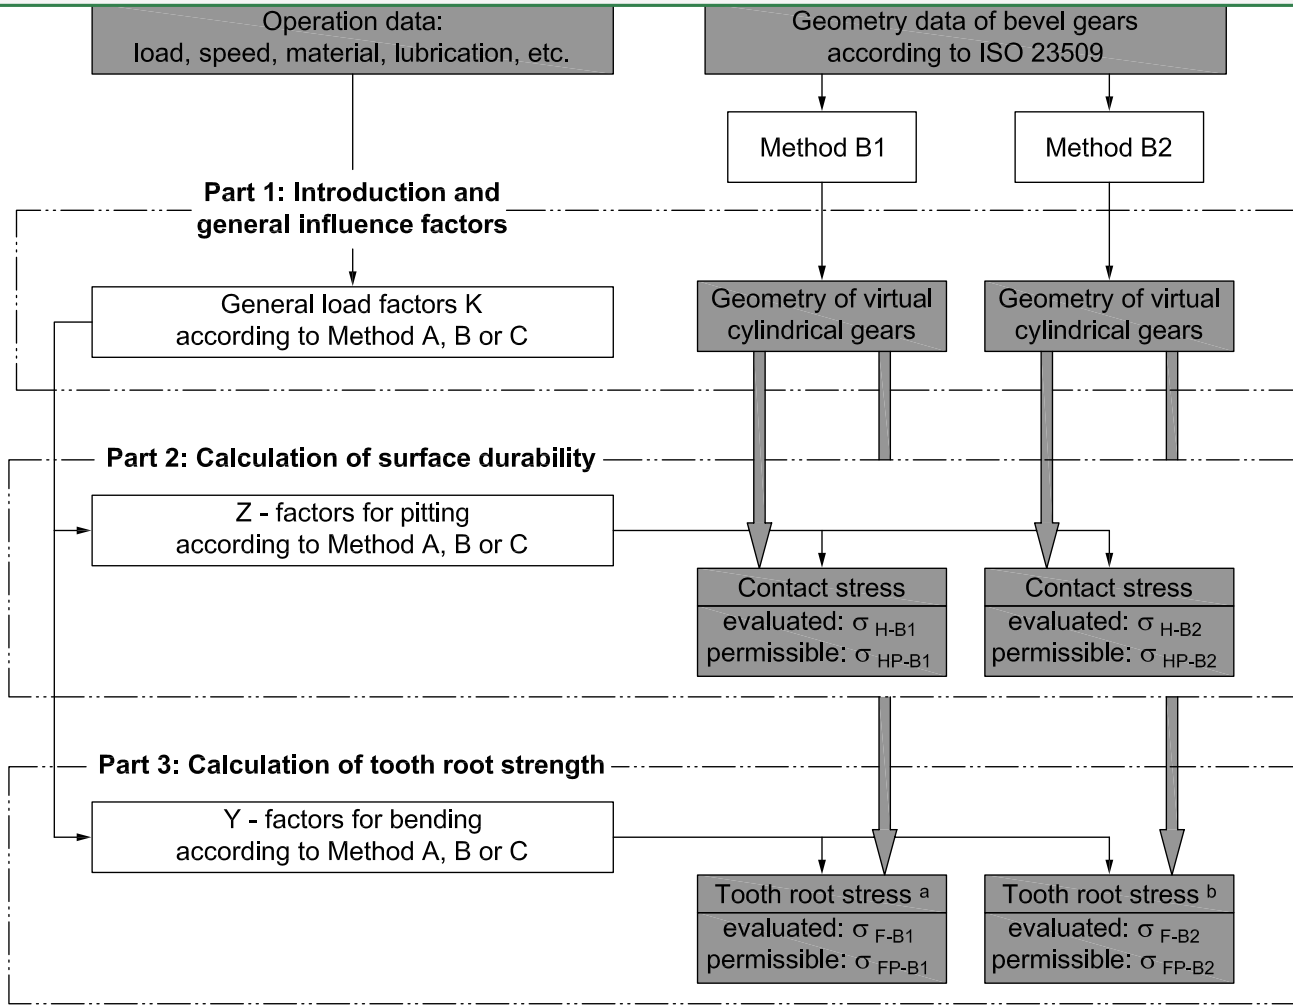

Key

- ^a One set of formulae for both, bevel and hypoid gears.
- ^b Separate sets of formulae for bevel and for hypoid gears.

Figure 1 — Structure of calculation methods in ISO 10300 (all parts)