

This is a preview of "ISO 18279:2003". [Click here to purchase the full version from the ANSI store.](#)

First edition
2003-12-15

Brazing — Imperfections in brazed joints

Brasage fort — Défauts dans les assemblages réalisés par brasage fort



Reference number
ISO 18279:2003(E)

© ISO 2003

This is a preview of "ISO 18279:2003". [Click here to purchase the full version from the ANSI store.](#)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

This is a preview of "ISO 18279:2003". [Click here to purchase the full version from the ANSI store.](#)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 18279 was prepared by the European Committee for Standardization (CEN) in collaboration with Technical Committee ISO/TC 44, *Welding and allied processes*, Subcommittee SC 12, *Soldering and brazing materials*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

Throughout the text of this document, read "...this European Standard..." to mean "...this International Standard...".

This is a preview of "ISO 18279:2003". [Click here to purchase the full version from the ANSI store.](#)

Contents

	Page
Foreword.....	v
Introduction	vi
1 Scope	1
2 Terms and definitions	2
3 Symbols	3
4 Classification	4
4.1 General	4
4.2 External imperfections	4
4.3 Internal imperfections	4
Annex A (informative) Guidelines for practical evaluation of imperfections	16
Annex B (informative) Evaluation	17
Bibliography	24

This is a preview of "ISO 18279:2003". [Click here to purchase the full version from the ANSI store.](#)

Foreword

This document (EN ISO 18279:2003) has been prepared by Technical Committee CEN/TC 121 "Welding", the secretariat of which is held by DS, in collaboration with Technical Committee ISO/TC 44 "Welding and allied processes".

This European Standard EN ISO 18279:2003 shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2004 and conflicting national standards shall be withdrawn at the latest by June 2004.

Annexes A and B are informative.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Slovakia, Spain, Sweden, Switzerland and the United Kingdom.

This is a preview of "ISO 18279:2003". [Click here to purchase the full version from the ANSI store.](#)

Introduction

Brazed joints usually contain imperfections of various types, some of which will be detrimental in almost every case but others may be detrimental or harmless, depending entirely on the service requirements of the joint in question. Therefore it will frequently be necessary to classify the imperfections in a brazed joint and then try to assess the significance of their effects on the behaviour of the joint in service. The classification is, relatively, easy and Table 1 describes the imperfections that most commonly occur. The assessment of significance is not easy (see also Annex A).

For welded joints, there has been extensive work carried out for many years on the significance of imperfections in service but such work has not been carried out on brazed joints. Moreover the work on welded joints is only rarely relevant to brazed joints, mainly because of differences in geometry and stressing. Therefore this standard cannot give definitive quality levels for brazed joints. These can only be produced as experience is gained from industrial applications. However, Annex B gives some suggestions for quality levels for general applications, which may be of help where detailed information is not available. It has to be emphasized that the use of quality levels can only be successful if the imperfections that are relevant to the application of the brazed joint are determined.

This is a preview of "ISO 18279:2003". [Click here to purchase the full version from the ANSI store.](#)

1 Scope

This European Standard details a classification of imperfections that can occur in brazing joints. In addition guidance is provided on quality levels and suggested limits for imperfections are detailed.

For requirements not covered by this standard, reference is to be made to other sources, e.g. statutory regulations, codes of practice and technical delivery conditions.

No information is given on how imperfections are to be assessed in individual cases because this depends on the requirements for the particular brazed joint. These imperfections are not always detectable by the use of non-destructive testing alone.


The standard covers only imperfections that can occur in connection with brazing without the effect of any additional service loads. Only the type, shape and position of such imperfections are covered; no indication is given of the conditions of occurrence or causes.

For requirements for brazed joints which are relevant and essential to the particular function of the component, reference should be made to the relevant documentation, e.g. manufacturing documents or procedure sheets.


NOTE It is important that these requirements be precisely prescribed and that compliance with them be verifiable. Compliance may be established by testing either the brazed assembly itself or a test piece produced under comparable conditions. The requirements should be established and fully documented before any classification is undertaken.

This European Standard does not lay down requirements for acceptance levels for imperfections since these will differ very markedly, depending on the application, but it does suggest some quality levels which may be of value in the absence of more detailed information.

This is a preview of "ISO 18279:2003". Click here to purchase the full version from the ANSI store.

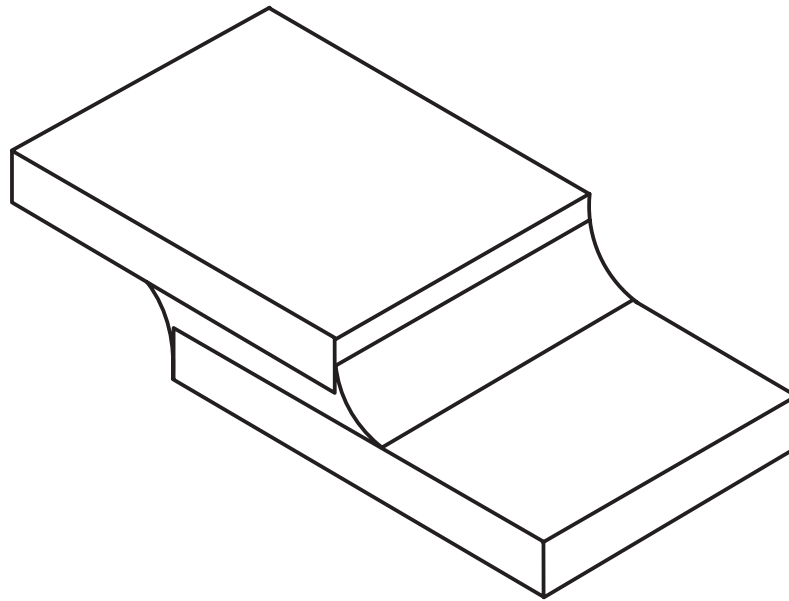

a) Simple brazed assembly

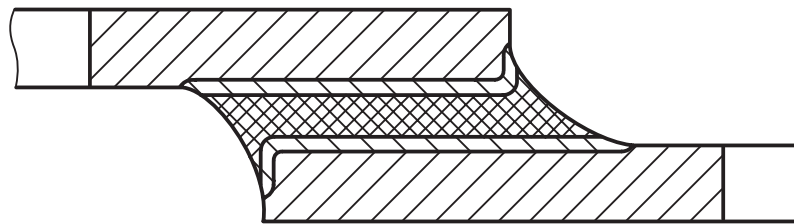

Key



Parent material



Parent material affected by brazing (heat affected zone (HAZ))



Diffusion-transition zone



Braze metal

NOTE Extent of HAZ will vary with materials and brazing process.

b) Section through assembly in a)

Figure 1 — Schematic of brazed assembly

2 Terms and definitions

For the purposes of this European Standard the areas of a brazed assembly are defined as shown schematically in Figure 1. In addition the following term and definition apply.