

This is a preview of "ISO/IEC 11518-3:1996". [Click here to purchase the full version from the ANSI store.](#)

STANDARD

11518-3

First edition
1996-06-15

Information technology — High-Performance Parallel Interface —

Part 3:

Encapsulation of ISO/IEC 8802-2 (IEEE Std 802.2)
Logical Link Control Protocol Data Units (HIPPI-LE)

Technologies de l'information — Interface parallèle à haute performance —

Partie 3: Encapsulation de l'ISO/CEI 8802-2 (IEEE Std 802.2) unités de données du protocole de contrôle de liaison logique (HIPPI-LE)



Reference number
ISO/IEC 11518-3:1996(E)

Contents

	Page
Foreword	ii
Introduction	iv
1 Scope.....	1
2 Normative references	1
3 Definitions and conventions.....	1
3.1 Definitions	1
3.2 Editorial conventions	1
4 HIPPI-LE services to ISO/IEC 8802-2 LLC	2
4.1 Service primitives types	2
4.2 Sequences of primitives.....	2
4.3 HIPPI-LE service primitive summary	2
4.4 HIPPI-LE transfer service primitives	3
4.5 HIPPI-LE address resolution primitives	4
4.6 HIPPI-LE station management service primitives	5
5 HIPPI-FP data framing services used by HIPPI-LE.....	6
6 HIPPI-LE data formats.....	6
6.1 HIPPI-LE PDU format	6
6.2 ISO/IEC 8802 48-bit address format.....	8
7 HIPPI Address Resolution	8
7.1 Overview	8
7.2 Address Resolution in Detail.....	8
Annexes	
A Example HIPPI packets containing HIPPI-LE PDUs	11
B Bibliography	15
Alphabetical index	16
Figures	
1 Protocol hierarchy	iv
2 HIPPI-LE service relationship	2
3 Data transfer service primitives	3
4 HIPPI-LE Address resolution service primitives	4
5 Station management service primitives.....	5
6 HIPPI-LE header format	7
7 Mapping of 6-byte ISO/IEC 8802-2 universal LAN MAC address to two 32-bit HIPPI words in LE_Header.....	7

© ISO/IEC 1996

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75% of the national bodies casting a vote.

International Standard ISO/IEC 11518-3 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology, Subcommittee SC 25, Interconnection of information technology equipment*.

ISO/IEC 11518 consists of the following parts, under the general title *Information technology – High-Performance Parallel Interface*:

- Part 1: *Mechanical, electrical, and signalling protocol specification (HIPPI-PH)*
- Part 2: *Framing Protocol (HIPPI-FP)*
- Part 3: *Encapsulation of ISO/IEC 8802-2 (IEEE Std 802.2) Logical Link Control Protocol Data Units (HIPPI-LE)*
- Part 4: *Mapping of HIPPI to IPI device generic command sets (HIPPI-IPI)*
- Part 5: *Memory Interface (HIPPI-MI)*
- Part 6: *Physical Switch Control (HIPPI-SC)*

Annexes A and B of this part of ISO/IEC 11518 are for information only.

Introduction

This part of ISO/IEC 11518 defines the HIPPI-LE Protocol Data Unit (PDU) format and interface for transporting ISO/IEC 8802-2 Logical Link Control PDUs over HIPPI.

Characteristics of this HIPPI-LE include

- Encapsulation of arbitrary Protocol Data Units that conform to ISO/IEC 8802-2 Logical Link Control;
- Provision for 48-bit source and destination addresses conforming to ISO/IEC 8802-1;
- Provision for eight forwarding classes to distinguish, for example, among ordinary data PDUs, PDUs for services that require bandwidth guarantees such as packet video, etc.

Figure 1 shows the relationship of this part of ISO/IEC 11518 (in the solid rectangle) with the other entities shown.

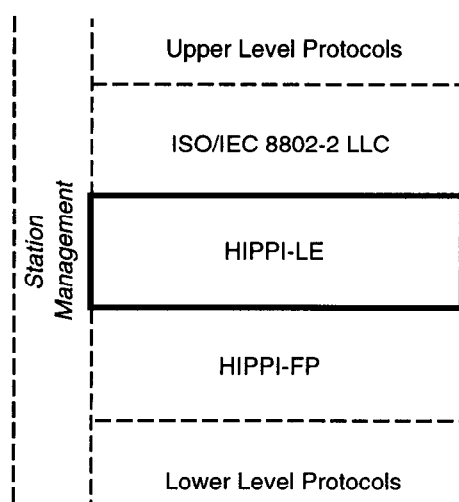


Figure 1 – Protocol hierarchy