

MSS SP-9-2013

Spot Facing for Bronze, Iron, and Steel Flanges

Standard Practice
Developed and Approved by the
Manufacturers Standardization Society of the
Valve and Fittings Industry, Inc.
127 Park Street, NE
Vienna, Virginia 22180-4602
Phone: (703) 281-6613
Fax: (703) 281-6671
E-mail: standards@mss-hq.org



www.mss-hq.org

This MSS Standard Practice was developed under the consensus of the MSS Technical Committees 102, 110, 201, and the MSS Coordinating Committee. The content of this Standard Practice is the resulting efforts of competent and experienced volunteers to provide an effective, clear, and non-exclusive standard that will benefit the industry as a whole. This MSS Standard Practice describes minimal requirements and is intended as a basis for common practice by the manufacturer, the user, and the general public. The existence of an MSS Standard Practice does not in itself preclude the manufacture, sale, or use of products not conforming to the Standard Practice. Mandatory conformance to this Standard Practice is established only by reference in other documents such as a code, specification, sales contract, or public law, as applicable. MSS has no power, nor does it undertake, to enforce or certify compliance with this document. Any certification or other statement of compliance with the requirements of this Standard Practice shall not be attributable to MSS and is solely the responsibility of the certifier or maker of the statement.

“Unless indicated otherwise within this MSS Standard Practice, other standards documents referenced to herein are identified by the date of issue that was applicable to this Standard Practice at the date of approval of this MSS Standard Practice (see Annex A). This Standard Practice shall remain silent on the validity of those other standards of prior or subsequent dates of issue even though applicable provisions may not have changed.”

By publication of this Standard Practice, no position is taken with respect to the validity of any potential claim(s) or of any patent rights in connection therewith. MSS shall not be held responsible for identifying any patent rights. Users are expressly advised that determination of patent rights and the risk of infringement of such rights are entirely their responsibility.

In this Standard Practice, all text, notes, annexes, tables, figures, and references are construed to be essential to the understanding of the message of the standard, and are considered normative unless indicated as “supplemental”. All appendices, if included, that appear in this document are construed as “supplemental”. Note that supplemental information does not include mandatory requirements.

Substantive changes in this 2013 edition are “flagged” by parallel bars as shown on the margins of this paragraph. The specific detail of the change may be determined by comparing the material flagged with that in the previous edition.

The (SI) metric units and U.S. customary units in this Standard Practice are regarded separately as the standard; each should be used independently of the other. Combining or converting values between the two systems may result in non-conformance with this Standard Practice.

Non-toleranced dimensions in this Standard Practice are nominal unless otherwise specified.

Excerpts of this Standard Practice may be quoted with permission. Credit lines should read ‘Extracted from MSS SP-9-2013 with permission of the publisher, Manufacturers Standardization Society of the Valve and Fittings Industry’. Reproduction and/or electronic transmission or dissemination is prohibited under copyright convention unless written permission is granted by the Manufacturers Standardization Society of the Valve and Fittings Industry Inc. All rights reserved.

Originally Approved: July 1929
Originally Published: August 1929
Current Edition Approved: October 2012
Current Edition Published: March 2013

MSS is a registered trademark of the Manufacturers Standardization Society of the Valve and Fittings Industry, Inc.

Copyright ©, 2013 by
Manufacturers Standardization Society
of the
Valve and Fittings Industry, Inc.

Printed in U.S.A.

This Page Intentionally Left Blank

Manufacturers Standardization Society of the Valve and Fittings Industry

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
1 SCOPE	1
2 DESIGN	1

TABLE

1 Spot Face Diameters – U.S. Customary (Inch-Series)	3
2 Spot Face Diameters – (SI) Metric Bolting	4

FIGURE

1 Flange with Spot Facing	1
---------------------------------	---

ANNEX

A Referenced Standards and Applicable Dates	5
---	---

SPOT FACING FOR BRONZE, IRON, AND STEEL FLANGES

1. SCOPE

1.1 This MSS Standard Practice applies to the spot facing for U.S. customary (inch-series) bolting of pipe flanges in bronze, gray iron, ductile iron, or steel when cast integral with valves and fittings, as well as the companion flanges, when so required by the standard for the product.

1.2 This Standard Practice also applies to the spot facing for (SI) metric bolting used in bolted joints not covered by the referenced flange standards herein.

2. DESIGN

2.1 *U.S. Customary (Inch-Series) Bolting*

2.1.1 The dimensions for spot facing apply to the use of hexagon head bolts or hexagon nuts in accordance with ASME B18.2.1 and ASME B18.2.2 (heavy series). For bolt sizes 1/2 and 5/8, the minimum diameter of spot facing is sufficient for regular square head bolts, in accordance with ASME B18.2.1.

2.1.2 The minimum spot facing diameters illustrated in Figure 1, are listed in Table 1 for bolt sizes 1/2 inch through 3 1/2 inches.

2.1.3 The bolt sizes, for which spot facing is provided, include all the inch-series bolt sizes required in the various flange standards indicated below:

Bronze

ASME B16.24, Cast Copper Alloy Pipe Flanges and Flanged Fittings: Class 150, 300, 600, 900, 1500, and 2500

MSS SP-106, Cast Copper Alloy Flanges and Flanged Fittings: Class 125, 150, and 300

Gray Iron

ASME B16.1, Gray Iron Pipe Flanges and Flanged Fittings: Class 25, 125, and 250

Ductile Iron

ASME B16.42, Ductile Iron Pipe Flanges and Flanged Fittings: Class 150 and 300

Steel

ASME B16.5, Pipe Flanges and Flanged Fittings: NPS 1/2 through 24 Metric/Inch Standard

ASME B16.47 Large Diameter Steel Flanges: NPS 26 through NPS 60 Metric/Inch Standard

MSS SP-44 Steel Pipeline Flanges

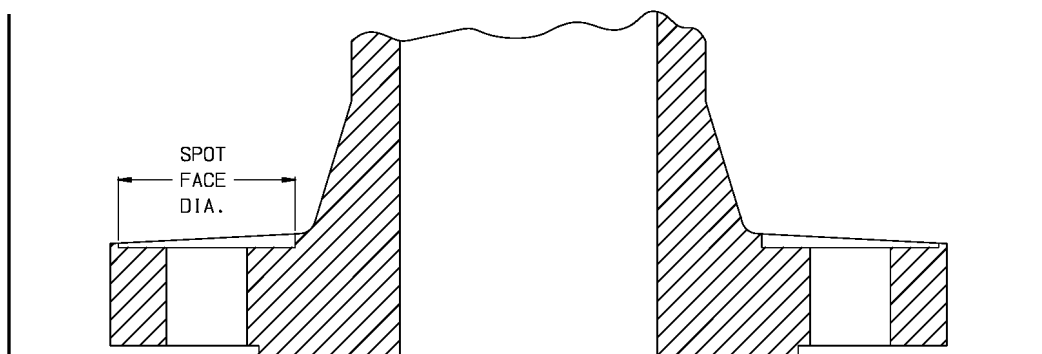


FIGURE 1 Flange with Spot Facing