

This is a preview of "ISO 17321-1:2012". [Click here to purchase the full version from the ANSI store.](#)

Second edition
2012-11-01

Graphic technology and photography — Colour characterisation of digital still cameras (DSCs) —

Part 1: Stimuli, metrology and test procedures

*Technologie graphique et photographie — Caractérisation de la
couleur des appareils photonumériques —*

Partie 1: Stimuli, métrologie et modes opératoires d'essai



Reference number
ISO 17321-1:2012(E)

© ISO 2012



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

This is a preview of "ISO 17321-1:2012". [Click here to purchase the full version from the ANSI store.](#)

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 DSC colour characterization methods	2
4.1 General.....	2
4.2 Spectral sensitivity-based characterization — Method A.....	3
4.3 Target-based characterization — Method B.....	4
Annex A (informative) Recommended laboratory set-up for photographing a reflection colour test target	8
Annex B (informative) Digital still camera/sensitivity metamerism index (DSC/SMI)	10
Annex C (informative) Characterization target considerations	16
Annex D (informative) Calculating natural scene element responses from spectral characterization data	23
Bibliography	26

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 17321-1 was prepared by Technical Committee ISO/TC 42, *Photography*, in collaboration with ISO/TC 130, *Graphic technology*.

This second edition cancels and replaces the first edition (ISO 17321-1:2006), of which it constitutes a minor revision with the following changes:

- in 4.3.3.4.2, the typographical error “senor image area” was corrected to “sensor image area”;
- in B.2.6, a broken link to tools for non-linear optimization has been updated.

ISO 17321 consists of the following parts, under the general title *Graphic technology and photography — Colour characterization of digital still cameras (DSCs)*:

- *Part 1: Stimuli, metrology and test procedures*
- *Part 2: Considerations for determining scene analysis transforms* [Technical Report]

This is a preview of "ISO 17321-1:2012". [Click here to purchase the full version from the ANSI store.](#)

Introduction

The spectral responses of the colour analysis channels of digital still cameras (DSCs) do not, in general, match those of a typical human observer, such as defined by the CIE standard colorimetric observer. Nor do the responses of different DSCs ordinarily match each other. In characterizing DSCs, it is therefore necessary to take account of the DSC spectral sensitivities, illumination, and encoding colour space. This part of ISO 17321 will begin to address these considerations. This part of ISO 17321 defines stimuli (spectral illumination or a colour target), metrology and photographic test procedures for acquiring DSC characterization data. It specifies test procedures for "scenes", the most general picture taking conditions where metameric colours and a range of illumination sources are encountered. It also specifies test procedures for hardcopy "originals", a more narrowly defined picture-taking condition in which the illumination source and the colorants being imaged are pre-defined.

ISO 17321 will distinguish among several possible image representations in different colour encodings as depicted in Figure 1 which shows the diagram of a generic image workflow for digital photography.

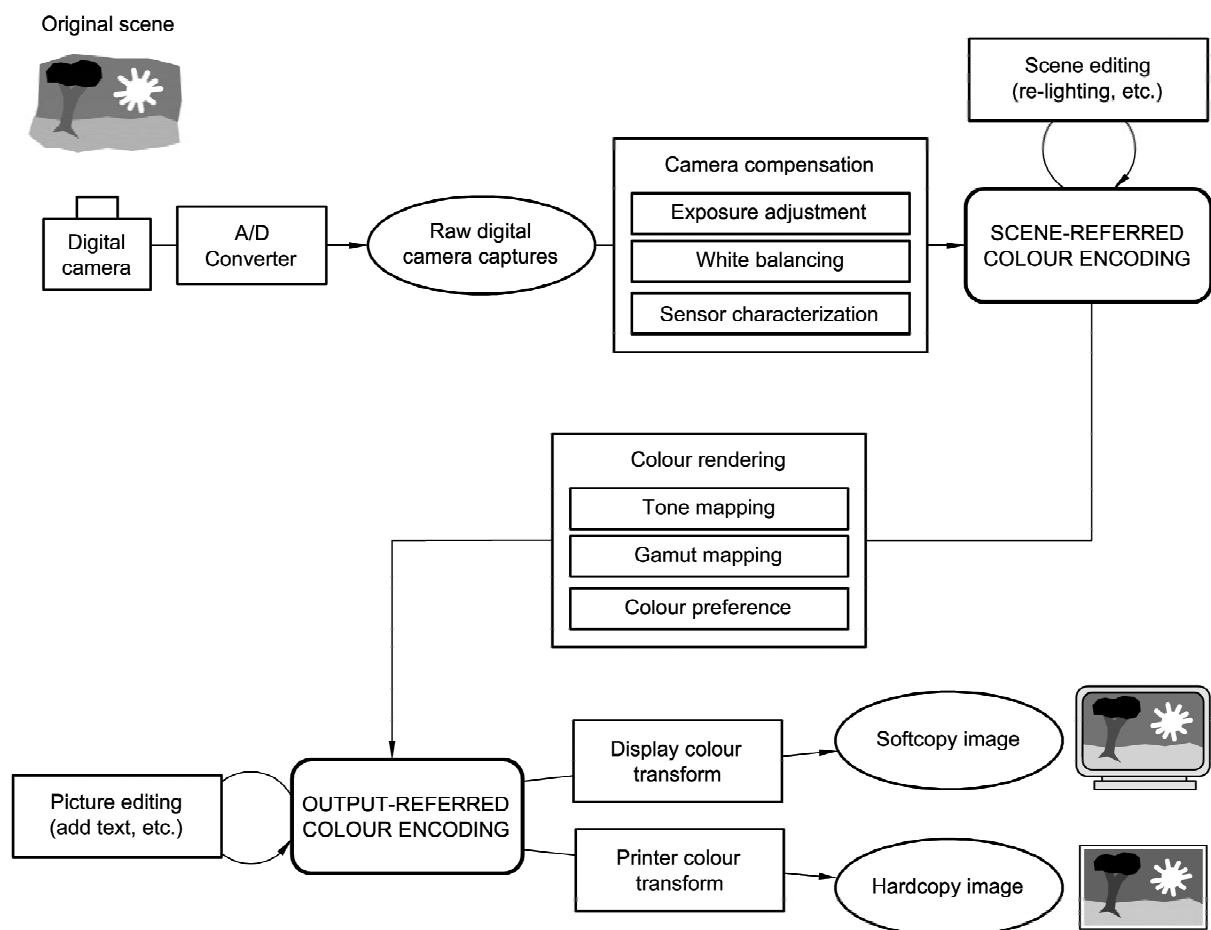


Figure 1 — Generic image workflow for digital photography

The DSC characterizations obtained using this part of ISO 17321 will be applicable to raw (sensor-referred) DSC data. Two alternative methods are described for obtaining these characterization data. Method A, the spectral method, uses spectral lights as stimuli for measuring the colour performance of a DSC. Method B, the target method, involves the use of a physical colour test target under specific lighting conditions to measure DSC colour performance. Annexes A to C recommend a laboratory set-up for photographing reflection targets, provide target patch selection criteria, and provide a digital still camera metamerism index.

This is a preview of "ISO 17321-1:2012". [Click here to purchase the full version from the ANSI store.](#)

Some operations (colour pixel reconstruction, flare removal, white balancing) can be performed without disqualifying the DSC data as being raw. However, operations that render the image data so that they become output-referred (ready to display or to print) generally do disqualify the data. With such cameras, this standard can only be applied if the capability exists to extract or to regenerate raw data, e.g. by applying the inverse of the rendering transform or by tapping the appropriate signals internal to the camera.

The technical experts who have developed this part of ISO 17321 recognize that a standard that could be applied generally to any (not just raw) DSC output would be desirable. Such a standard is problematic for DSCs that employ colour-rendering algorithms in order to produce output-referred image data. For such DSCs, it would frequently be impossible to determine if colour analysis errors relative to the scene or original captured were due to sensor image encoding errors or to proprietary colour rendering algorithms. The only way to make this distinction is if the colour rendering used is well documented and available, and the rendered data can be converted to un-rendered data by inverting the colour rendering. This situation is unlikely to occur because one of the major differentiators in DSC performance is the colour rendering. Sophisticated colour-rendering algorithms can be image dependent, and locally varying within an image. This makes it extremely difficult to reliably determine the exact colour rendering used by analysing captured test scenes.

The purpose of this part of ISO 17321 is both to assist in the characterization of DSCs for colour management purposes and to assist camera manufacturers in the determination of the colour analysis capabilities of DSCs that they are developing. This standard is applicable to any DSC intended for photographic or graphic technology applications. However, for many users it is not practical to apply this part of ISO 17321 to individual DSCs. Some of the measurements described in this part of ISO 17321 require complex, expensive measurement equipment. In the case of test targets that are commercially produced, spectral as well as colorimetric measurement data would ideally accompany the target.

Those unfamiliar with this part of ISO 17321 are encouraged to read through the entire standard (in particular the informative annexes) before proceeding with DSC characterization, in order to verify appropriateness for their particular application. In some cases, the procedures described in the multimedia standard, IEC 61966-9^[5] might be more applicable.

It is proposed that other parts of ISO 17321 will be developed in the future to deal with other aspects of the colour characterization of digital still cameras.