

This is a preview of "AWWA B501-2019". [Click here to purchase the full version from the ANSI store.](#)



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA B501-19**  
(Revision of ANSI/AWWA B501-13)

**AWWA Standard**

# Sodium Hydroxide (Caustic Soda)

Effective date: Dec. 1, 2019.  
First edition approved by AWWA Board of Directors July 1, 1949.  
This edition approved June 7, 2019.  
Approved by American National Standards Institute on July 9, 2019.




## AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

## American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

**CAUTION NOTICE:** The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; (212) 642-4900, or emailing [info@ansi.org](mailto:info@ansi.org).

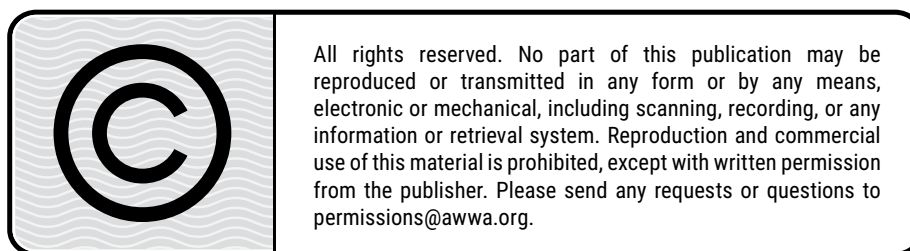

ISBN-13, print: 978-1-62576-361-7

ISBN-13, electronic: 978-1-61300-531-6

DOI: <http://dx.doi.org/10.12999/AWWA.B501.19>

---

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2019 by American Water Works Association  
Printed in USA

## Committee Personnel

The AWWA Standards Committee on Softening and Conditioning Chemicals, which reviewed and approved this standard, had the following personnel at the time of approval:

Clyde R. Dugan, *Chair*

*General Interest Members*

W.J. Conlon, Parsons Corporation, Tampa, Fla.

N.J. Edman,\* Standards Group Liaison, AWWA, Denver, Colo.

N.E. McTigue,\* Cornwell Engineering Group, Newport News, Va.

J. Mercer, HDR, Pittsburgh, Pa.

H. Steiman, Newton, Mass.

R. Vaidya, Greeley and Hansen, LLC, Maitland, Fla.

M.H. Winegard, AECOM, Wheaton, Ill.

*Producer Members*

R.A. Brandau, Chemtrade, Parsippany, N.J.

J.M. Shepard, Middletown, Del.

*User Members*

C.R. Dugan, East Lansing (Mich.) Meridian Water and Sewer Authority

S.M. Soltau, Pinellas County Utilities, Largo, Fla.

D.A. Visintainer, City of St. Louis (Mo.) Water Division

---

\* Liaison, nonvoting

This is a preview of "AWWA B501-2019". [Click here to purchase the full version from the ANSI store.](#)

This page intentionally blank.

## Contents

*All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.*

SEC.	PAGE	SEC.	PAGE
<b>Foreword</b>		<b>3</b>	<b>Definitions</b> ..... 2
I	Introduction..... vii	<b>4</b>	<b>Requirements</b>
I.A	Background..... vii	4.1	Physical Requirements ..... 3
I.B	History..... vii	4.2	Chemical Requirements ..... 3
I.C	Acceptance ..... vii	4.3	Impurities ..... 3
II	Special Issues ..... viii	<b>5</b>	<b>Verification</b>
II.A	Safety ..... viii	5.1	Sampling ..... 4
III	Use of This Standard ..... ix	5.2	Test Procedures ..... 5
III.A	Purchaser Options and Alternatives ... ix	5.3	Alkali (Na <sub>2</sub> O)..... 5
III.B	Modification to Standard ..... x	5.4	Hydroxide ..... 6
IV	Major Revisions..... x	5.5	Sodium Carbonate ..... 7
V	Comments ..... x	5.6	Notice of Nonconformance..... 7
<b>Standard</b>		<b>6</b>	<b>Delivery</b>
<b>1</b>	<b>General</b>	6.1	Marking ..... 8
1.1	Scope ..... 1	6.2	Packaging and Shipping ..... 8
1.2	Purpose ..... 1	6.3	Affidavit of Compliance ..... 10
1.3	Application ..... 1		
<b>2</b>	<b>References</b> ..... 2		

This is a preview of "AWWA B501-2019". [Click here to purchase the full version from the ANSI store.](#)

This page intentionally blank.

## Foreword

*This foreword is for information only and is not a part of ANSI\*/AWWA B501.*

### I. Introduction

I.A. *Background.* Sodium hydroxide, NaOH (also known as caustic soda), is available in liquid form in two common concentrations: 50 percent NaOH and 73 percent NaOH. On special request, other solution concentrations, including 25 and 20 percent solutions, are available. Sodium hydroxide is also available as anhydrous sodium hydroxide, containing at least 96 percent NaOH. The 50 percent sodium hydroxide solution begins to crystallize at approximately 54°F (12°C), and the 73 percent concentration begins to crystallize at approximately 145°F (63°C). The 25 percent solution begins to crystallize at approximately 8°F (–13°C).

I.B. *History.* The first edition of this standard for sodium hydroxide was prepared under the direction of the Water Purification Division of AWWA. The first edition was approved by the AWWA Board of Directors on July 1, 1949. On Oct. 15, 1951, the AWWA Board of Directors reaffirmed the standard and designated it as AWWA B501-51T. In 1953, the designation was changed to AWWA B501-53. Subsequent revisions were prepared by the AWWA Standards Committee in 1964, 1975, 1980, 1988, 1993, 1998, 2003, 2008, and 2013. This edition was approved on June 7, 2019.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the American Water Works Association Research Foundation (AwwaRF, now Water Research Foundation<sup>†</sup>) and the Conference of State Health and Environmental Managers (COSHEM). AWWA and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.<sup>‡</sup> Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local

---

\* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

<sup>†</sup> Water Research Foundation, 6666 West Quincy Avenue, Denver, CO 80235.

<sup>‡</sup> Persons outside the United States should contact the appropriate authority having jurisdiction.

agencies may use various references, including two standards developed under the direction of NSF,\* NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 60. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdiction. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 60 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA B501 addresses additives requirements in Sec. 4.3.2 of the standard. The transfer of contaminants from chemicals to processed water or to residual solids is becoming a problem of great concern. The language in Sec. 4.3.2 is only a recommendation for direct additives used in the treatment of potable water to be certified by an accredited certification organization in accordance with NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects. However, users of the standard may opt to make this certification a requirement for the product. Users of this standard should also consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

## **II. Special Issues**

II.A. *Safety.* Sodium hydroxide is usually shipped in insulated tank cars or tank trucks and should arrive at the receiving point in liquid form. Depending on geographical location, tank cars are usually equipped with coils for steam heating. When unloading the sodium hydroxide, carefully follow the manufacturer’s unloading procedures. In climates where storage temperatures are below the solidification point for the grade of sodium hydroxide received, the material may be diluted on unloading to a concentration that will not solidify or require heated storage. Softened water should be

---

\* NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.



used to dilute sodium hydroxide to prevent precipitation of calcium carbonate, which can clog feed equipment.

If the anhydrous form of sodium hydroxide is used, it should be carefully dissolved in water to prepare the desired strength of solution. A sodium hydroxide solution may be fed by conventional liquid-chemical-feeding equipment. However, when purchasing chemical-feeding equipment, the fact that a caustic solution is to be handled should be specified.

**CAUTION:** The handling of sodium hydroxide in all forms involves several extreme hazards. Considerable heat is generated in the dilution process. Therefore, the rate of dilution, methods of cooling, and equipment and piping materials selected should be carefully controlled so that the liquid does not boil, splatter, or result in failure of storage and handling facilities.

Because sodium hydroxide can cause severe burns to the skin and eyes, workers handling sodium hydroxide must wear complete protective equipment. This should include head covering, chemical workers' goggles, cotton clothing (sodium hydroxide dissolves wool), long-sleeved shirt with buttoned collar, rubber apron, sleeves over rubber gloves, and trousers over rubber work shoes. Emergency shower and eyewash units should be located near feeding and pumping equipment, where sodium hydroxide is sampled, and where tank cars or trucks are connected or disconnected. Refer to safety data sheets (SDSs) available from the chemical supplier or manufacturer for additional information.

**III. Use of This Standard.** It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

**III.A. Purchaser Options and Alternatives.** The following information should be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA B501, Sodium Hydroxide (Caustic Soda), of latest revision.
2. Quantity required.
3. Whether compliance with NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, is required.
4. Details of federal, state, and local requirements (Section 4).
5. Type of material—anhydrous or liquid (Sec. 4.1).
6. For liquid sodium hydroxide, the percentage of sodium hydroxide (Sec. 4.2.2).

7. Whether the purchaser will reject product from containers or packaging with missing or damaged seals. The purchaser may reject product from bulk containers or packages with missing or damaged seals unless the purchaser's tests of representative samples, conducted in accordance with Sec. 5.3 through Sec. 5.5, demonstrate that the product meets the standard. Failure to meet the standard or the absence of, or irregularities in, seals may be sufficient cause to reject the shipment.

8. Form of shipment—bulk or package, type, and size (Sec. 6.2).

9. Whether alternative security measures have been adopted to replace or augment the security measures set out in Sec. 6.2.5 and 6.2.6.

10. Affidavit of compliance, or certified analysis, if required (Sec. 6.3).

III.B. *Modification to Standard.* Any modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

**IV. Major Revisions.** Major revisions made to the standard in this edition include the following:

1. Inclusion of NSF/ANSI 61 in I.C. *Acceptance*.
2. Updates to boilerplate language in the following sections:
  - Impurities (Sec. 4.3)
  - Notice of Nonconformance (Sec. 5.6)
  - Packaging and Shipping (Sec. 6.2)
  - Affidavit of Compliance (Sec. 6.3)

**V. Comments.** If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603, write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098, or email at [standards@awwa.org](mailto:standards@awwa.org).



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA B501-19**  
(Revision of ANSI/AWWA B501-13)

**AWWA Standard**

---

# Sodium Hydroxide (Caustic Soda)

---

## SECTION 1: GENERAL

---

### **Sec. 1.1 Scope**

This standard describes sodium hydroxide, anhydrous and liquid, for use in the treatment of potable water, wastewater, or reclaimed water.

### **Sec. 1.2 Purpose**

The purpose of this standard is to provide the minimum requirements for sodium hydroxide, including physical, chemical, sampling, testing, packaging, and shipping requirements.

### **Sec. 1.3 Application**

This standard can be referenced in documents for purchasing and receiving sodium hydroxide and can be used as a guide for testing the physical and chemical properties of sodium hydroxide samples. The stipulations of this standard apply when this document has been referenced and then only to sodium hydroxide used in the treatment of potable water, wastewater, or reclaimed water.